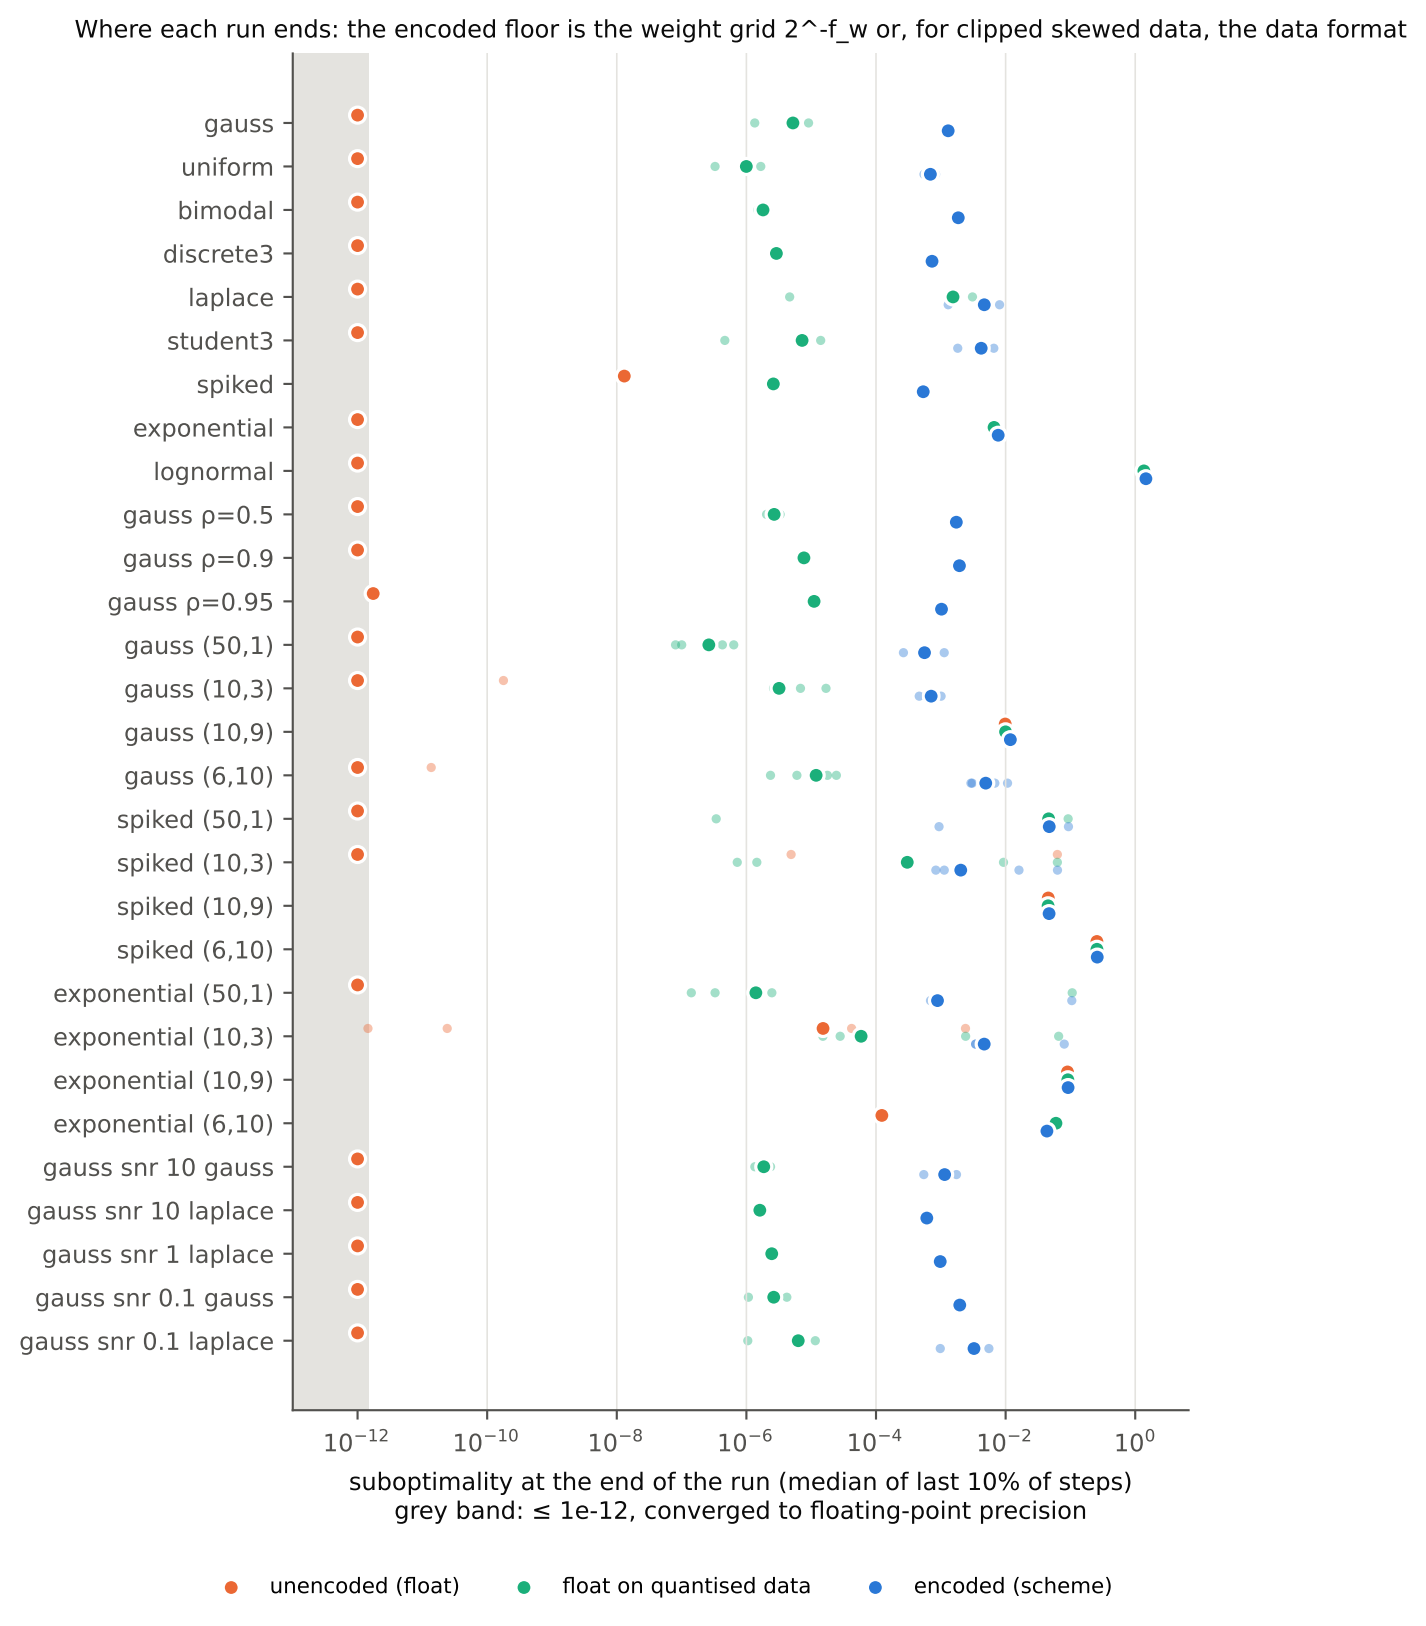

Where each run ends: the encoded floor is the weight grid 2^-f_w or, for clipped skewed data, the data format
gauss
uniform
bimodal
discrete3
laplace
student3
spiked
exponential
lognormal
gauss ρ=0.5
gauss ρ=0.9
gauss ρ=0.95
gauss (50,1)
gauss (10,3)
gauss (10,9)
gauss (6,10)
spiked (50,1)
spiked (10,3)
spiked (10,9)
spiked (6,10)
exponential (50,1)
exponential (10,3)
exponential (10,9)
exponential (6,10)
gauss snr 10 gauss
gauss snr 10 laplace
gauss snr 1 laplace
gauss snr 0.1 gauss
gauss snr 0.1 laplace
10^{-12}
10^{-10}
10^{-8}
10^{-6}
10^{-4}
10^{-2}
10^{0}
suboptimality at the end of the run (median of last 10% of steps)
grey band: ≤ 1e-12, converged to floating-point precision
unencoded (float)
float on quantised data
encoded (scheme)