


Spot on DOKS

How to run GPU Spot Instances in DigitalOcean Kubernetes


```
./launch.sh
```

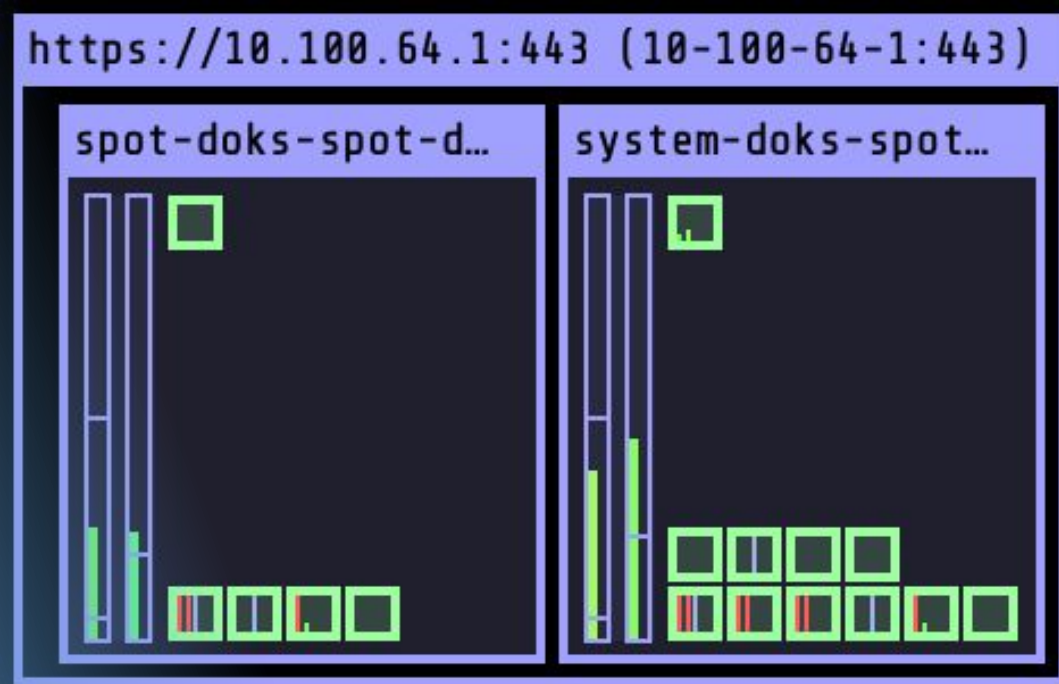

Our DOKS Cluster


- Five to ten minutes later...
- Two nodes are running
- On the right is our system node with kube-ops-view
- On the left is our Spot GPU worker and a handful of other processes

```
./simulate-interruption.sh
```

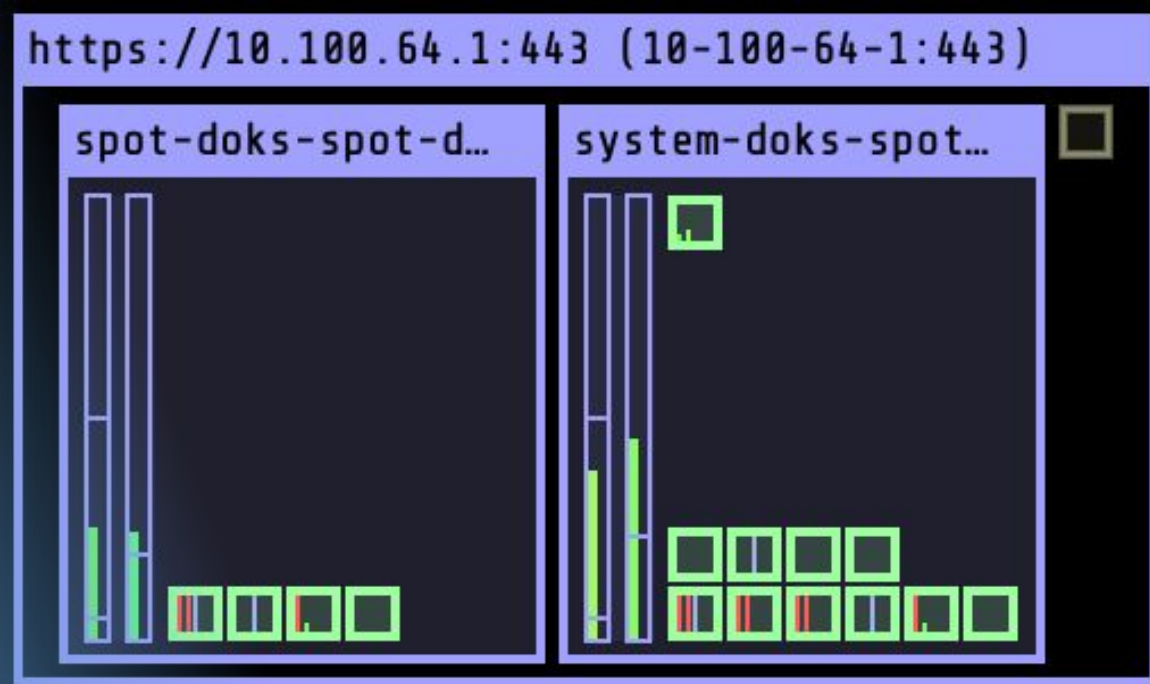


Spot Interruption

- DOKS has received an interruption notification for a Spot GPU node
- DOKS will delete the pool, but first...
- DOKS has cordoned the node on the left to prevent further launches
- DOKS is also draining that node of running processes

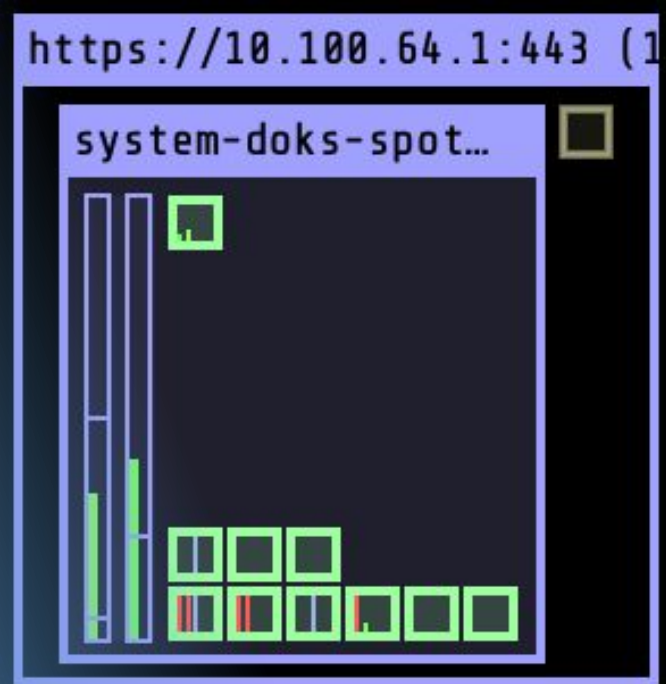


Node Reclaimed

- Spot GPU instances are reclaimed when needed and announced to the owners
- The warning allows DOKS to evacuate cleanly
- Our worker pod is waiting for a replacement for the interrupted Spot GPU node

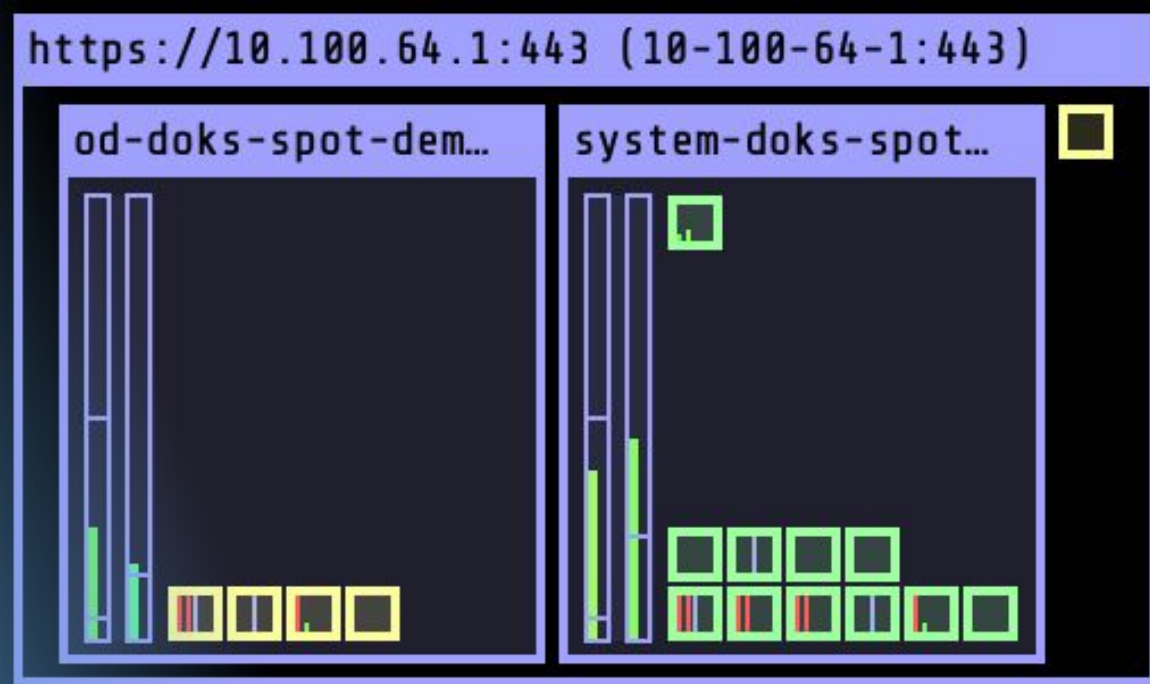

New GPU Node

- System processes and daemonsets come up first
- Worker(s) will follow
- The new GPU node is in the OD pool
- If desired, a new Spot GPU pool can be created

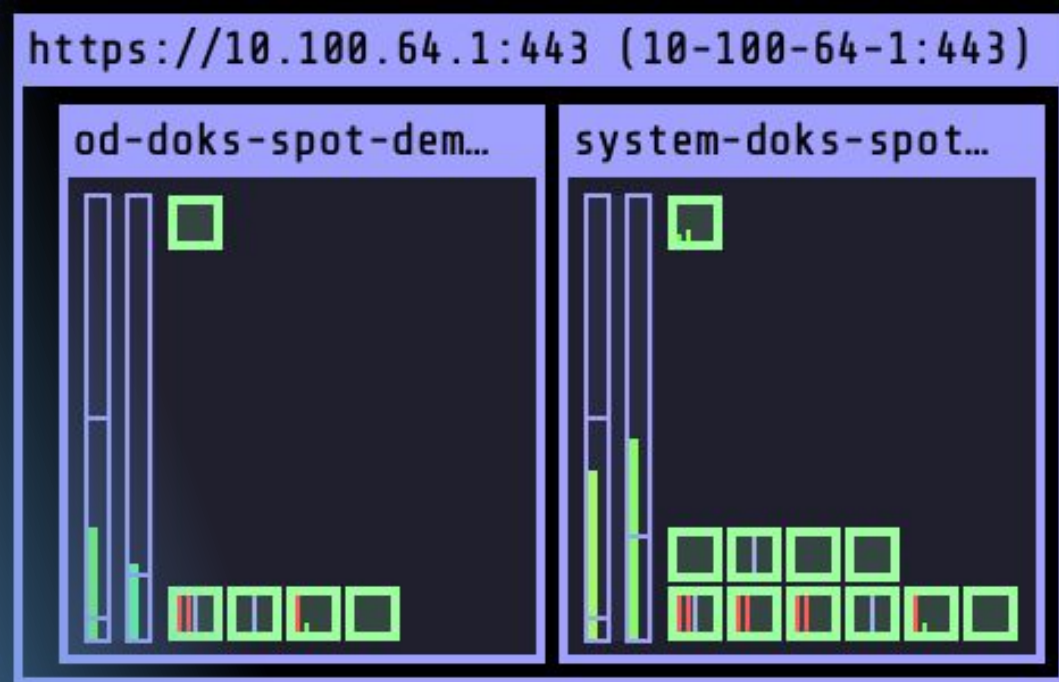

DOing Well Again

- System back to stable
- DOKS gracefully migrated work off of Spot GPU Droplets, onto On-Demand GPU Droplets, honoring disruption budgets


```
./teardown.sh
```