

Introduction to the EGRETci package

By Robert M. Hirsch and Laura A. De Cicco

March 6, 2015

Contents

1	Introduction to EGRET Confidence Intervals	2
2	EGRETci Workflow	5
3	Histograms.....	7
4	Confidence Bands	11

Figures

Figure 1	Concentration histogram	8
Figure 2	Flux histogram	9
Figure 3	Combo example	10
Figure 4	plotConcHistBoot	13
Figure 5	plotFluxHistBoot.....	14

Tables

Table 1	This table defines the contents of the eBoot list	3
Table 2	This table defines the contents of the caseSetUp data frame.....	4

1 Introduction to EGRET Confidence Intervals

This package EGRETci is an early test version of the package that will encompass the various approaches to uncertainty estimation associated with trend analysis for the EGRET package. The various functions included here are all discussed in the draft manuscript A bootstrap method for estimating uncertainty of water quality trends by Hirsch, Archfield, and De Cicco (draft version of March 5, 2015). The present version of the EGRETci package is designed for interactive use only, but later versions will describe how batch workflows can be created. Also, the current version can only do analysis of trends for water years, but later versions will allow it to evaluate any group of months (i.e. any 'Period of Analysis' to use the term in the EGRET package). The EGRETci package is designed to carry out three specific types of tasks.

- 1) Evaluate a trend over a specific span of years and produce a variety of tabular results. This is done with a short workflow involving four functions: trendSetUp, setPA, setForBoot, and wBT. The results come both in the form of a) console output, which shows the bootstrap replicate process as it is underway and provides text output of results, and b) a list of outputs called eBoot. The contents of eBoot are described below.
- 2) Prepare histograms of values for the trend magnitudes, expressed in percent, for Flow Normalized Concentration and Flow Normalized Flux. This is done with the function plotHistogramTrend. It depends on outputs contained in eBoot.
- 3) Create confidence bands around the computed trends in Flow Normalized Concentration and Flow Normalized Flux. This is done using a single interactive function called xxxxx and then, using the output from that function running two functions that produce the confidence band graphics for concentration and flux respectively (plotConcHistBoot, and plotFluxHistBoot).

Table 1. This table defines the contents of the eBoot list

Data Frame	Column	Definition
bootOut	rejectC	Reject H_0 , (no trend in concentration), TRUE or FALSE
	pValC	p-value for no trend in concentration
	estC	standard WRTDS estimate of change from starting year to ending year in mg/L
	lowC	Lower confidence limit (90%) on concentration trend
	upC	Upper confidence limit (90%) on concentration trend
	lowC50	Lower confidence limit (50%) on concentration trend
	upC50	Upper confidence limit (50%) on concentration trend
	lowC95	Lower confidence limit (95%) on concentration trend
	upC95	Upper confidence limit (95%) on concentration trend
	likeCUp	Likelihood that trend in concentration is upwards
	likeCDown	Likelihood that trend in concentration is downwards
	rejectF	Reject H_0 , (no trend in flux), TRUE or FALSE
	pValF	p-value for no trend in flux
	estF	standard WRTDS estimate of change from starting year to ending year, in 10^6 kg/yr
	lowF	Lower confidence limit (90%) on flux trend
	upF	Upper confidence limit (90%) on flux trend
	lowF50	Lower confidence limit (50%) on flux trend
	upF50	Upper confidence limit (50%) on flux trend
	lowF95	Lower confidence limit (95%) on flux trend
	upF95	Upper confidence limit (95%) on flux trend
	likeFUp	Likelihood that trend in flux is upwards
	likeFDown	Likelihood that trend in flux is downwards
	baseConc	The estimated mean flow-normalized concentration in starting year, in mg/L
	baseFlux	The estimated mean flow-normalized flux in starting year, in 10^6 kg/yr
	iBoot	The actual number of bootstrap replicates used
wordsOut		a vector of four character variables (self explanatory)
xConc		a vector of length iBoot, of the change in flow normalized concentration computed by each bootstrap replicate
xFlux		a vector of length iBoot, of the change in flow normalized flux computed by each bootstrap replicate (10^6 kg/yr)

There is also a data frame called `caseSetUp`, which contains a number of important parameters that define the way that the test was implemented. They are presented here.

Table 2. This table defines the contents of the `caseSetUp` data frame

Column	Definition
<code>year1</code>	the water year that is the start of the trend period (an integer)
<code>yearData1</code>	the water year that is the start of the data set (an integer)
<code>year2</code>	the water year that is the end of the trend period (an integer)
<code>yearData2</code>	the water year that is the end of the data set (an integer)
<code>numSamples</code>	number of samples in <code>eList\$Sample</code>
<code>nBoot</code>	maximum number of replicates (called <code>Mmax</code> in paper)
<code>bootBreak</code>	minimum number of replicates (called <code>Mmin</code> in paper)
<code>blockLength</code>	length of blocks for bootstrap (called <code>B</code> in the paper)
<code>confStop</code>	$1 - \alpha$, the width of the confidence interval used in adaptive stopping rule (default $\alpha=0.3$ so <code>confStop</code> =0.7)

2 EGRETci Workflow

```
library(EGRET)
library(EGRETci)
eList <- Choptank_eList

#Interactive function to set up trend analysis:
caseSetUp <- trendSetUp(eList)

#Non-interactive:
# caseSetUp <- data.frame(nBoot=100,
#                          bootBreak=39,
#                          blockLength=200,
#                          confStop=0.7,
#                          year1=1980,
#                          year2=2005,
#                          yearData1=1980,
#                          yearData2=2011,
#                          numSamples=606)

eList <- setPA(eList)
eList <- setForBoot(eList)

eBoot <- wBT(eList, caseSetUp,
             saveOutput = TRUE, fileName = "outputText.txt")

#Interactive save output function:
saveEGRETci(eList, eBoot)
```

The output in output.txt is:

Choptank River Inorganic nitrogen (nitrate and nitrite)

Bootstrap process, for change from Water Year 1985 to Water Year 2005
 data set runs from WaterYear 1980 to Water Year 2011
 Bootstrap block length in days 200
 bootBreak is 9 confStop is 0.7

WRTDS estimated concentration change is 0.328 mg/L
 WRTDS estimated flux change is 0.03148 10⁶ kg/yr
 value is bootstrap replicate result (deltack or deltafk in paper)
 nPos is cumulative number of positive trends
 post_p is posterior mean estimate of probability of a positive trend
 Lower and Upper are estimates of the 90\% CI values for magnitude of trend

rep	Concentration						Flux				
	value	nPos	post_p	Lower	Upper		value	nPos	post_p	Lower	Upper
1	0.267	1	0.75	0.267	0.267		0.02585	1	0.75	0.02585	0.02585
2	0.295	2	0.833	0.267	0.295		0.02635	2	0.833	0.02585	0.02635
3	0.318	3	0.875	0.267	0.318		0.03256	3	0.875	0.02585	0.03256
4	0.233	4	0.9	0.233	0.318		0.02718	4	0.9	0.02585	0.03256
5	0.373	5	0.917	0.233	0.373		0.03897	5	0.917	0.02585	0.03897
6	0.309	6	0.929	0.233	0.373		0.03404	6	0.929	0.02585	0.03897

7	0.354	7	0.938	0.233	0.373		0.03824	7	0.938	0.02585	0.03897
8	0.293	8	0.944	0.233	0.373		0.02632	8	0.944	0.02585	0.03897
9	0.415	9	0.95	0.233	0.415		0.04439	9	0.95	0.02585	0.04439
10	0.421	10	0.955	0.233	0.421		0.04115	10	0.955	0.02585	0.04439
11	0.374	11	0.958	0.233	0.421		0.03796	11	0.958	0.02585	0.04439
12	0.362	12	0.962	0.233	0.421		0.03708	12	0.962	0.02585	0.04439
13	0.309	13	0.964	0.233	0.421		0.03073	13	0.964	0.02585	0.04439
14	0.353	14	0.967	0.233	0.421		0.03364	14	0.967	0.02585	0.04439
15	0.18	15	0.969	0.18	0.421		0.01796	15	0.969	0.01796	0.04439
16	0.312	16	0.971	0.18	0.421		0.02388	16	0.971	0.01796	0.04439
17	0.401	17	0.972	0.18	0.421		0.04159	17	0.972	0.01796	0.04439
18	0.34	18	0.974	0.18	0.421		0.03359	18	0.974	0.01796	0.04439
19	0.285	19	0.975	0.18	0.421		0.03073	19	0.975	0.01796	0.04439
20	0.291	20	0.976	0.183	0.421		0.02888	20	0.976	0.01826	0.04425

Should we reject Ho that Flow Normalized Concentration Trend = 0 ? Reject Ho

best estimate is 0.328 mg/L

Lower and Upper 90\% CIs 0.183 0.421

also 95\% CIs 0.180 0.421

and 50\% CIs 0.292 0.370

approximate two-sided p-value for Conc 0.048

* Note p-value should be considered to be < stated value

Likelihood that Flow Normalized Concentration is trending up = 0.976 is trending down =

Should we reject Ho that Flow Normalized Flux Trend = 0 ? Reject Ho

best estimate is 0.03148 10⁶ kg/year

Lower and Upper 90\% CIs 0.0183 0.0442

also 95\% CIs 0.0180 0.0444

and 50\% CIs 0.0266 0.0382

approximate two-sided p-value for Flux 0.048

* Note p-value should be considered to be < stated value

Likelihood that Flow Normalized Flux is trending up = 0.976 is trending down= 0.0238

Upward trend in concentration is highly likely

Upward trend in flux is highly likely

Downward trend in concentration is highly unlikely

Downward trend in flux is highly unlikely

3 Histograms

```
library(EGRET)
library(EGRETci)
# Example data included in package:
eList <- Choptank_eList
eBoot <- Choptank_eBoot
caseSetUp <- Choptank_caseSetUp

#Concentration:
plotHistogramTrend(eBoot, caseSetUp, flux=FALSE, xSeq = seq(-20,60,5))

#Flux
plotHistogramTrend(eBoot, caseSetUp, flux=TRUE, xSeq = seq(-20,60,5))
```

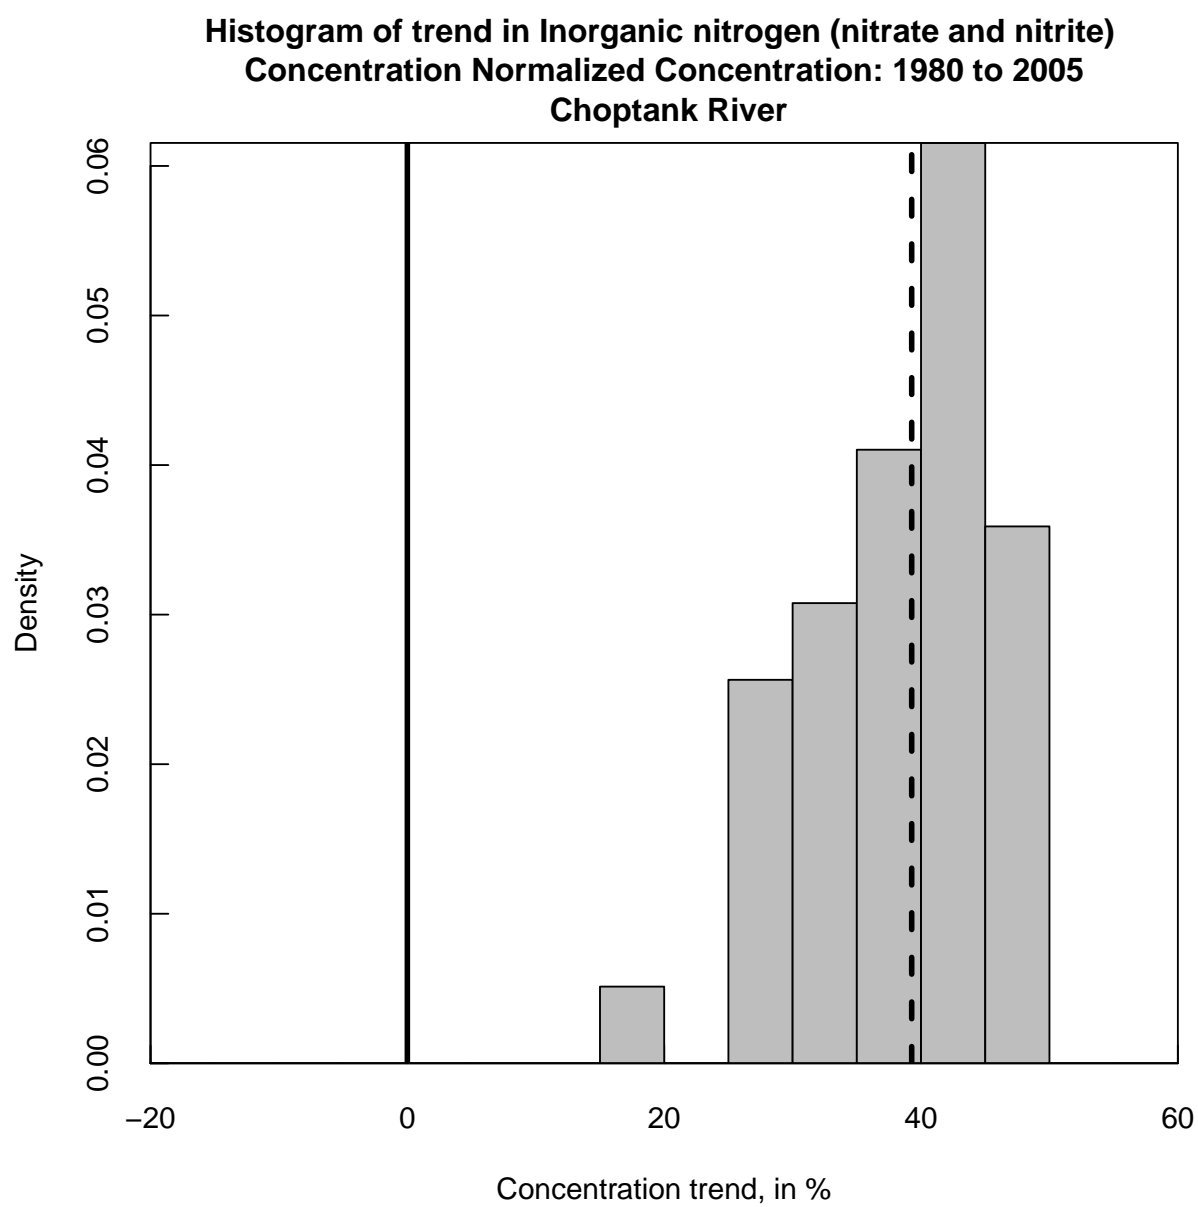


Figure 1. Concentration histogram

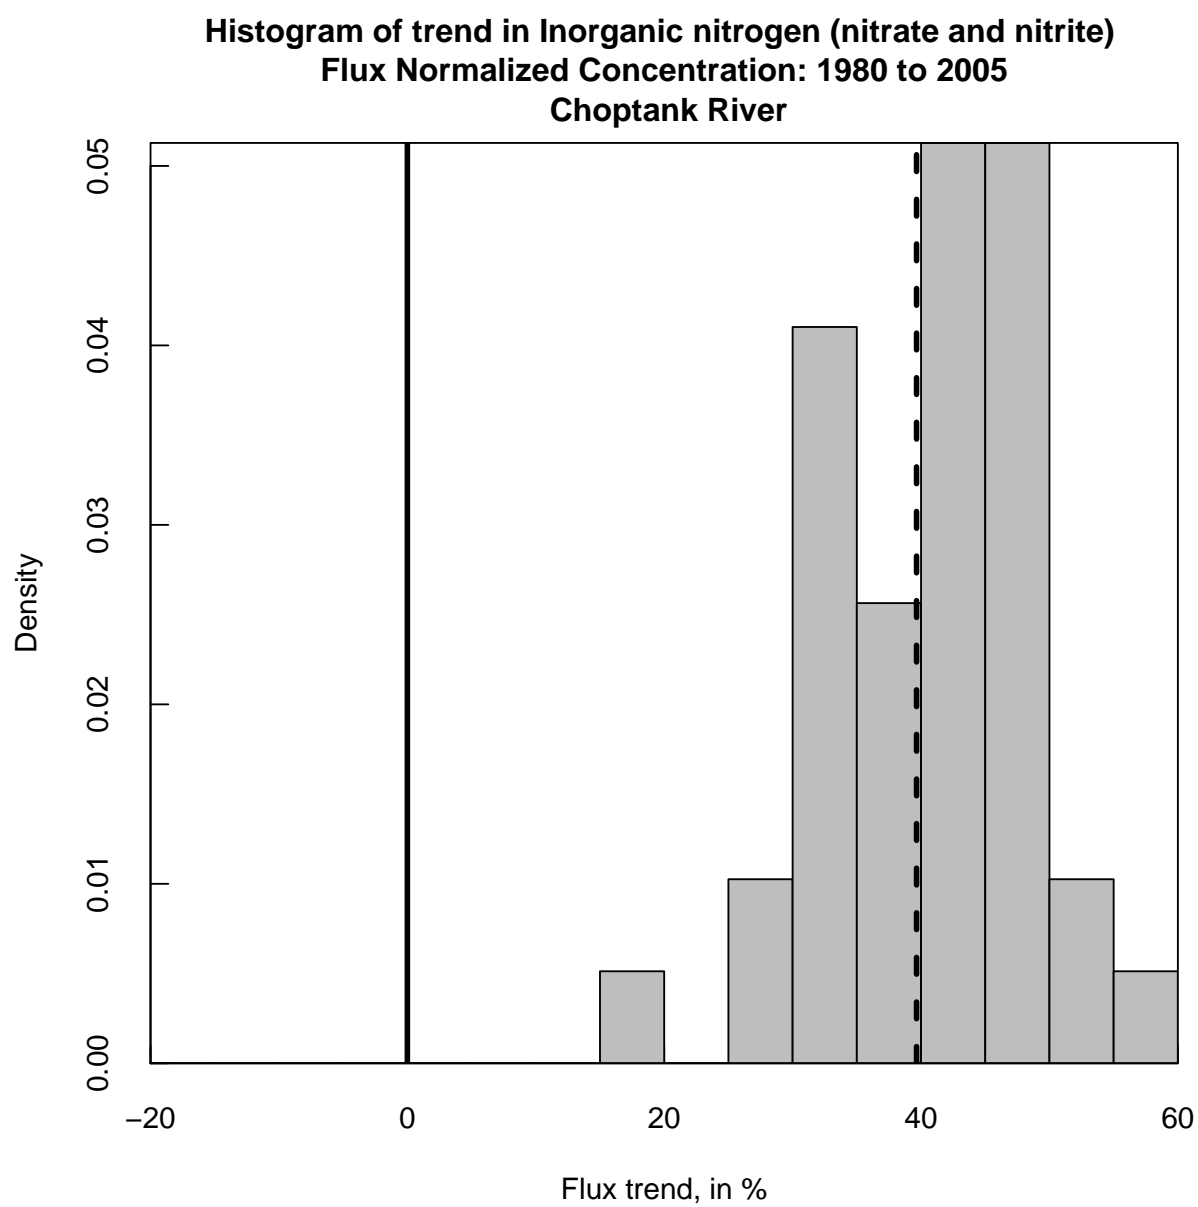


Figure 2. Flux histogram

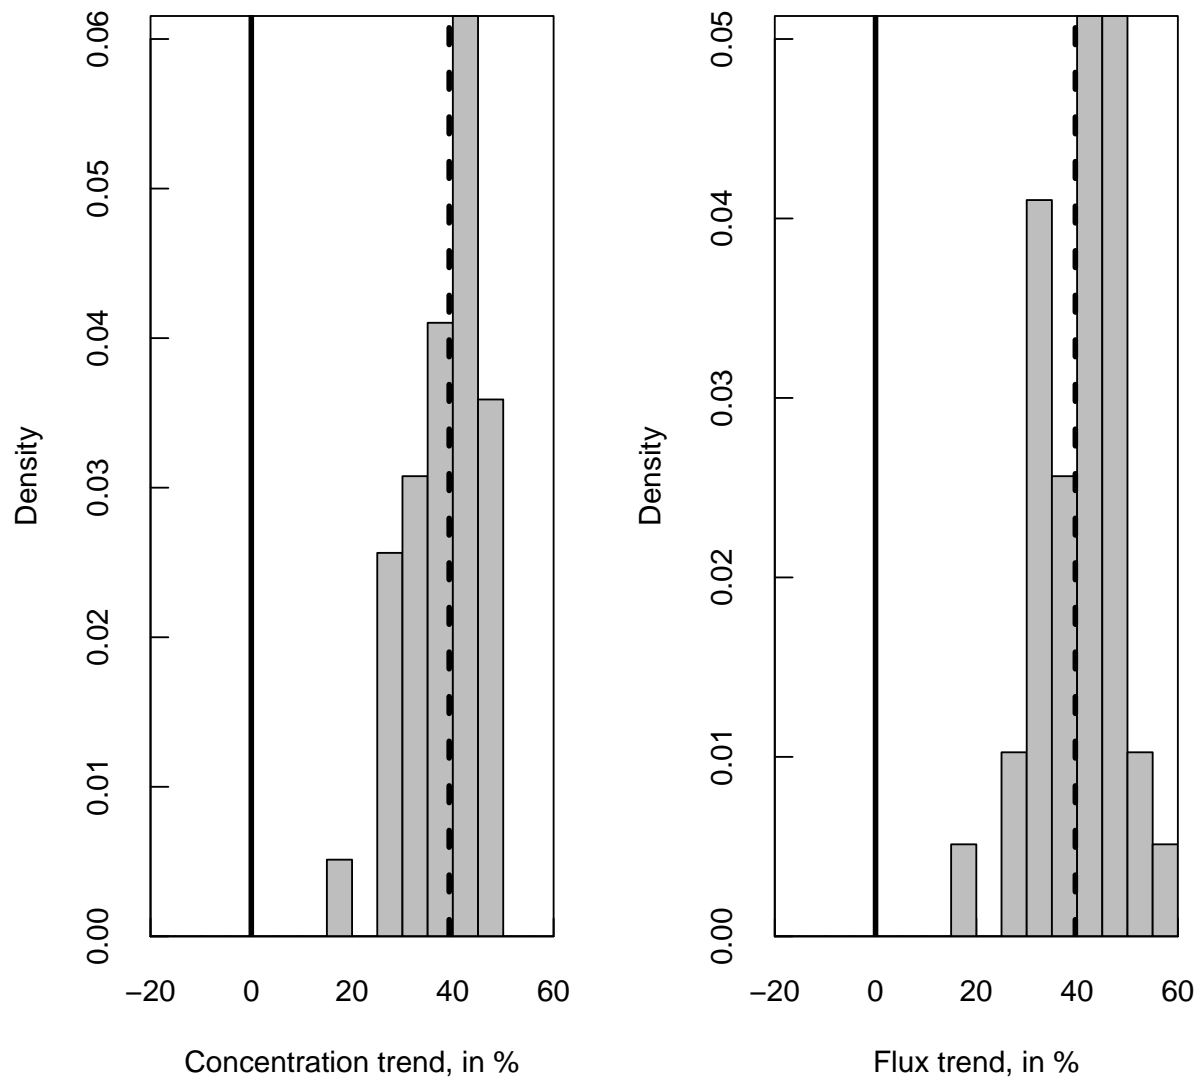


Figure 3. Combo example

Plot together:

```
par(mfrow=c(1,2))
plotHistogramTrend(eBoot, caseSetUp, flux=FALSE,
                   xSeq = seq(-20,60,5), printTitle=FALSE)
#Flux
plotHistogramTrend(eBoot, caseSetUp, flux=TRUE,
                   xSeq = seq(-20,60,5), printTitle=FALSE)
```

4 Confidence Bands

Base-R workflow for confidence bands on model results:

```
eList <- Choptank_eList

nBoot <- 100
blockLength <- 200

widthCI <- 90
ciLower <- (50-(widthCI/2))/100
ciUpper <- (50+(widthCI/2))/100
probs <- c(ciLower, ciUpper)

repAnnualResults <- vector(mode = "list", length = nBoot)
for(n in 1:nBoot){
  repAnnualResults[[n]] <- bootAnnual(eList, blockLength)
}

CIAnnualResults <- ciBands(eList, repAnnualResults, probs)
save(CIAnnualResults, file="CIAnnualResults.RData")
```

Taking advantage of the foreach package to do parallel computing:

```
library(foreach)
library(doParallel)
library(iterators)
library(EGRET)

eList <- Choptank_eList

nBoot <- 100
blockLength <- 200
coreOut <- 2 #Number of cores to leave out of processing tasks

widthCI <- 90
ciLower <- (50-(widthCI/2))/100
ciUpper <- (50+(widthCI/2))/100
probs <- c(ciLower, ciUpper)

nCores <- detectCores() - coreOut
cl <- makeCluster(nCores)
registerDoParallel(cl)
repAnnualResults <- foreach(n = 1:nBoot, .packages=c('EGRETci')) %dopar% {
  annualResults <- bootAnnual(eList, blockLength)
}
stopCluster(cl)

# save(repAnnualResults, file="repAnnualResults.RData")
```

```
CIAnnualResults <- ciBands(eList, repAnnualResults, probs)
save(CIAnnualResults, file="CIAnnualResults.RData")
```

The following concentration and flux plots can then be generated from the CIAnnualResults data.

```
#Load package data:
eList <- Choptank_eList
repAnnualResults <- repAnnualResults

CIAnnualResults <- ciBands(eList, repAnnualResults, probs=c(0.05,0.95))
plotConcHistBoot(eList, CIAnnualResults)

plotFluxHistBoot(eList, CIAnnualResults)
```

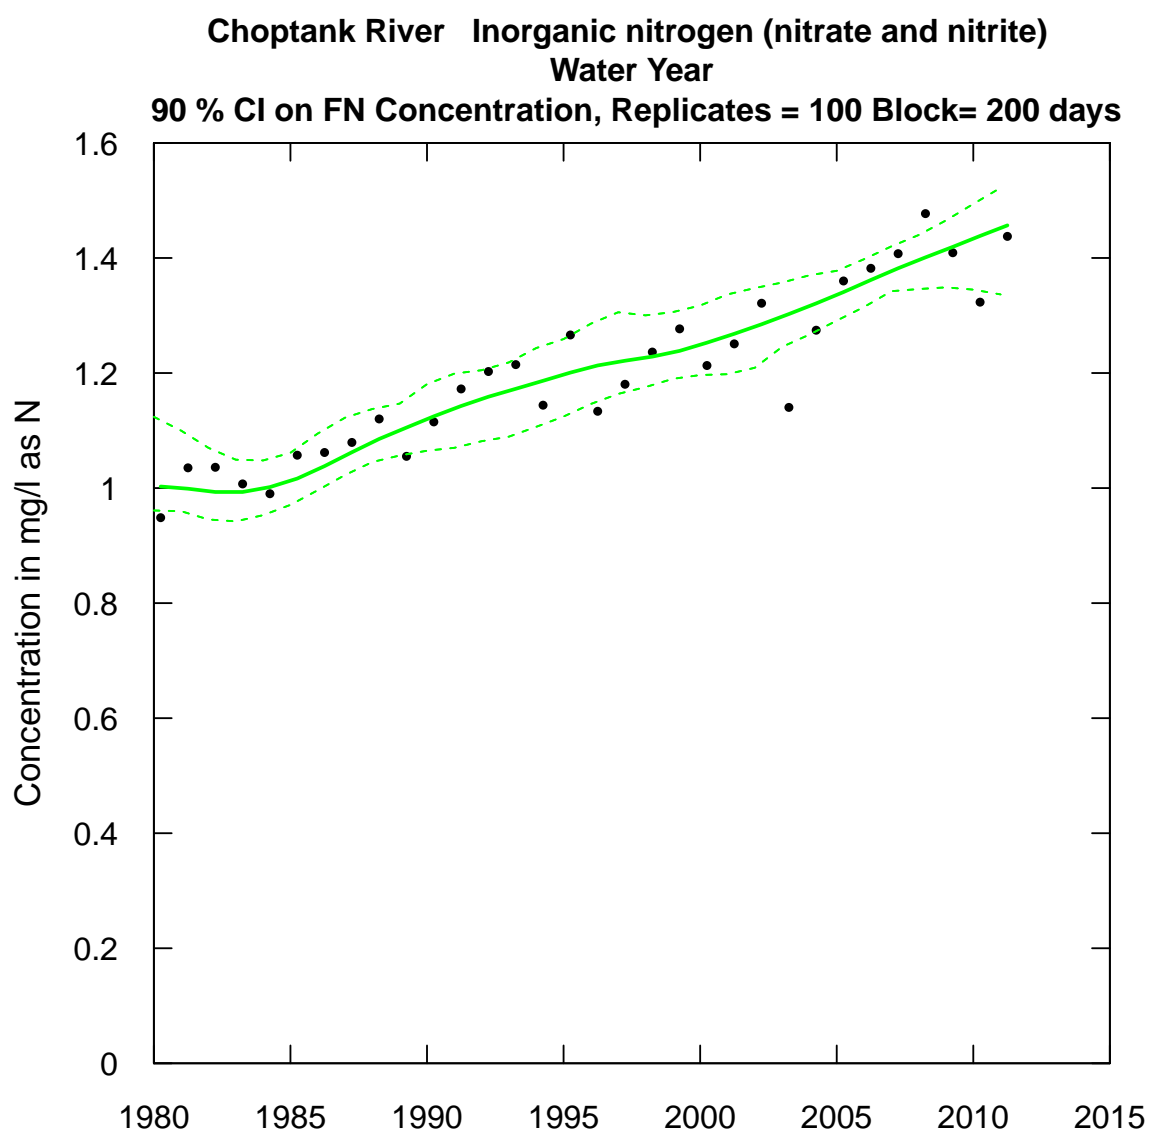


Figure 4. plotConcHistBoot

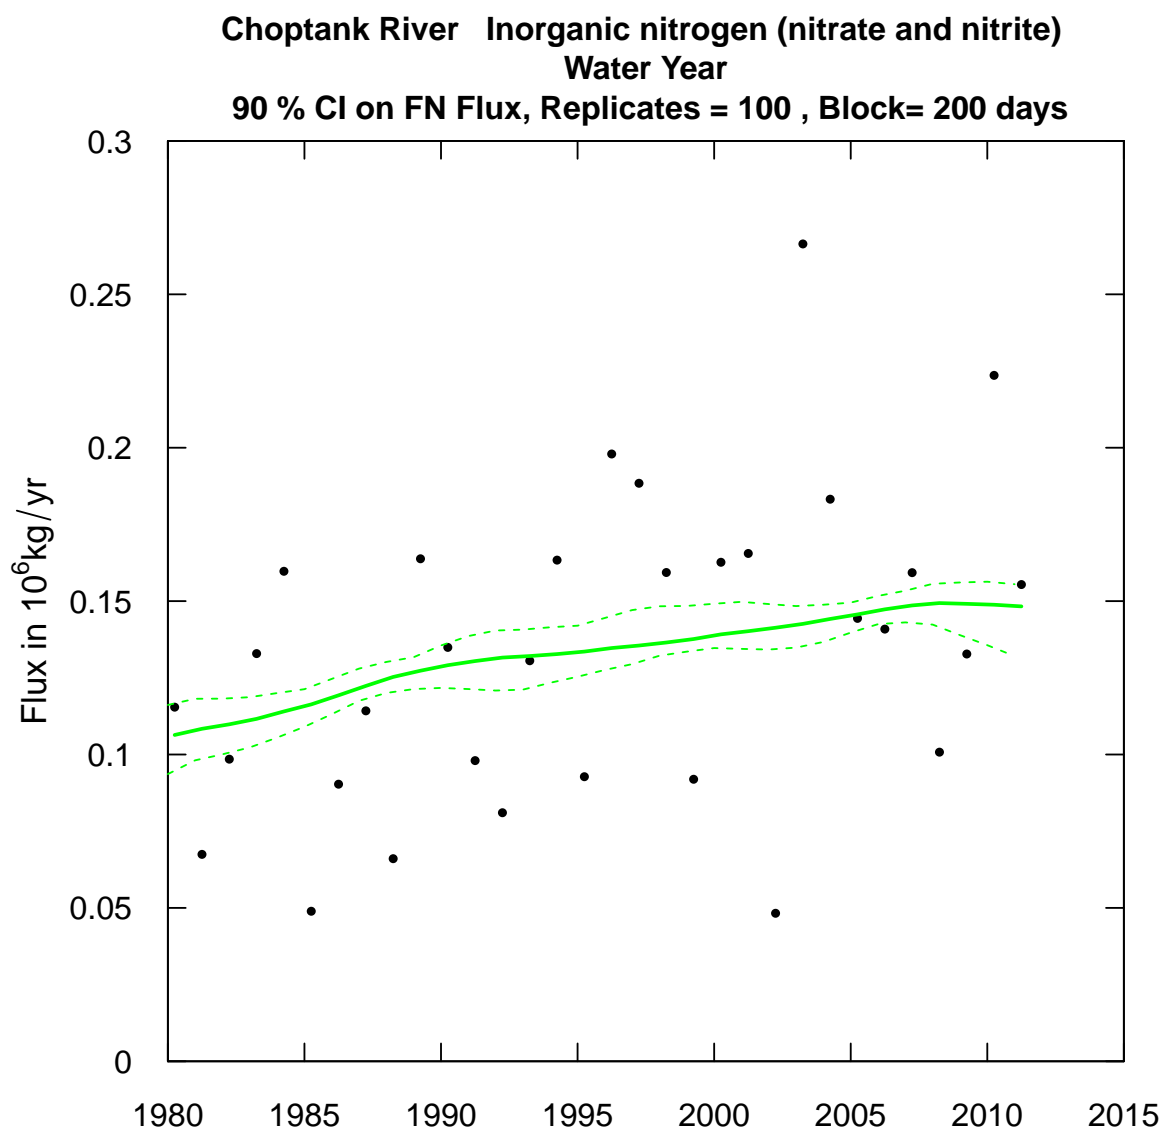


Figure 5. plotFluxHistBoot