

Primera parte

Creando el repositorio por terminal

```
DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents (master)
$ mkdir LAB01

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents (master)
$ cd
.git/          My Music/    My Videos/   desktop.ini
LAB01/         My Pictures/ README.md

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents (master)
$ cd LAB01/

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (master)
$ git add .
```

```
DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (master)
$ git commit -m "first commit"
[master d232393] first commit
Committer: unknown <david.baena-r@labinfo.is.escuelaing.edu.co>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly:

    git config --global user.name "Your Name"
    git config --global user.email you@example.com

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author


1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 LAB01/README.md

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (master)
$ git branch -M main
```

```
DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (main)
$ git remote add origin https://github.com/DSBAENAR/LAB01CVDS.git
```

```
DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (main)
$ git push -u origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 24 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (7/7), 704 bytes | 704.00 KiB/s, done.
Total 7 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/DSBAENAR/LAB01CVDS.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

Repositorio remoto

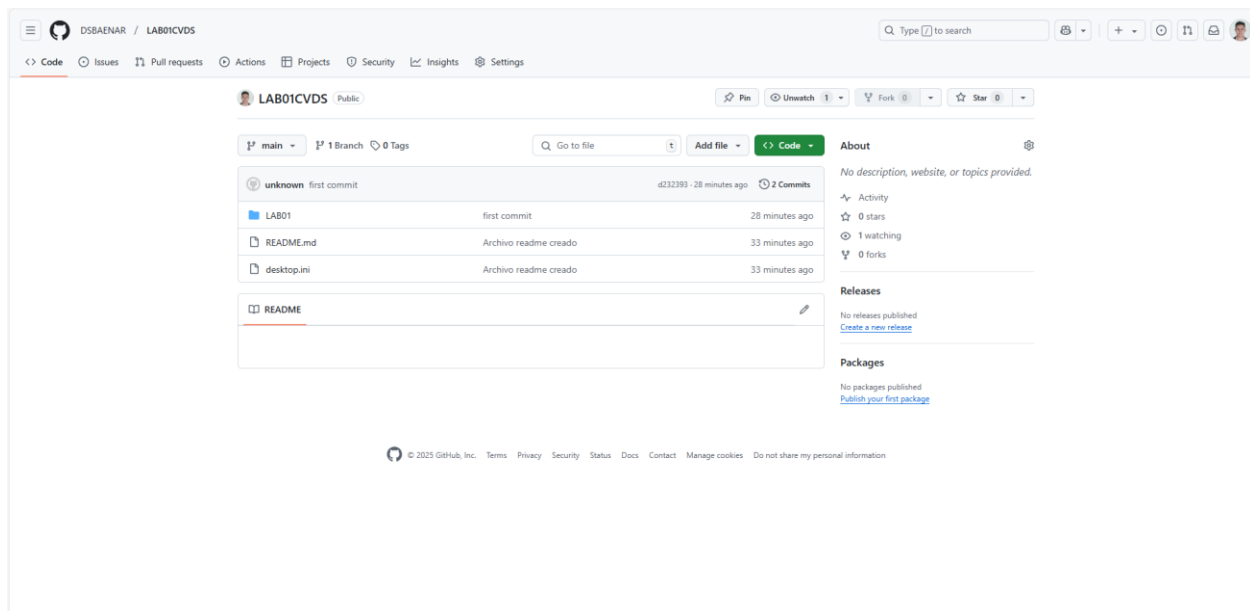

git add

Este comando se usa para añadir cambios (archivos modificados, nuevos archivos o archivos eliminados)

git commit

Una vez que se han añadido los cambios, el comando git commit se usa para guardar esos cambios en el historial de Git, creando un cambio con un mensaje que describe la modificación o eliminación realizada.

Repositorio

<https://github.com/DSBAENAR/LAB01CVDS.git>

Segunda parte (en Parejas)

1. Dando acceso a colaborador


Manage access

Add people


☐ Select all

Type ▾

☐



Juan Beltran
juan-beltran0518 • Collaborator



Conflictos owner y colaborador

```
DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (main)
$ git add .

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (main)
$ git commit -m "Conflicto 2"
[main e9b4b03] Conflicto 2
Committer: unknown <david.baena-r@labinfo.is.escuelaing.edu.co>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly:

    git config --global user.name "Your Name"
    git config --global user.email you@example.com

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+), 1 deletion(-)

DAVID.BAENA-R@sisistemas63 MINGW64 ~/Documents/LAB01 (main)
$ git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 24 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (4/4), 418 bytes | 418.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/DSBAENAR/LAB01CVDS.git
   f51ef53..e9b4b03  main -> main
```

Cuando hicimos cambios al mismo tiempo en el archivo README en mi repositorio no falló debido a que hice los cambios primero.