

Crimes on Oregon College Campuses

Roy G. Biv, Ed Grimley, *Member, IEEE*, and Martha Stewart



Fig. 1. In the Clouds: Vancouver from Cypress Mountain. Note that the teaser may not be wider than the abstract block.

Abstract—Insert Abstract

Index Terms—Insert on line 104 of tex file

1 INTRODUCTION

Safety of students in a university is of utmost importance. The crime rate in an around the university plays a vital role in choosing a school. With this project we intend to help young students and parents make well informed decisions. The motivation behind this visualization is also to help universities to improve security and also to provide students with the required counseling. The Department of Education released this data set which contains the information of campus arrests and crimes in the years 2013, 2014, 2015.

The website allows the users to compare universities. However, there is no visualization which portrays the dataset. The problem that this paper addresses is how this dataset can be visualized providing meaningful insight. The dataset has different categories which makes it harder to visualize. The aim of this visualization is to map all the universities which have recorded crimes committed on campus onto the map of the United States of America, and then show the different crime committed in the form histograms.

As the dataset is huge and handling such a vast dataset may result in complications while visualizing, we have decided to first make a prototype with all the universities and colleges in the state of Oregon. The next step is to then include all the universities and colleges in the country. The visualization is a good way to represent this data set as it makes it easier for the intended audience to understand the data better. The following sections show the work flow behind the implementation of this visualization.

2 LITERARY RESEARCH AND REFERENCES

The data for crimes committed on campuses in the United States has been required by the Clery Act law to be sent to the government each year. However, this raw data is of little help to future students and parents as long reports of just numbers are hard to read and hard to find [5]. A web based visualization will enable future students to easily find the crime data without sorting through dense reports.

A study in 2012 showed that students were afraid of crime maps as it made crimes seem more prevalent than they actually were [2]. For our visualization, the same base numbers are used for each University so each University can be easily compared to one another. The only downside to this method is that the size of the University is not taken into account which may make smaller Universities disproportionately safer.

Another problem with our data is that it includes some crimes committed off-campus. The problem with this is that locations not on campus can contribute to the crime stats without being actually school related. A report shows the Casinos near campus can cause spikes in certain crimes. Robberies and vehicle thefts are increased, but burglaries are lower [4]. However, for our needs this does not change the base crime statistics.

Other problems with our visualization is that it only shows successful crimes that are reported. Universities have several methods in place to alleviate crime and make their campuses safer [3]. Emergency phones and well lit walkways are just some of the infrastructure in place to counter crime. In our data, only the resulting crime is reported.

3 METHOD AND IMPLEMENTATION

For this visualization, we created a webpage [?] that implements the d3.js v4 package to gather data and present a graphic representation. We had a public dataset [?] with campus crime data from 2013, 2014, and 2015 for colleges all over the united states. From that data, we

-
- Roy G. Biv is with Starbucks Research. E-mail: roy.g.biv@aol.com.
 - Ed Grimley is with Grimley Widgets, Inc.. E-mail: ed.grimley@aol.com.
 - Martha Stewart is with Martha Stewart Enterprises at Microsoft Research. E-mail: martha.stewart@marthastewart.com.

selected rows pertaining to Oregon colleges (specifically Oregon State University, University of Oregon, and Portland State University) and loaded them as a .csv file into the d3 JavaScript of our webpage. Our visualization creates a dynamic bar chart that changes according to the different filters applied.

Our group researched several different visualization techniques in the previous section (Literary Research and References) including pie charts, bubble maps, and heap maps that were used to display data. We analyzed the reasoning behind each technique and began to consider what we really want to convey with our visualization. Some visualizations aimed to display proportionalities between geographical areas or data categories. Some visualizations wanted to show concentrations of data for specific regions with heap maps. In our case, we wanted explicit numbers for specific comparisons.

Our visualization presents college campus crime data as three main comparisons:

1. Liquor, weapon, and drug crimes for the years 2013-2015 for a specific school.
2. A comparison of each crime type for each year (i.e. weapons crimes of 2013, 2014, and 2015).
3. And then a comparison of all school's crimes for a given crime type (All Oregon State weapon crimes vs. all University of Oregon weapon crimes vs. all Portland State Weapon Crimes).

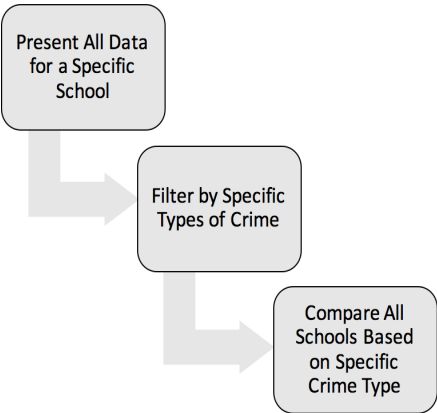


Fig. 2. Overview Diagram of Visualization Model

We use a simple button group that dynamically changes the d3 svg object according to the desired filter. We accomplish this by updating the dataset given to the d3 axes and bar objects each time a new filter event is activated.

3.1 One School, All Data

Our visualization begins by selecting a school and displaying crime data for weapon crimes, drug crimes, and liquor crimes by year. By clicking on a school node, the webpage calls a JavaScript function buildChart() and passes in a string parameter for the desired college. This function then parses the .csv file and creates arrays for each crime type and year based on college. We used d3.js functions such as nest() and rollup() to combine all data rows for the same college and add the values for each crime category [1]. It then creates a dataset by selecting only data from each array pertaining to the college supplied by the function parameter. Using this dataset, the function appends rectangle objects and axes to the svg element in the HTML of the webpage, and populates each obbject with the corresponding values. This creates a bar graph separated by crime type and year for the specified school. Clicking a different college node on the map will remove all previous rectangles and axes, repopulate the dataset with the corresponding college's data, and rebuild the bar graph.

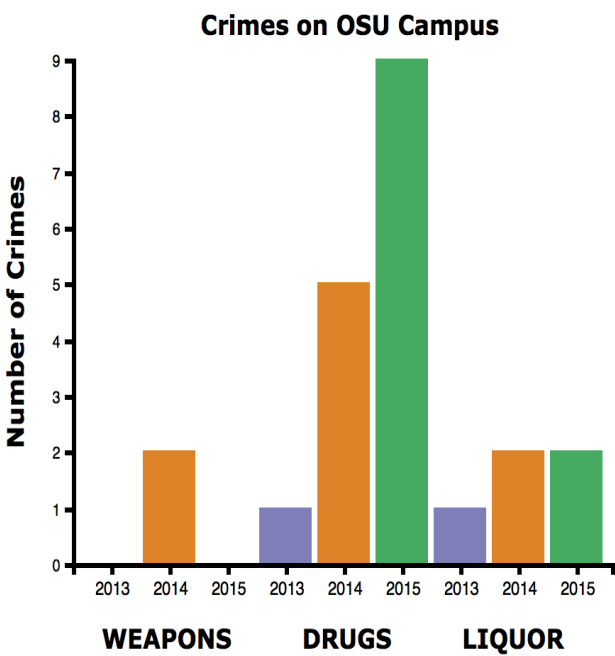


Fig. 3. A bar graph of all crimes for Oregon State University organized by crime type and year.

4 CONCLUSION

Insert Conclusion.

ACKNOWLEDGMENTS

The authors wish to thank A, B, C. This work was supported in part by a grant from XYZ.

REFERENCES

[1] M. Bostock. Data-driven documents, 2015.

[2] S. Fuhrmann, N. T. Huynh, and R. Scholz. *Comparing Fear of Crime and Crime Statistics on a University Campus*, vol. 8 of *Geotechnologies and the Environment*, pp. 319–337. Springer Science & Business Media, 2013.

[3] L. S. Hites, M. Fifolt, H. Beck, W. Su, S. Kerbawy, J. Wakelee, and A. Nas-sel. A geospatial mixed methods approach to assessing campus safety. *Evaluation Review*, 37(5):347–369, 2013. PMID: 24379450. doi: 10.1177/0193841X13509815

[4] T. Hyclak. Casinos and campus crime. *Economics Letters*, 112(1):31–33, 2011. doi: 10.1109/2945.468400

[5] S. Lipka. In campus-crime reports, there's little safety in the numbers. *Research paper: In Campus-Crime Reports, There's Little Safety in the Numbers*, 112(1), 2011.