



NAME -	DURGESH SUTHAR
EN. NO.	2202031000026
SUBJECT	OJT PRACTICALS (INTERNSHIP - II)
COURSE	B.TECH(IT)

OJT PRACTICAL

PRACTICAL-1

AIM :- Write a C program to print the address of a variable using a pointer.

CODE :-

```
#include
<stdio.h>

int main()
{
    int num;
    int *ptr = &num;

    printf("Enter The Number: \n");
    scanf("%d",&num);
    printf("Address of Number Variable: %p", ptr);

    return 0;
}
```

OUTPUT :- Enter The Number:

12

Address of Number Variable: 000000000062FE14

PRACTICAL-2

AIM :- Write a C program to create a Calculator using a pointer.

CODE :-

```
#include <stdio.h>
```

```
int main() {  
    float  
    num1, num2,  
    result; char  
    op; float *ptr1 =  
    &num1; float  
    *ptr2 = &num2;  
    printf("Enter the  
    first number: ");  
    scanf("%f",  
    ptr1);
```

```
    printf("Enter the operator (+, -, *,  
    /): "); scanf(" %c", &op);
```

```
    printf("Enter the second number:  
    "); scanf("%f", ptr2);
```

```
    switch(op)  
{ case '+':  
    result = *ptr1 +  
    *ptr2; break;
```

```
        case '-':  
    result = *ptr1  
    -  
    *ptr2; break;
```

```
        case '*':  
    result = *ptr1  
    *  
    *ptr2; break;
```

```
        case '/':
result = *ptr1
/
*ptr2;      break;

        default:
printf("Invalid operator");
return 1;

    }

    printf("%.2f %c %.2f = %.2f", *ptr1, op, *ptr2, result);

    return 0;
}
```

OUTPUT:-

```
Enter the first number: 12
Enter the operator (+, -, *, /):
* Enter the second number:
12 12.00 * 12.00 = 144.00
```

PRACTICAL-3

AIM :- Write a C program to swap the two values using call by value and call by reference.

CODE :-

```
#include <stdio.h>

void swap_value(int x, int y)
{
    int
temp
= x;
x = y;
y =
temp;
```

```
}
```

```
void swap_reference(int *x, int *y)
```

```
{
```

```
    int temp
```

```
    = *x;    *x
```

```
    = *y;
```

```
    *y = temp;
```

```
}
```

```
int main()
```

```
{
```

```
    int num1, num2;
```

```
    printf("Enter the Number:
```

```
    \n"); scanf("%d",&num1);
```

```
    scanf("%d",&num2);
```

```
    printf("\nBefore swapping using call by value: num1 = %d, num2 =  
    %d\n", num1, num2);
```

```
    swap_value(num1, num2);  
    printf("After swapping using call by value: num1 = %d,  
    num2 = %d\n\n", num1, num2);
```

```
    printf("Before swapping using call by reference: num1 = %d, num2 =  
    %d\n", num1, num2);  
    swap_reference(&num1,  
    &num2);  
    printf("After swapping using call by reference: num1 = %d,  
    num2 = %d\n", num1, num2);
```

```
    return 0;
```

```
}
```

OUTPUT :-

Enter

the

Number:

12

23

Before swapping using call by value: num1 = 12,
num2 = 23 After swapping using call by value: num1 =
12, num2 = 23

Before swapping using call by reference: num1 = 12,
num2 = 23 After swapping using call by reference: num1
= 23, num2 = 12

PRACTICAL-4

AIM :- Define a structure type struct personal that would contain person name, Date of birth and age using this structure to read this information of 4 people and display the same.

CODE :-

```
#include <stdio.h>
```

```
struct personal
```

```
{  
    char  
    name[50]  
; int  
    birth_yea  
r; int  
    birth_mo  
nth; int  
    birth_day  
; int age;  
};
```

```
int main() {
```

```
    struct personal p[4];
```

```
    for (int i=0;i<4;i++)
```

```
{
```

```
printf("Enter details for person
%d:\n", i+1);      printf("Name: ");
scanf("%s", p[i].name);
printf("Date of Birth (YYYY-MM-DD): ");

scanf("%d-%d-%d", &p[i].birth_year, &p[i].birth_month,
&p[i].birth_day);  printf("Age: ");  scanf("%d",
&p[i].age);

printf("\n");
}

printf("Information of 4
people:\n"); for (int i=0;i<4;i++)
{
printf("Person %d\n", i+1);
printf("Name: %s\n",
p[i].name);

printf("Date of Birth: %d-%d-%d\n", p[i].birth_year, p[i].birth_month,
p[i].birth_day); printf("Age: %d\n", p[i].age);

printf("\n");
}

return 0;
}
```

OUTPUT :-

Enter details for person 1:

Name: yash

Date of Birth (YYYY-MM-DD): 10-09-2005

Age: 18

Enter details for person 2:

Name: rutu

Date of Birth (YYYY-MM-DD): 02-08-1999

Age: 24

Enter details for person 3:

Name: Guddu

Date of Birth (YYYY-MM-DD): 02-09-2005

Age: 18

Enter details for person 4:

Name: Aditya

Date of Birth (YYYY-MM-DD): 20-04-2006

Age: 19

Information of 4

people: Person 1

Name: Deepak

Date of Birth: 10-9-

2005 Age: 20

Person 2

Name:

Abhisek

Date of Birth: 2-8-

1999 Age: 24

Person 3

Name:

Rahul

Date of Birth: 2-9-

2005 Age: 18

Person 4

Name:

Mnish

Date of Birth: 20-4-

2006 Age: 17

PRACTICAL-5

AIM :- Write a C program to calculate the sum of n numbers entered by the user using dynamic memory allocation

CODE :-

```
#include
<stdio.h>
#include
<stdlib.h>

int main()
{
    i
    n
    t
    n
    ;

    printf("Enter the number of elements:
"); scanf("%d", &n);

    int *arr = (int *) malloc(n *

    sizeof(int)); printf("Enter %d

    integers:\n", n);
    for (int i = 0; i < n; i++)
    {
        scanf("%d", &arr[i]);
    }

    int sum = 0;
    for (int i = 0; i < n; i++)
    {
        sum += arr[i];
    }
```

```
printf("Sum of %d integers is %d\n", n,  
sum); free(arr);
```

```
return 0;  
}
```

OUTPUT :-

Enter the number of
elements: 2 Enter 2
integers:

12

23

Sum of 2 integers is 35

PRACTICAL-6

AIM :- A file named "New" contains a series of integer numbers. Write a c program to read all numbers from a file and then copy all odd numbers into a file named "odd" and write all even numbers into a file named "even". Then display the values of files odd and even on the screen

CODE :-

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
FILE *fp1, *fp2,  
*fp3; int num;
```

```
fp1 = fopen("6 New.txt",
```

```
"r"); if (fp1 == NULL)
```

```
{
```

```
printf("Error: Unable to open  
the file.\n"); return 1;
```

```
}
```

```
fp2 = fopen("6 odd.txt", "w");
```

```
if (fp2 == NULL) {  
    printf("Error: Unable to open  
the file.\n"); return 1;  
}  
  
fp3 = fopen("6 even.txt",  
  
"w"); if (fp3 == NULL)  
{  
    printf("Error: Unable to open  
the file.\n"); return 1;  
}  
  
while (fscanf(fp1, "%d", &num) != EOF)  
{  
    if (num % 2 == 0)  
    {  
        fprintf(fp3, "%d\n", num);  
    }  
else  
    {  
        fprintf(fp2, "%d\n", num);  
    }  
}  
  
fclose(fp1)  
; fclose(fp2);  
fclose(fp3);
```

```
printf("Odd numbers in  
the file:\n"); fp2 = fopen("6  
odd.txt", "r");  
  
while (fscanf(fp2, "%d", &num) != EOF)  
{  
    printf("%d\n", num);  
}  
fclose(fp2);  
  
printf("Even numbers in  
the file:\n");    fp3 =  
fopen("6 even.txt", "r");  
    while  
(fscanf(fp3, "%d", &num) != EOF)  
{  
    printf("%d\n", num);  
}  
fclose(fp3);  
  
return 0;  
}
```

OUTPUT:-

Odd numbers in the
file:

33

35

Even numbers in the
file:

12

12

34

56

44

PRACTICAL-7

AIM :- Write a C++ program to Check if the number is prime or not using a function.

CODE :-

```
#include
<iostream>
using
namespace
std; bool
Prime(int num)
{
    if(num<=1
        )
        {
            return false;
        }
    for (int i=2;i<=num/2;i++)
        {
            if (num%i==0)
                {
                    return false;
                }
        }
    return true;
}

int main()
{
    int num;
    cout<<"Enter
a
```

```
number: ";
    cin>
> num;

if(Prime(num))
{
    cout<<num<<" is a prime number."<<endl;

}
else
{
    cout<<num<<" is not a prime number."<< endl;
}
return 0;
}
```

OUTPUT :-

Enter a
number: 34 34
is not a prime
number.

Enter a
number: 13
13 is a
prime
number.

PRACTICAL-8

AIM :- Write a C++ program that prompts the user to enter a letter and check whether a letter is a vowel or constant.

CODE :-

```
#include
<iostream> using
namespace std;

int main()
{
    char letter;  cout<<"Enter a letter: "; cin>>letter;
    if(letter=='a' || letter=='e' || letter=='i' || letter=='o' ||
    letter=='u'    || letter=='A' || letter=='E' || letter=='I' ||
    letter=='O' || letter=='U')
    {
        cout<<letter<<" is a vowel."<<endl;
    }
    else
    {
        cout<<letter<<" is a consonant."<<endl;
    }
    return 0;
}
```

OUTPUT :-

Enter a
letter:
a a is a
vowel.

Enter a
letter: c
c is a
conson
a nt.

PRACTICAL-9

AIM :- Write a C++ program to demonstrate the concept of constructor and destructor.

CODE :-

```
#include
<iostream> using
namespace std;

class MyClass
{
public:
MyClass
s ()
{
    cout<<"Constructor called."<<endl;
}

~MyClass()
{
    cout<<"Destructor called."<<endl;
}
};

int main()
{
    MyClass
    obj; return
    0;
}
```

CODE :-

Constructor
called.

Destructor
called.

PRACTICAL-10

AIM :- Create a class student that stores roll_no, name. Create a class test that stores marks obtained in five subjects. Class result derived from student and test contains the total marks and percentage obtained in test. Input and display information of a student.

CODE :-

```
#include<iostream>
#include<string>
using namespace std;

class Student
{ public:
    int roll_no;
    string name;
};

class Test{
public:
    :
    int subject_marks[5];

    int total_marks(){
int total = 0;        for(int
i=0; i<5; i++){
total += subject_marks[i];
    }
    return total;
}

    double percentage(){
        return (total_marks() / 5.0);
    }
}
```

```
}  
};  
  
class Result : public Student,  
public Test{ public:  
    Result(int roll_no, string name, int  
        marks[]){ this->roll_no =  
roll_no;      this->name  
= name;      for(int  
i=0; i<5; i++){  
subject_marks[i] = marks[i];  
        }  
    }  
};  
  
int main(){ int marks[] =  
{80, 90, 85, 75, 95};  
    Result r(1, "John Doe", marks);  
  
    cout << "Roll No: " << r.roll_no  
<< endl;      cout << "Name: "  
<< r.name  
<< endl;  
  
    cout <<  
"Marks: ";  
    for(int i=0;  
i<5; i++){  
        cout << r.subject_marks[i] << " ";  
    }  
  
    cout << endl; cout << "Total Marks: "  
<< r.total_marks() << endl;  
  
    cout << "Percentage: " << r.percentage() << endl;  
  
    return 0;  
}
```

OUTPUT :-

Roll No: 1

Name: John Doe

Marks: 80 90 85 75

95

Total Marks: 425

Percentage: 85

PRACTICAL-11

AIM :- Write a C++ program to overload binary + operator.

CODE :-

```
#include
<iostream>

using namespace std;

class MyClass
{
private
:   int
value;
public
:
MyClass
s s(int
v)

    {
value = v;
}

MyClass operator+(const MyClass& other) const
{
int result = value +
other.value; return
MyClass(result);
}

int getValue() const
```

Internship-II(1010043192)

```
{
    return value;
}

};

int main()
{
    int x,y;
    cout<<"Enter the value: ";

    cin>>x
    ;
    cin>>y
    ;

    MyClass
    a(x);
    MyClass
    b(y);

    MyClass c=a+b;

    cout<<"a = "<<a.getValue()<<
endl; cout<<"b =
"<<b.getValue()<<endl;
    cout<<"c = a + b = "<<c.getValue()<< endl;

    return 0;
}
```

OUTPUT :-

```
Enter the
value: 23
32 a = 23

b = 32 c
= a + b =
55
```

PRACTICAL-12

AIM :- Create a base class called 'SHAPE' having two data members of type double, member function get_data() to initialize base class data members, pure virtual member function display_area() to compute and display the area of the geometrical object. Derive two specific classes 'TRIANGLE' and 'RECTANGLE' from the base class. Using these three classes design a program that will accept dimension of a triangle / rectangle interactively and display the area.

CODE :-

```
#include
<iostream> using
namespace std;

class Shape
{
public:
virtual void
draw()
{
    cout<<"Drawing a shape"<<endl;
}
};

class Circle:public Shape
{
public:
void
draw()
{
    cout<<"Drawing a circle"<<endl;
}
};

class Rectangle:public Shape
```

```
{  
publ  
ic:  
void  
dra  
w()  
  
    {  
        cout<<"Drawing a rectangle"<<endl;  
    }  
};  
  
int main()  
{  
    Shape* s = new Shape();  
    Shape* c = new Circle();  
    Shape* r = new  
    Rectangle();  
  
    s->draw();  
c->draw();  
r-  
>draw();  
return 0;  
}
```

OUTPUT :-

Drawing a shape
Drawing a circle
Drawing a
rectangle

PRACTICAL-13

AIM :- To study DDL-create and DML-insert commands.

DDL (Data Definition Language) and DML (Data Manipulation Language) are two different types of SQL (Structured Query Language) commands used to manage and manipulate databases.

DDL commands are used to define and manipulate the structure of the database, including creating tables, altering tables, adding columns, and deleting tables.

DML commands, on the other hand, are used to manipulate the data within the database, including inserting, updating, and deleting data in tables.

Let's start by looking at the syntax and usage of DDL-create and DML-insert

commands: DDL-Create Command:

The create command is used to create a new table in the database. The basic syntax of the create command is as follows:

CODE :-

```
CREATE TABLE
table_name (
column1
datatype,
column2
datatype,
column3
datatype,
....
);
```

For example, to create a table named "customers" with columns for "id", "name", "email", and "phone", the following command would be used:

CODE :-

```
CREATE TABLE
customers ( id
INT PRIMARY
KEY,
name
VARCHAR(50),
email
VARCHAR(50),
phone VARCHAR(20)
);
```

DML-Insert Command:
Internship-II(1010043192)

Enrollmentno

The insert command is used to insert data into a table in the database. The basic syntax of the insert command is as follows:

CODE :-

```
INSERT INTO table_name (column1, column2,
column3, ...) VALUES (value1, value2, value3, ...);
```

For example, to insert a new row of data into the "customers" table created in the previous example, the following command would be used:

CODE :-

```
INSERT INTO customers (id, name, email, phone)
VALUES (1, 'John Doe', 'john@example.com', '555-1234');
```

This command would insert a new row into the "customers" table with the values specified for the "id", "name", "email", and "phone" columns.

I hope this helps you understand the basics of DDL-create and DML-insert commands in SQL. If you have any further questions, feel free to ask!

PRACTICAL-14

AIM :- Create following Table

1. Job (job_id, job_title, min_sal, max_sal)

COLUMN NAME	DATA TYPE
job_id	Varchar(15)
job_title	Varchar(30)
min_sal	Int
max_sal	Int

CODE :-

```
CREATE TABLE Job (
  job_id VARCHAR(15) PRIMARY KEY,
  job_title VARCHAR(30),
  min_sal INT,
  max_sal INT
);
```

1. Employee (emp_no, emp_name, emp_sal, emp_comm, dept_no)

COLUMN NAME	DATA TYPE
emp_no	Int
emp_name	Varchar(30)
emp_sal	decimal(8,2)
emp_comm	decimal(6,1)
dept_no	Int

CODE :- CREATE

TABLE

```
Employee (
  emp_no INT
  PRIMARY KEY,
  emp_name
  VARCHAR(30),
  emp_sal
  DECIMAL(8,2),
  emp_comm
  DECIMAL(6,1),
  dept_no INT
);
```

2. deposit(a_no,cname,bname,amount,a_date)

COLUMN NAME	DATA TYPE
a_no	Int,identity
cname	Varchar(50)
bname	Varchar(30)
amount	Decimal(4,2)
a_date	Date

CODE :- CREATE TABLE

```
deposit ( a_no INT
IDENTITY PRIMARY
KEY, cname
VARCHAR(50),
bname
VARCHAR(30),
amount
DECIMAL(4,2),
a_date DATE
);
```

3. borrow(loanno,cname,bname,amount)

COLUMN NAME	DATA TYPE
loanno	Int
cname	Varchar(25)
bname	Varchar(20)



**SILVER OAK
UNIVERSITY**
EDUCATION TO INNOVATION

amount	Decimal(6,2)
--------	--------------

CODE :-

```
CREATE TABLE borrow
(
    loanno INT
PRIMARY KEY, cname
VARCHAR(25),
    bname VARCHAR(20),
    amount DECIMAL(6,2)
);
```

PRACTICAL-15

AIM :- Create tables and insert sample data in tables.

Write SQL queries to insert following data into tables

Insert following values in the table **Employee**.

emp_n	emp_name	emp_sal	emp_comm	dept_no
101	Smith	800		20
102	Snehal	1600	300	25
103	Adama	1100	0	20
104	Aman	3000		15
105	Anita	5000	50000	10
106	Sneha	2450	24500	10
107	Anamika	2975		30

CODE :-

```
CREATE TABLE Employee (
    emp_no INT PRIMARY
KEY, emp_name
VARCHAR(30) NOT
NULL, emp_sal
DECIMAL(8,2) NOT
NULL,
    emp_comm
DECIMAL(6,1), dept_no
INT NOT NULL
);
```

INSERT INTO Employee (emp_no, emp_name, emp_sal, emp_comm, dept_no) VALUES
Internship-II(1010043192) Enrollmentno

(101, 'Smith', 800.00, 20, 0),
 (102, 'Snehal', 1600.00, 300, 25),
 (103, 'Adama', 1100.00, 0, 20),
 (104, 'Aman', 3000.00, 15, 0),
 (105, 'Anita', 5000.00, 50000, 10),
 (106, 'Sneha', 2450.00, 24500, 10),
 (107, 'Anamika', 2975.00, 30, 0);

AIM :- Create tables and insert sample data in tables.

Write SQL queries to insert following data into tables

Insert following values in the table **Job**.

job_id	job_name	min_sal	max_sal
IT_PROG	Programmer	4000	10000
MK_MGR	Marketing manager	9000	15000
FI_MGR	Finance manager	8200	12000
FI_ACC	Account	4200	9000
LEC	Lecturer	6000	17000
COMP_OP	Computer Operator	1500	3000

CODE :- CREATE TABLE Job (
 job_id VARCHAR(15)
 PRIMARY KEY, job_name
 VARCHAR(30) NOT
 NULL,
 min_sal
 DECIMAL(10,2) NOT
 NULL,
 max_sal DECIMAL(10,2) NOT NULL
);

INSERT INTO Job (job_id, job_name, min_sal, max_sal)
 VALUES ('IT_PROG', 'Programmer', 4000.00,
 10000.00),
 ('MK_MGR', 'Marketing manager', 9000.00, 15000.00),

('FI_MGR', 'Finance manager', 8200.00, 12000.00),
 ('FI_ACC', 'Account', 4200.00, 9000.00),
 ('LEC', 'Lecturer', 6000.00, 17000.00),
 ('COMP_OP', 'Computer Operator', 1500.00, 3000.00);

AIM :- Create tables and insert sample data in tables.

Write SQL queries to insert following data into table.

Insert following values in the table **deposit**.

A_no	cname	Bname	Amount	date
101	Anil	andheri	7000	01-jan-06
102	sunil	virar	5000	15-jul-06
103	jay	villeparle	6500	12-mar-06
104	vijay	andheri	8000	17-sep-06
105	keyur	dadar	7500	19-nov-06
106	mayur	borivali	5500	21-dec-06

CODE :-


```
CREATE TABLE
deposit ( a_no INT
IDENTITY
PRIMARY KEY,
cname VARCHAR(50)
NOT NULL,
bname VARCHAR(30)
NOT NULL, amount
DECIMAL(8,2) NOT
NULL,
a_date DATE NOT NULL
);
```

```
INSERT INTO deposit (cname, bname, amount, a_date)
VALUES ('Anil', 'andheri', 7000.00, '2006-01-01'),
('sunil', 'virar', 5000.00, '2006-07-15'),
('jay', 'villeparle', 6500.00, '2006-03-12'),
('vijay', 'andheri', 8000.00, '2006-09-17'),
('keyur', 'dadar', 7500.00, '2006-11-19'),
('mayur', 'borivali', 5500.00, '2006-12-21');
```

PRACTICAL-16

AIM :- Write the SQL queries to provide constraints on given tables.

Create A Database Sales and Write SQL Queries to create following tables with all constraints mentioned in image.

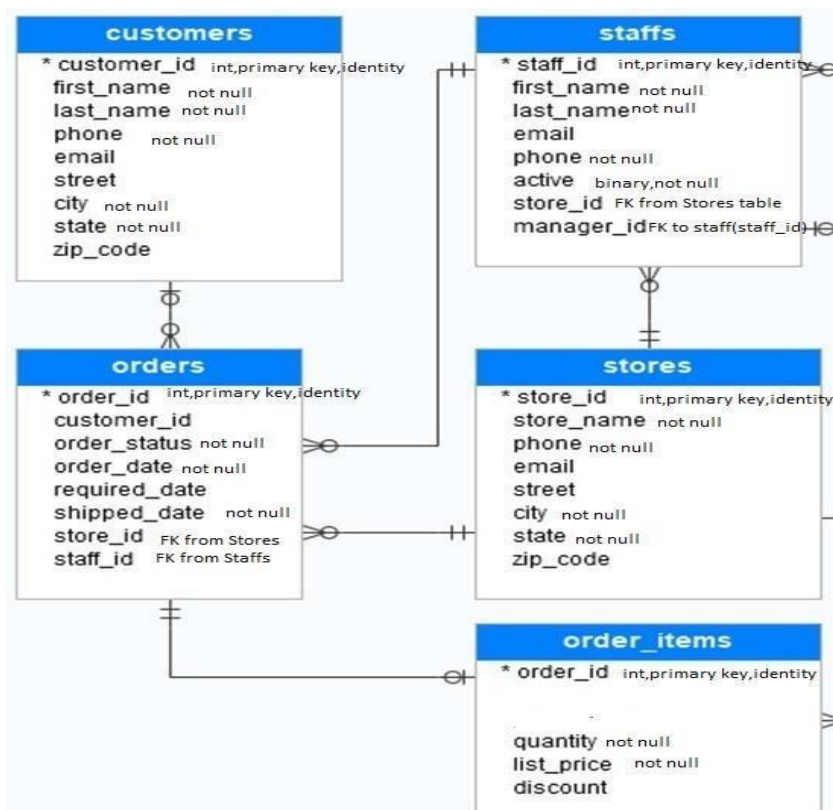

CODE :-

```

CREATE TABLE
customers ( customer_id
INT PRIMARY KEY,
first_name
VARCHAR(50) NOT
NULL,
last_name
VARCHAR(50) NOT
NULL, phone
VARCHAR(20), email
VARCHAR(100), street
VARCHAR(100), city
VARCHAR(100), state
VARCHAR(50) NOT
NULL, state

```


VARCHAR(50) NOT
NULL,



zip_code VARCHAR(20)

);

```
CREATE TABLE staff (  
  staff_id INT PRIMARY  
  KEY, first_name  
  VARCHAR(50) NOT  
  NULL, last_name  
  VARCHAR(50) NOT  
  NULL, email  
  VARCHAR(100), phone  
  VARCHAR(20) NOT  
  NULL,
```

active BOOLEAN NOT NULL,

store_id INT,

FOREIGN KEY (store_id) REFERENCES stores(store_id)

);

```
CREATE TABLE stores  
( store_id INT PRIMARY  
  KEY, store_name  
  VARCHAR(50) NOT  
  NULL, phone  
  VARCHAR(20) NOT  
  NULL,
```

email VARCHAR(100),
street

VARCHAR(100), city

VARCHAR(50) NOT

NULL, state

VARCHAR(50)

NOT

NULL, zip_code

VARCHAR(20),

manager_id INT,

FOREIGN KEY (manager_id) REFERENCES staff(staff_id)

);

```
CREATE TABLE orders (  
  order_id INT PRIMARY  
  KEY, order_date DATE  
  NOT NULL, required_date  
  DATE, shipped_date DATE
```

NOT NULL, order_status
VARCHAR(20) NOT NULL,

```
customer
_id
    INT
, staff_id
    INT,
store_id
    INT,
FOREIGN KEY (customer_id) REFERENCES
customers(customer_id), FOREIGN KEY (staff_id)
REFERENCES staff(staff_id),
FOREIGN KEY (store_id) REFERENCES stores(store_id)
);
```

```
CREATE TABLE
order_items ( order_id
    INT, item_id INT
PRIMARY KEY, quantity
    INT NOT NULL, list_price
    DECIMAL(10, 2) NOT
    NULL,
discount DECIMAL(5, 2),
FOREIGN KEY (order_id) REFERENCES orders(order_id)
);
```

PRACTICAL-17

AIM :- Write the SQL queries to perform various aggregate functions on table data.

1. List total deposit from deposit.

CODE :- SELECT SUM(amount) AS total_deposit FROM deposit;

2. List total amount from andheri branch

CODE :- SELECT SUM(amount) AS total_amount FROM deposit WHERE
bname = 'andheri';

3. Count total number of customers

CODE :- SELECT COUNT(DISTINCT cname) AS total_customers FROM deposit;

4. Count total number of customer's cities

CODE :- SELECT COUNT(DISTINCT bname) AS total_cities FROM deposit;

5. Update the value dept_no to 10 where second character of emp. name is 'm'.

CODE :- UPDATE Employee SET dept_no = 10 WHERE emp_name LIKE '_m%';

6. Update the value of employee name whose employee number is 103.

CODE :- UPDATE Employee SET emp_name = 'Adam' WHERE emp_no = 103;

7. Write a query to display the current date. Label the column Date

CODE :- SELECT GETDATE() AS Date;

8. For each employee, display the employee number, salary, and salary increased by 15% and expressed as a whole number. Label the column New Salary

CODE :- SELECT emp_no, emp_sal, ROUND(emp_sal*1.15,0) AS "New Salary" FROM Employee;

9. Modify your previous query to add a column that subtracts the old salary from the new salary. Label the column Increment.

CODE :- SELECT emp_no, emp_sal, ROUND(emp_sal*1.15,0) AS "New Salary", ROUND(emp_sal*0.15,0) AS Increment FROM Employee;

PRACTICAL-18

AIM :- Write the SQL queries to perform numeric, date and String functions.

1. Retrieve all data from employee, jobs and deposit.

CODE :- SELECT * FROM
employee;
SELECT * FROM
jobs;
SELECT * FROM deposit;

2. Give details of account no. and deposited rupees of customers having account opened between dates 01-01-06 and 25-07-06.

CODE :- SELECT a_no, amount FROM deposit
WHERE a_date BETWEEN '2006-01-01' AND '2006-07-25';

3. Display all jobs with minimum salary is greater than 4000.

CODE:- SELECT * FROM
jobs WHERE
min_sal >
4000;

4. Display name and salary of employee whose department no is 20. Give alias name to name of employee.

CODE :- SELECT emp_no, emp_name AS employee_name,
emp_sal, dept_no FROM employee
WHERE dept_no = 20;

5. Display employee no,name and department details of those employee whose department lies in(10,20)

CODE :- SELECT emp_no, emp_name, dept_no
FROM employee WHERE dept_no IN (10,
20);

6. Display all employee whose name start with 'A' and third character is 'a'.

CODE :- SELECT * FROM employee
WHERE emp_name LIKE 'A
_a%';

7. Display name, number and salary of those employees whose name is 5 characters long and first three characters are 'Ani'.

CODE :- SELECT emp_name, emp_no,
emp_sal FROM employee WHERE
emp_name LIKE 'Ani_____';

8. Display the non-null values of employees and also employee name second characters should be 'n' and string should be 5 character long.



**SILVER OAK
UNIVERSITY**
EDUCATION TO INNOVATION

CODE :- SELECT * FROM employee

```
WHERE emp_name LIKE '_n%' AND LENGTH(emp_name)
= 5 AND emp_name IS
NOT NULL;
```

9. Display the null values of employee and also employee name's third character should be 'a'.

CODE :- SELECT * FROM employee

```
WHERE emp_name LIKE '_a%' AND emp_name IS NULL;
```

PRACTICAL-19

AIM :- Make a Resume using the HTML tags without CSS.

CODE :-

```
<!DOCTYPE
E html>

<html>

<head>

    <title>My Resume</title>

</head>

<body>

    <h1>Guddu Giri</h1>

    <div>Website designer</div>

    <div>guddugiri216@gmail.com</div>

    <div>7985248023</div>

    <div>Ahmedabad, Gujarat</div>

    <h3>Objective</h3>
```


<p>To obtain a challenging position as a software engineer where I can utilize my skills and knowledge to develop innovative solutions for complex problems.</p>

<h3>Education</h3>

B.Tech(IT), Aditya Silver oak Institute of Technology, 2022

12th Gurukul Mission Sr.sec. School UP 2020-2021

10th Smart Move Academy , 2018-2029

<h3>Skills</h3>

Proficient in Java, C++, Python, HTML, CSS,Bootstrap,Sql and JavaScript

Strong problem-solving and critical thinking skills

<h3>Language</h3>

English

Hindi

<h3>Hobbies</h3>

Writing

Cooking

Network marketing

<h4>Certificate</h4>

Artificial Intelligence

HTML

CSS

</body>

</html>

Guddu Giri

Website designer
guddugiri216@gmail.com
7985248023
Ahmedabad, Gujarat

Objective

To obtain a challenging position as a software engineer where I can utilize my skills and knowledge to develop innovative solutions for complex problems.

Education

- B.Tech(IT), Aditya Silver oak Institute of Technology, 2022
- 12th Gurukul Mission Sr.sec. School UP 2020-2021
- 10th Smart Move Academy , 2018-2029

Skills

- Proficient in Java, C++, Python, HTML, CSS,Bootstrap,Sql and JavaScript
- Strong problem-solving and critical thinking skills

Language

- English
- Hindi

Hobbies

- Writing
- Cooking
- Network marketing

Certificate

- Artificial Intelligence
- HTML
- CSS

PRACTICAL-20

AIM :- Create an HTML webpage that shows Poster Presentation using all Table Properties.

CODE :-

```
<!DOCTYPE  
E html>  
  
<html>
```

```
<head>
  <title>Poster Presentation</title>
  <style>
    table {
      border-collapse:
collapse;      width: 100%;
    }
    th, td {
      border: 1px solid
black; padding: 8px;
      text-align: left;
    }
    th {
      background-color: #f2f2f2;
    }
    .highlight {
      background-color: yellow;
    }
  </style>
</head>
<body>
  <h1>Poster Presentation</h1>

  <table>
    <thead>
      <tr>
        <th>Presenter</th>
        <th>Title</th>
        <th>Date</th>
      </tr>
```

</thead>

<tbody>

<tr>

<td>Vijaya Raghavan</td>

<td>Effects of Exercise on Mental Health</td>

<td>Sep 3, 2019</td>

</tr>

<tr>

<td>Pratyasha Jain</td>

<td>Impact of Social Media on Adolescents</td>

<td>March 1, 2023</td>

</tr>

<tr>

<td>K. Vijayaraghavan</td>

<td>The Role of Nutrition in Aging</td>

<td>Sep 22, 2008</td>

</tr>

</tbody>

</table>

<p>Here are some key takeaways from the presentations:</p>

<table>

<tr>

<th>Presenter</th>

<th>Key Takeaway</th>

</tr>

<tr>

<td>Vijaya Raghavan</td>

<td class="highlight">Exercise can improve mental health outcomes in a variety of populations, including those with depression and anxiety.</td>

</tr>

<tr>

<td>Pratyasha Jain</td>

<td class="highlight">Social media use may contribute to increased rates of anxiety and depression among adolescents.</td>

</tr>

<tr>

<td>K. Vijayaraghavan</td>

<td class="highlight">Proper nutrition can help slow the aging process and prevent age- related diseases.</td>

</tr>

</table>

<p>Overall, these presentations highlight the important role that lifestyle factors can play in both physical and mental health outcomes. By making small changes to our diet and exercise habits, we can improve our overall well-being.</p>

</body>

</html>

OUTPUT :-

Poster Presentation

Presenter	Title	Date
Vijaya Raghavan	Effects of Exercise on Mental Health	Sep 3, 2019
Pratyasha Jain	Impact of Social Media on Adolescents	March 1, 2023
K. Vijayaraghavan	The Role of Nutrition in Aging	Sep 22, 2008

Here are some key takeaways from the presentations:

Presenter	Key Takeaway
Vijaya Raghavan	Exercise can improve mental health outcomes in a variety of populations, including those with depression and anxiety.
Pratyasha Jain	Social media use may contribute to increased rates of anxiety and depression among adolescents.
K. Vijayaraghavan	Proper nutrition can help slow the aging process and prevent age-related diseases.

Overall, these presentations highlight the important role that lifestyle factors can play in both physical and mental health outcomes. By making small changes to our diet and exercise habits, we can improve our overall well-being.

PRACTICAL-21

AIM :- Create an HTML page table and form

CODE :- <!DOCTYPE html>

```
<html>
<head>
<title>Table and Form with CSS</title>
<style>
/* Table Styles
*/ table {
border-collapse:
collapse; width: 100%;
}

th, td
{ text-
align:
left;
padding
:
8px;
border-bottom: 1px solid #ddd;
}

th {
background-color: #f2f2f2;
}

/* Form
Styles
*/ form
{ width:
50%;
margin: 0 auto;
}
```

```
label {  
display  
:  
block;  
margin  
-  
bottom:  
8px;  
}
```

```
input[type="text"],  
textarea { width:  
100%; padding:  
12px 20px; margin:  
8px 0; box-sizing:  
border-box;  
border:  
2px solid #ccc;  
border-radius:  
4px;  
resize: vertical;  
}
```

```
input[type="submit"] { background-  
color: #4CAF50;  
color: white;  
padding: 12px  
20px; border:  
none;  
border-  
radius: 4px;  
cursor: pointer;  
}
```

```
input[type="submit"]:hover  
{ background-color:  
#45a049;  
}
```

```
.form-group {  
margin-  
bottom: 16px;
```

}




```
.error
{
color:
red;
font-
size
:
12px;
margi
n-
top:
4px;
}

</style>
</head>
<body>
<h1>Table and Form</h1>

<table>
<thead>
<tr>
<th>Name</th>
<th>Email</th>
<th>Phone</th>
</tr>
</thead>
<tbody>
<tr>
<td>Guddu giri</td>
<td>guduxt@example.com</td>
<td>8955858555</td>
</tr>
<tr>
<td>Smit Gajera</td>
<td>gajera@example.com</td>
```



<td>7985248023</td>

</tr>

</tbody>

</table>

<form>

<h2>Contact Form</h2>

<div class="form-group">

<label for="name">Name</label>

<input type="text" id="name" name="name" required>

Please enter your name

</div>

<div class="form-group">

<label for="email">Email</label>

<input type="text" id="email" name="email" required>

Please enter a valid email address

</div>

<div class="form-group">

<label for="message">Message</label>

<textarea id="message" name="message" required></textarea>

Please enter a message

</div>

<input type="submit" value="Send">

</form>

</body>

</html>

OUTPUT :-

Table and Form

Name	Email	Phone
Yash Sojitra	sojitra@example.com	8955858555
Smit Gajera	gajera@example.com	7856855678

Contact Form

Name

Please enter your name

Email

Please enter a valid email address

Message

Please enter a message

Send

PRACTICAL-22

AIM :- Create Registration form and do proper validation with HTML 5 inbuilt functionality. (Don't use JavaScript).

CODE :-

```
<!DOCTYPE
E html>

<html>

<head>

<title>Table and Form with CSS</title>

<style>

/* Table Styles

*/ table {

border-collapse:
collapse; width:
100%;

}

th, td
{ text-
align:
left;
padding:
8px;
```



```
border-bottom: 1px solid #ddd;

}

th {
    background-color: #f2f2f2;
}

/* Form
Styles */
form {
width:
50%;
margin: 0
auto;

}

label {
display: block;
margin-
bottom: 8px;

}

input[type="text"],
textarea { width:
100%; padding:
12px 20px;
margin: 8px
0; box-sizing:
border-box;
border: 2px solid
#ccc; border-radius:
4px;

resize: vertical;

}

input[type="submit"] {
background-color:
#4CAF50; color:
white; padding:
12px 20px;
border:
none; border-
radius: 4px;
```



```
        cursor: pointer;
    }

    input[type="submit"]:hover
    { background-color: #45a049;
    }

    .form-group {
margin-bottom:
16px;
    }

    .error
    {   color:
red; font-
size:
12px;
        margin-top: 4px;
    }
</style>
</head>
<body>
    <h1>Table and Form</h1>

    <table>
    <thead>
        <tr>
            <th>Name</th>
            <th>Email</th>
            <th>Phone</th>
        </tr>
    </thead>
    <tbody>
        <tr>
            <td>Yash Sojitra</td>
            <td>sojitra@example.com</td>
```

```

<td>8955858555</td>
</tr>
<tr>
<td>Smit Gajera</td>
<td>gajera@example.com</td>
<td>7856855678</td>
</tr>
</tbody>
</table>

<form>
<h2>Contact Form</h2>

<div class="form-group">
<label for="name">Name</label>
<input type="text" id="name" name="name" required>
<span class="error">Please enter your name</span>
</div>

<div class="form-group">
<label for="email">Email</label>
<input type="text" id="email" name="email" required>
<span class="error">Please enter a valid email address</span>
</div>

<div class="form-group">
<label for="message">Message</label>
<textarea id="message" name="message" required></textarea>
<span class="error">Please enter a message</span>
</div>

<input type="submit" value="Send">

```

```
</form>  
</body>  
</html>
```

OUTPUT :-

Registration Form

Username:

Password:

Email:

Phone:

Age:

PRACTICAL-23

AIM : Make a Resume using the HTML tags with CSS.

CODE :-

```
<!DOCTYPE  
E html>  
<html>  
  
<head>
```



<title>Resume</title>

```
<style
>
body
{
    font-family:
    Arial, sans-serif;
    font-
    size: 16px;    line-
    height: 1.6;

    color: #333;

}
```

```
    h1, h2, h3
{ margin-top:
0;

}
```

```
    h1 {
font-
size:
36px;
color:
#0077b
5;

}
```

```
    h2 {
font-
size:
28px;
color:
#222;

}
```

```
    h3 {
font-
size:
24px;
color:
#555;

}
```

```
p {
```


marg
i n:
0;

```
}

.container
{ max-width:
800px;
margin: 0
auto;
padding:
20px;
}

.header {
text-align:
center; margin-
bottom: 30px;
}

.header h1 {
margin-bottom:
10px;
}

.contact-info {
margin-bottom:
30px;
}

.contact-info p {
margin-bottom:
10px;
}

.section {
margin-
bottom: 30px;
}

.section h2 {
margin-bottom: 20px;
}
```

```
.section ul
{
  list-style:
none; margin:
0;

  padding: 0;
}

.section li {
  margin-bottom: 10px;
}

.section li span
{
  display:
inline-block;
width: 150px;

  font-weight: bold;
}
</style>
</head>
<body>
<div class="container">
  <div class="header">
    <h1>Guddu giri</h1>
    <p>Web Developer</p>
  </div>

  <div class="contact-info">
    <p><strong>Email:</strong> guddugiri216@example.com</p>
    <p><strong>Phone:</strong> 7985248023</p>
    <p><strong>Website:</strong> crazycodes.com</p>
  </div>

  <div class="section">
    <h2>Summary</h2>
```

<p>Software developer with 5 years of experience creating dynamic web applications. Skilled in HTML, CSS, JavaScript, and various web frameworks. Passionate about developing clean, efficient code and delivering engaging user experiences.</p>

</div>

<div class="section">

<h2>Skills</h2>

HTML: Advanced

CSS: Advanced

JavaScript: Advanced

React: Intermediate

Angular: Intermediate

Vue: Beginner

</div>

<div class="section">

<h2>Experience</h2>

Web Developer

<p>Google corp</p>

<p>January 2023 - Present</p>

Develop and maintain company website using HTML, CSS, and JavaScript

Create and manage databases using MySQL

</body>

</html>

> OUTPUT:-



Durgesh suthar

web Developer

Email: suthardurgesh330@gmail.com

Phone: 9660579838

Website: crazy codes.com

Summary

Software developer with 5 years of experience creating dynamic web applications. Skilled in HTML, CSS, JavaScript, and various web frameworks. Passionate about developing clean, efficient code and delivering engaging user experiences.

Skills

HTML:	Advanced
CSS:	Advanced
JavaScript:	Advanced
React:	Intermediate
Angular:	Intermediate
Vue:	Beginner

Experience

Web Developer

Google corp

January 2023 - Present

Develop and maintain company website using HTML, CSS, and JavaScript

Create and manage databases using MySQL



Durgesh suthar

web Developer

Email: suthardurgesh330@gmail.com

Phone: 9660579838

Website: crazy codes.com

Summary

Software developer with 5 years of experience creating dynamic web applications. Skilled in HTML, CSS, JavaScript, and various web frameworks. Passionate about developing clean, efficient code and delivering engaging user experiences.

Skills

HTML:	Advanced
CSS:	Advanced
JavaScript:	Advanced
React:	Intermediate
Angular:	Intermediate
Vue:	Beginner

Experience

Web Developer

Google corp

January 2023 - Present

Develop and maintain company website using HTML, CSS, and JavaScript

Create and manage databases using MySQL

PRACTICAL-24

AIM :- Create an HTML Page containing the following Gray Layout using CSS

CODE :-

```
<!DOCTYPE
```

```
E html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
```

```

<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Gray layout 1</title>

<style>

    *{font-size: 30px;font-weight: bolder;}

    #r1{background-color: gray; height: 50px; width: 48%; padding-top:
10px;padding-left: 2%;margin-bottom: 20px;}

    #r2,#r5{background-color: gray; height: 40px; width: 48%; padding-top: 10px;padding-
left:
2%;margin-bottom: 20px; text-align: center;}

    #r3{background-color: gray; height: 70px; width: 48%; padding-top:
30px;padding-left: 2%;margin-bottom: 20px; text-align: center;}

    #r4{height: 500px; width: 100%; margin-bottom: 20px;}

    #r4 div{float: left; background-color: gray; padding-top: 250px; height:
250px; text-align: center;}

    #r4c1{width: 10%; margin-right: 5%; }

    #r4c2{width: 35%; }

</style>

</head>

<body>

    <div id="maindiv">

        <div id="r1">Logo</div>

        <div id="r2">Navigation</div>

        <div id="r3">Header</div>

        <div id="r4">

            <div id="r4c1">Side Bar</div>

            <div id="r4c2">Body Area</div>

        </div>

        <div id="r5">Footer</div>


    </div>

</body>

</html>

```

OUTPUT :-

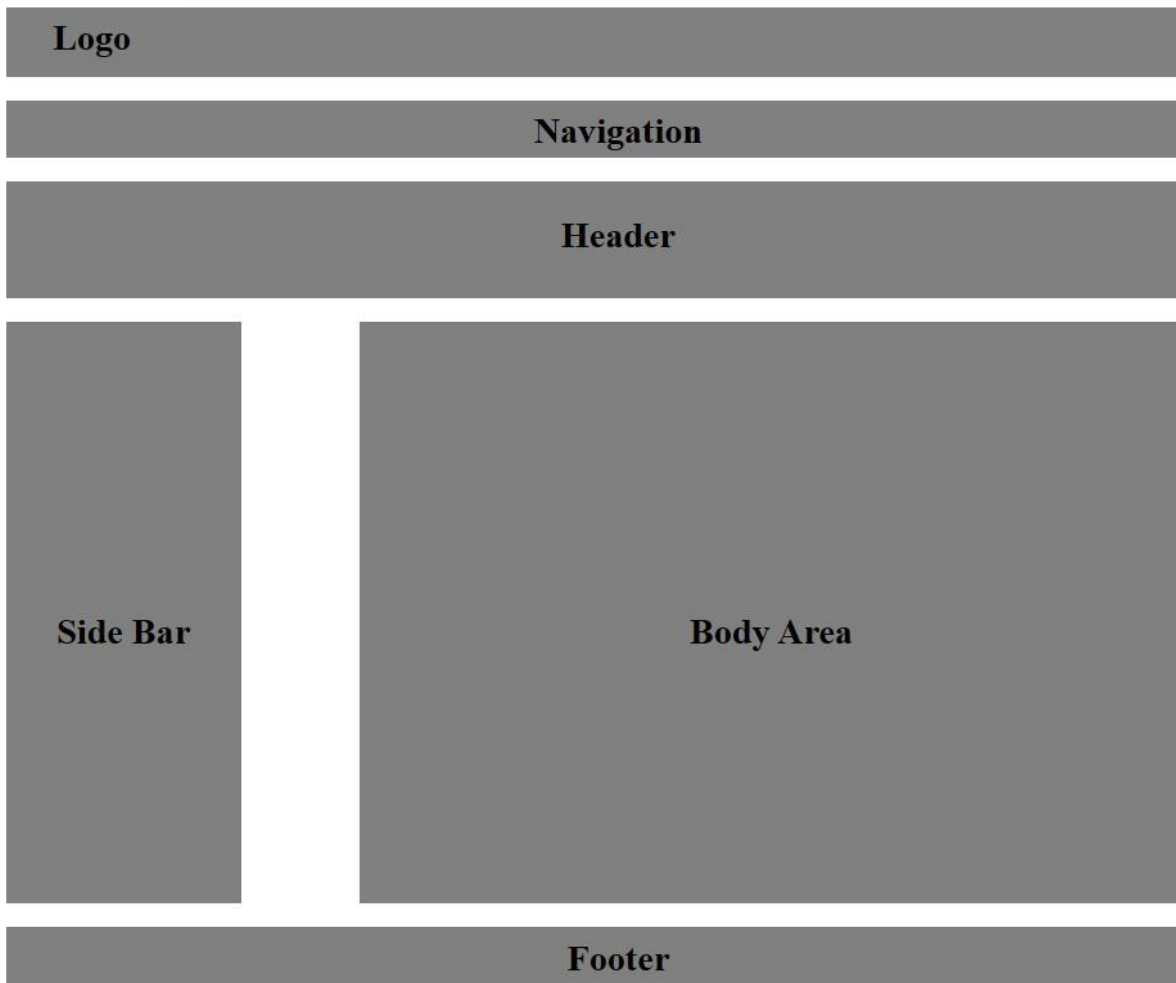

CODE :-

```
<!DOCTYPE
E html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta http-equiv="X-UA-Compatible" content="IE=edge">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Gray Layout 2</title>

<style>

  #r1{background-color: gray; width: 78%;padding-top: 15px;padding-left: 2%;
margin- left: 10%; height: 40px;}

  #r1c1{float: left; font-size: larger;}
```




```
#r1c2{margin-left:80%;padding-top: 5px;}

#r2, #r3{width: 80%;margin-left: 10%;height: 60px;padding-top: 30px;
background- color: gray;margin-top: 10px; text-align: center;}

#r4 div{float: left; background-color: gray; font-weight: bolder;}

#r4c1{margin-left: 10%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}

#r4c2{margin-left: 2.5%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}

#r4c3{margin-left: 2.5%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}


#r5{width: 80%;margin-left: 10%;background-color: gray;margin-top:
220px;height: 30px;padding-top: 20px;text-align: center;}

</style>
</head>
<body>

<div id="r1">
  <div id="r1c1">Logo</div>
  <div id="r1c2">Navigation</div>
</div>
<div id="r2">Header</div>
<div id="r3">Intro Text Area</div>
<div id="r4">
  <div id="r4c1">Box 1</div>
  <div id="r4c2">Box 2</div>
  <div id="r4c3">Box 3</div>
</div>
<div id="r5">Footer</div>

</body>
</html>
```

OUTPUT :-

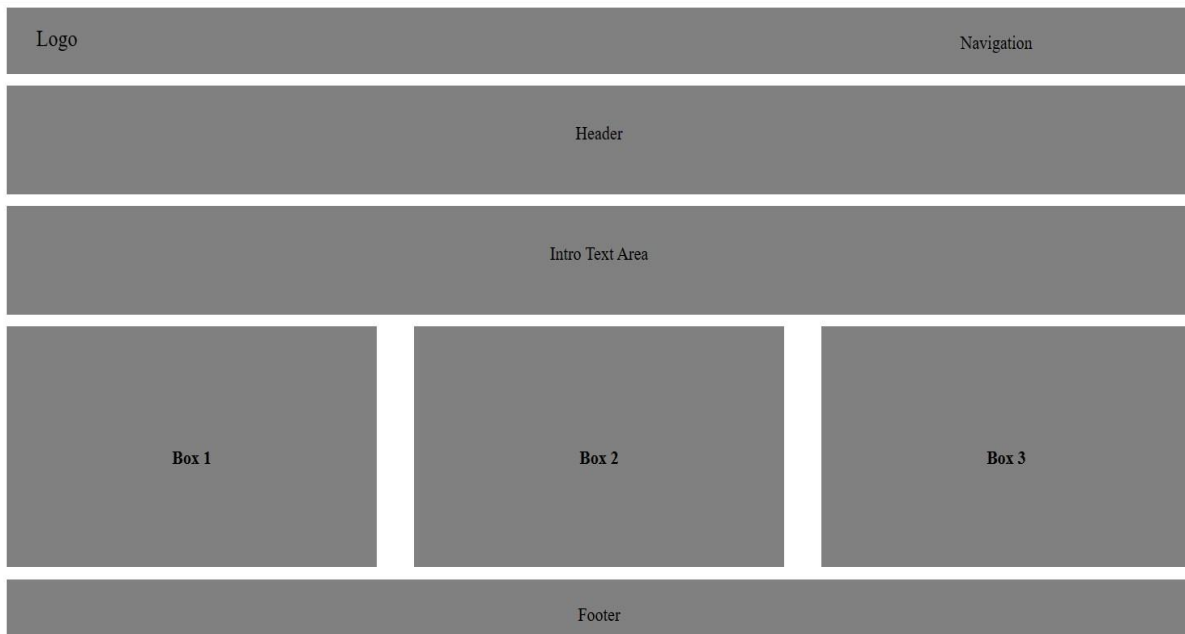

CODE :-

```
<!DOCTYPE
E html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta http-equiv="X-UA-Compatible" content="IE=edge">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Gray Layout 3</title>

<style>

  #r1{padding-top: 30px;height: 30px; margin-top: 10px;margin-left:
10%;width: 78%;paddingleft: 2%; background-color: gray;font-size: larger;}

  #r2 div{float: left;margin-left: 10%;margin-top: 10px;height: 40px;padding-top:
40px; text-align: center;}

  #r2c1{ width: 20%;margin-right: 5%;font-size:
large;} #r2c2{width: 45%; background-color:
gray;}

  #r3{margin-bottom: 10px; margin-left: 45%;width: 45%; height:
250px;padding-top: 250px;textalign: center;background-color: gray;margin-top:
100px;}

  #r4{margin-left: 10%; width: 80%;text-align: center;padding-top:
20px;height: 30px;backgroundcolor: gray;}
```




</style>

</head>

```
<body>
  <div id="r1">Logo</div>
  <div id="r2">
    <div id="r2c1">Navigation</div>
    <div id="r2c2">Header</div>
  </div>
  <div id="r3">Body Area</div>
  <div id="r4">Footer</div>
</body>
</html>
```

OUTPUT :-

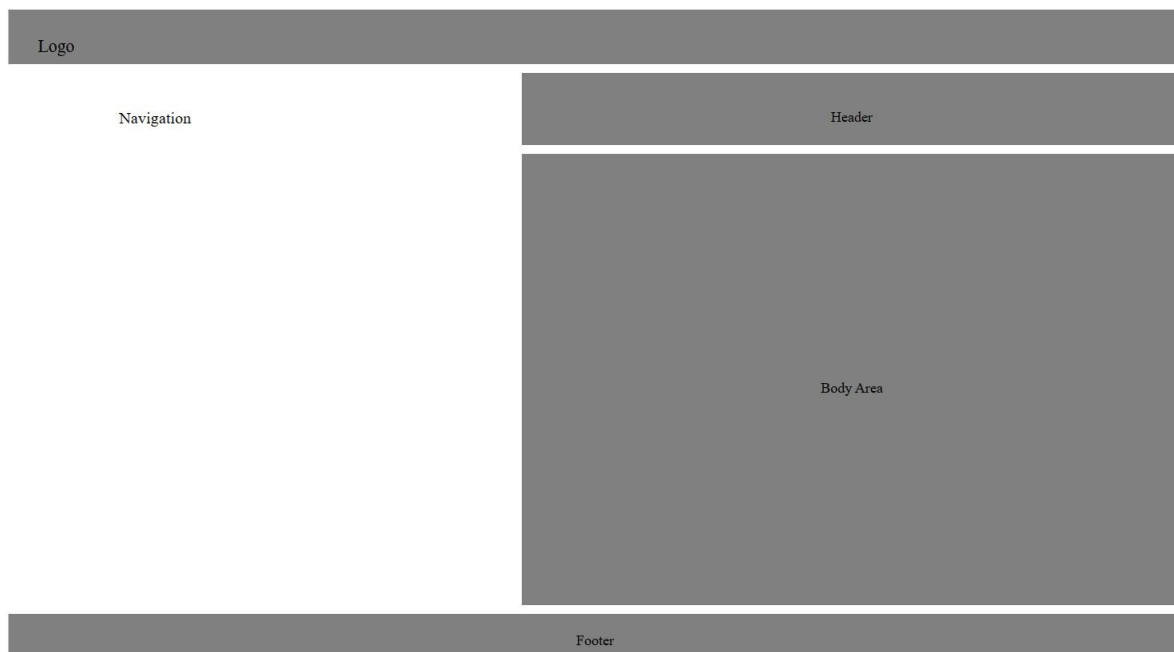

CODE :-

```
<!DOCTYPE
E html>

<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
```

```

<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Gray Layout 4</title>

<style>

    #r1{background-color: gray; width: 78%;padding-top: 15px;padding-left: 2%;
margin- left: 10%; height: 40px;}

    #r1c1{float: left; font-size: larger;}

    #r1c2{margin-left:80%;padding-top:
5px;}


    #r3{margin-bottom: 10px;height: 100px; margin-left: 10%;margin-top: 10px;}

    #c1,#c2,#c3{float: left; background-color: gray; width: 10%;margin-right:
15%; text-
align: center;}

    #c5,#c6,#c7{float: left;background-color: gray; width: 10%; margin-right:
15%;text-align: center;}    #c9,#c10,#c11{float: left;background-color: gray; width:
10%; margin-right: 15%;text-align:
center;}

    #c13,#c14,#c15{float: left;background-color: gray; width: 10%; margin-right:
15%;text- align:
center;}


    #r4 div{float: left; background-color: gray; font-weight: bolder;}

    #r4c1{margin-left: 10%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}

    #r4c2{margin-left: 2.5%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}

    #r4c3{margin-left: 2.5%;text-align: center;width: 25%;height:
100px;margin-top: 10px;paddingtop: 100px;}

    #r5{width: 80%;margin-left: 10%;background-color: gray;margin-top:
250px;height: 30px;padding-top: 20px;text-align: center;}

</style>

</head>

<body>

    <div id="r1">

```



```
<div id="r1c1">Logo</div>
<div id="r1c2">Navigation</div>
</div>
<div>
  <div></div>
</div>
<div id="r3">
  <div id="c1">1</div>
  <div id="c2">2</div>
  <div id="c3">3</div>
  <div id="c4">4</div><br>
  <div id="c5">5</div>
  <div id="c6">6</div>
  <div id="c7">7</div>
  <div id="c8">8</div><br>
  <div id="c9">9</div>
  <div id="c10">10</div>
  <div id="c11">11</div>
  <div id="c12">12</div><br>
  <div id="c13">13</div>
  <div id="c14">14</div>
  <div id="c15">15</div>
  <div id="c16">16</div>
</div>


<div id="r4">
  <div id="r4c1">Box 1</div>
  <div id="r4c2">Box 2</div>
  <div id="r4c3">Box 3</div>
</div>
```

```
<div id="r5">Footer</div>
```

```
</body>
```

```
</html>
```

OUTPUT:-

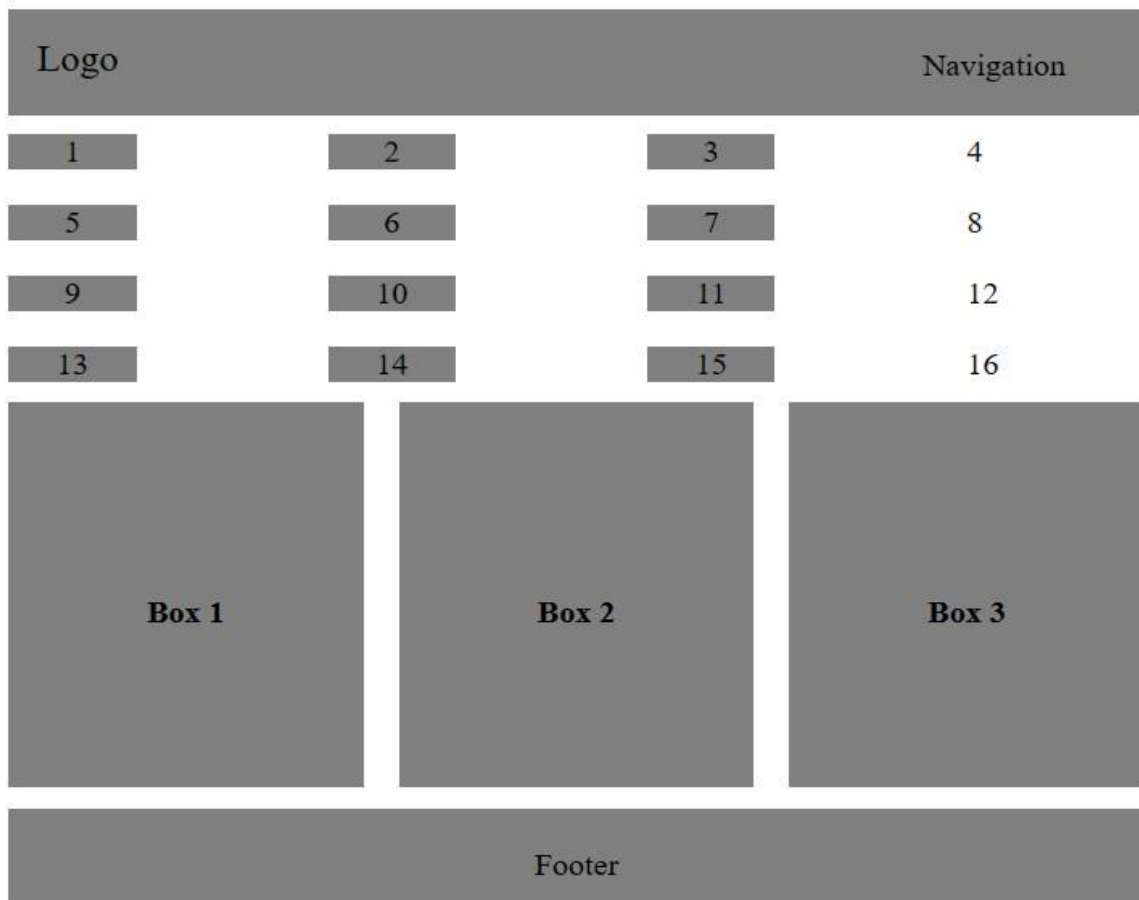

PRACTICAL-25

AIM :- Demonstrate JavaScript Form Validation with proper examples

CODE :-

```
<!DOCTYPE
```

```
E html>
```

```
<html>
```

```
<head>

<title>Basic Form Validation</title>

<script>

function

    validateForm() { var

        name =
document.forms["myForm"]["name"].value;  var email
= document.forms["myForm"]["email"].value;  var
password =
document.forms["myForm"]["password"].value;

        if (name == "" || email == "" || password ==

            "") { alert("Please fill out all
fields");    return false;

        }

    }

}

</script>

</head>

<body>

<form name="myForm" onsubmit="return validateForm()">

    <label for="name">Name:</label>

    <input type="text" id="name" name="name">

    <br><br>

    <label for="email">Email:</label>

    <input type="email" id="email" name="email">

    <br><br>

    <label for="password">Password:</label>

    <input type="password" id="password" name="password">

    <br><br>

    <input type="submit" value="Submit">

</form>

</body>

</html>
```


OUTPUT :-

Name:

Email:

Password:

This page says

Please fill out all fields

PRACTICAL-26

AIM :- Write a javascript to check if the number is even or odd.

CODE :-

```
<!DOCTYPE  
E html>  
  
<html>  
  
  <head>  
  
    <title>Even or Odd Checker</title>  
  
    <script>  
  
      function checkEvenOrOdd()  
  
      {  
  
        var number =  
document.getElementById("number").value; if  
(number%2==0)  
  
        {  
  
          document.getElementById("result").innerHTML = number + " is even";  
  
        } else {  
  
          document.getElementById("result").innerHTML = number + " is odd";  
  
        }  
  
      }  
  
    </script>
```

```
</head>
<body>
  <label for="number">Enter a number:</label>
  <input type="number" id="number">
  <br><br>
  <button onclick="checkEvenOrOdd()">Check</button>
  <br><br>
  <div id="result"></div>
</body>
</html>
```

OUTPUT :-

Enter a number:

3 is odd

Enter a number:

2 is even

PRACTICAL-27

AIM :- Create a page and access the LocationAPI

CODE :-

```
<!DOCTYPE
E html>

<html>

  <head>

    <title>Location API Example</title>

    <script>
```

```
function getLocation()
{
    if (navigator.geolocation)
    {
        navigator.geolocation.getCurrentPosition(showPosition);
    }
    else
    {
        alert("Geolocation is not supported by this browser.");
    }
}

function showPosition(position)
{
    var latitude =
position.coords.latitude;    var
longitude =
position.coords.longitude;    var
accuracy =
position.coords.accuracy;

    var timestamp = new Date(position.timestamp);

    document.getElementById("latitude").innerHTML = "Latitude: " + latitude;
document.getElementById("longitude").innerHTML = "Longitude: " + longitude;
document.getElementById("accuracy").innerHTML = "Accuracy: " + accuracy + "
meters"; document.getElementById("timestamp").innerHTML = "Timestamp: " +
timestamp;

}

</script>
</head>
<body>
<h1>Location API Example</h1>
<button onclick="getLocation()">Get Location</button>
<br><br>
```

```
<div id="latitude"></div>
<div id="longitude"></div>
<div id="accuracy"></div>
<div id="timestamp"></div>
</body>
</html>
```

OUTPUT :-

Location API Example

Get Location

Latitude: 21.535707
Longitude: 70.450813
Accuracy: 22 meters
Timestamp: Wed Mar 22 2023 10:14:58 GMT+0530 (India Standard Time)

PRACTICAL-28

AIM :- Create a simple XMLHttpRequest, and retrieve the data from the text file.

CODE :-

```
<!DOCTYPE
E html>

<html>

<head>

<title>XMLHttpRequest Example</title>

<script>

function loadData()

{

var xhr = new
XMLHttpRequest();
xhr.open('GET', 'example.txt');
```

```
xhr.onreadystatechange = function()
{
    if (xhr.readyState === XMLHttpRequest.DONE)
    {
        if (xhr.status === 200)
        {
            var response = xhr.responseText;
            document.getElementById('output').innerHTML =
            response;
        }
        else
        {
            document.getElementById('output').innerHTML = 'Error: ' + xhr.status;
        }
    }
};
xhr.send();
}
</script>
</head>
<body>
    <h1>XMLHttpRequest Example</h1>
    <button onclick="loadData()">Load Data</button>
    <br><br>
    <div id="output"></div>
</body>
</html>
```



OUTPUT :-

XMLHttpRequest Example

Load Data

Error: 0