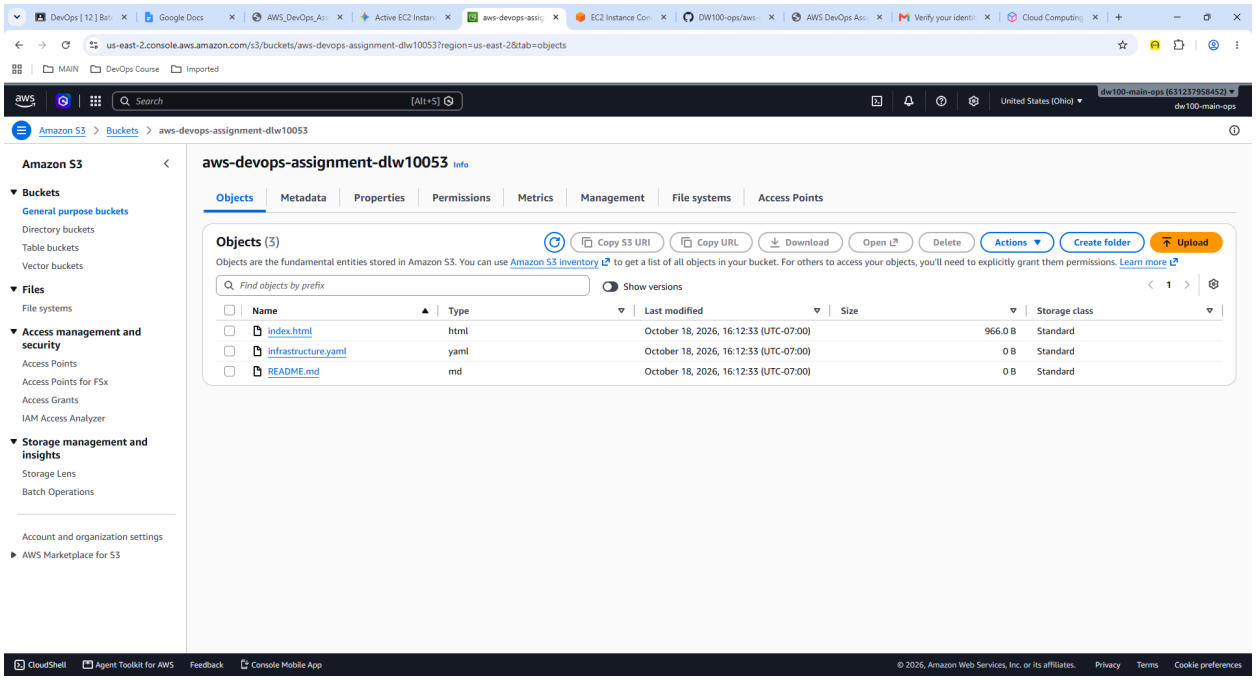
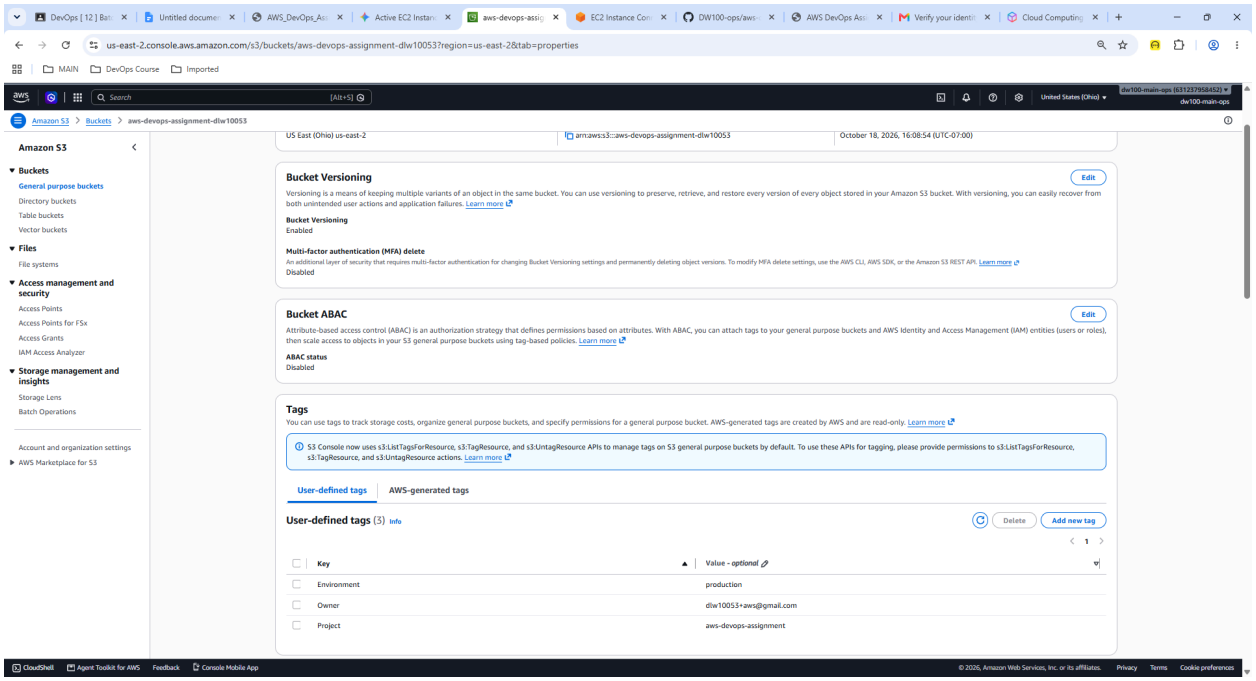
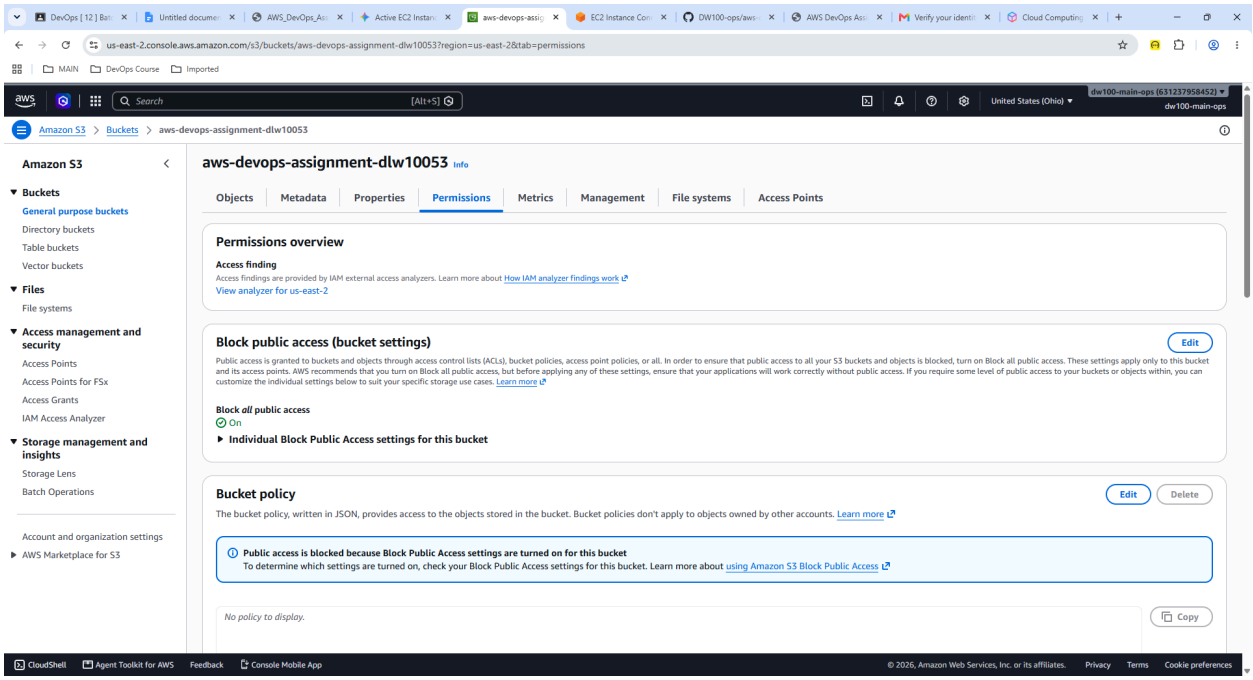

us-east-2.console.aws.amazon.com/s3/buckets/aws-devops-assignment-dlw10053?region=us-east-2&tab=objects
Amazon S3 > Buckets > aws-devops-assignment-dlw10053
aws-devops-assignment-dlw10053 Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (3)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Show versions
Name
Type
Last modified
Size
Storage class
index.html
html
October 18, 2026, 16:12:33 (UTC-07:00)
966.0 B
Standard
infrastructure.yaml
yaml
October 18, 2026, 16:12:33 (UTC-07:00)
0 B
Standard
README.md
md
October 18, 2026, 16:12:33 (UTC-07:00)
0 B
Standard


us-east-2.console.aws.amazon.com/s3/buckets/aws-devops-assignment-dlw10053?region=us-east-2&tab=properties
Bucket Versioning
Edit
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Enabled
Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. Learn more
Disabled
Bucket ABAC
Edit
Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. With ABAC, you can attach tags to your general purpose buckets and AWS Identity and Access Management (IAM) entities (users or roles), then scale access to objects in your S3 general purpose buckets using tag-based policies. Learn more
ABAC status
Disabled
Tags
You can use tags to track storage costs, organize general purpose buckets, and specify permissions for a general purpose bucket. AWS-generated tags are created by AWS and are read-only. Learn more
S3 Console now uses s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets by default. To use these APIs for tagging, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more
User-defined tags
AWS-generated tags
User-defined tags (3) Info
Delete
Add new tag
Key
Value - optional
Environment
production
Owner
dlw10053+aws@gmail.com
Project
aws-devops-assignment


us-east-2.console.aws.amazon.com/s3/buckets/aws-devops-assignment-dlw10053?region=us-east-2&tab=permissions
Search
[Alt+S]
United States (Ohio)
dw100-main-ops
Amazon S3 > Buckets > aws-devops-assignment-dlw10053
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Files
File systems
Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer
Storage management and insights
Storage Lens
Batch Operations
Account and organization settings
AWS Marketplace for S3
aws-devops-assignment-dlw10053 Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Permissions overview
Access finding
Access findings are provided by IAM external access analyzers. Learn more about How IAM analyzer findings work
View analyzer for us-east-2
Block public access (bucket settings)
Edit
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
On
Individual Block Public Access settings for this bucket
Bucket policy
Edit
Delete
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. Learn more
Public access is blocked because Block Public Access settings are turned on for this bucket
To determine which settings are turned on, check your Block Public Access settings for this bucket. Learn more about using Amazon S3 Block Public Access
No policy to display.
Copy
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences