

REACT NATIVE MODAL

FORM

DEMO



CONTENT





FORM

- Working with the various React Native components that are used to collect user input
- Include
 - Collecting text input
 - Selecting from a list of options
 - Collecting date/time input

COLLECTING TEXT INPUT

TEXT INPUT COMPONENT


- A foundational component for inputting text into the app via a keyboard
- Some props
 - placeholder



Search notes

Notes

- secureTextEntry (sensitive data)

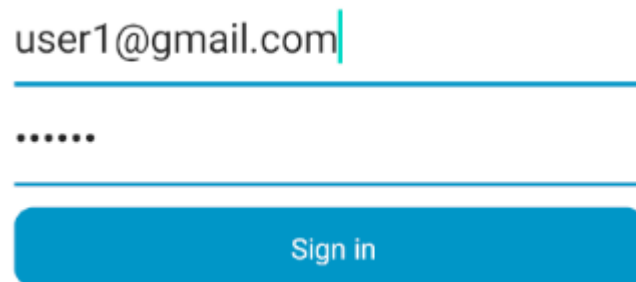


user1@gmail.com

.....

Sign in

► Some props

- `inputMode`
 - `none`
 - `text`
 - `decimal`
 - `numeric`
 - `tel`
 - `search`
 - `email`
 - `url`
- `onChangeText`
- `onSubmitEditing`

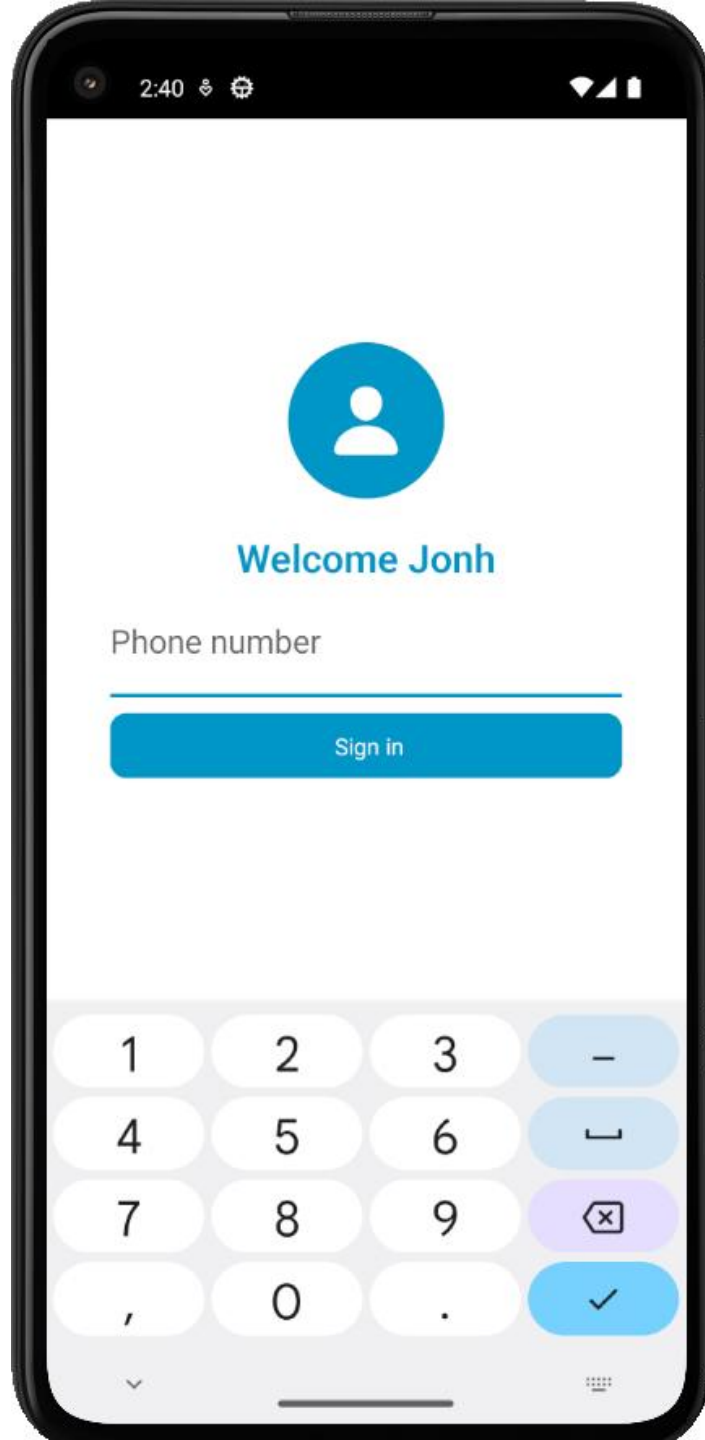


SAMPLE

```
const [email, setEmail] = useState("");
const [password, setPassword] = useState("");
```

...

```
<View style={styles.formContainer}>
  <View style={styles.inputContainer}>
    <TextInput
      placeholder="Email"
      inputMode="email"
      style={styles.inputText}
      onChangeText={(value) =>
        setEmail("email", value)} />
  </View>
  <View style={styles.inputContainer}>
    <TextInput
      placeholder="Password"
      secureTextEntry={true}
      returnKeyType="done"
      style={styles.inputText}
      onChangeText={(value) =>
        setPassword("password", value)}
    />
  </View>
```

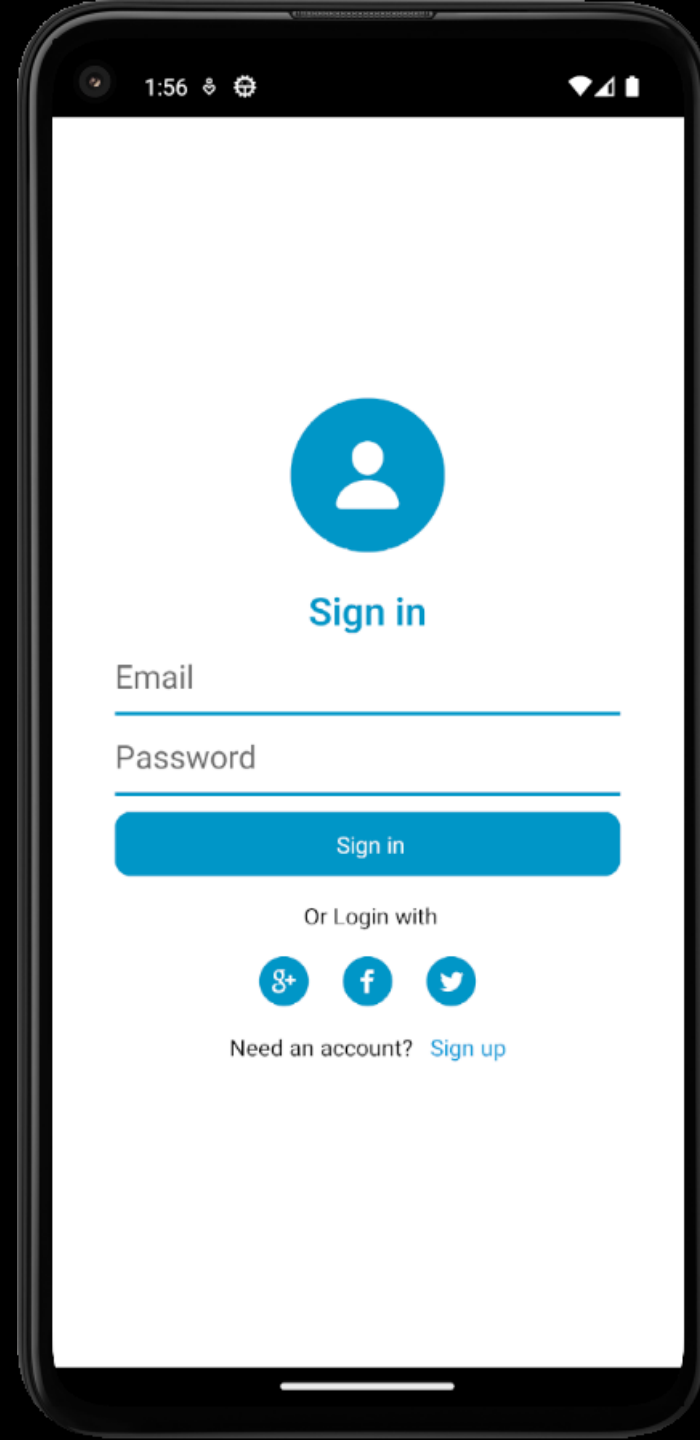

SELECTING FROM A LIST OF OPTIONS

PICKER COMPONENT

- Choose from a list of options
- `npx expo install @react-native-picker/picker`
- Some props
 - `mode`
 - `selectedValue`
 - `onValueChange`

SAMPLE


```

const [terms, setTerms] = useState([
  {id: 1, name:"1 months"}, {id: 2, name:"2 months"},
  {id:3, name: "3 months"}, {id: 4, name: "6 months"},
  {id: 5, name: "9 months"},{id: 6, name:"12 months"},
])
const [term, setTerm] = useState("9 months");
<View style={styles.inputContainer}>

  <View style={styles.inputContainer}>
    <Text style={styles.subTitle}> Choose Term </Text>
    <Picker style={styles.picker}
      mode="dialog"
      selectedValue={term}
      onValueChange={(itemValue, itemIndex) =>
        setTerm(itemValue)}>

      {terms.map(item => (
        <Picker.Item style={styles.itemPicker}
          key={item.id}
          label={item.name} value={item.name} />
      ))}
    </Picker>
  </View>

```

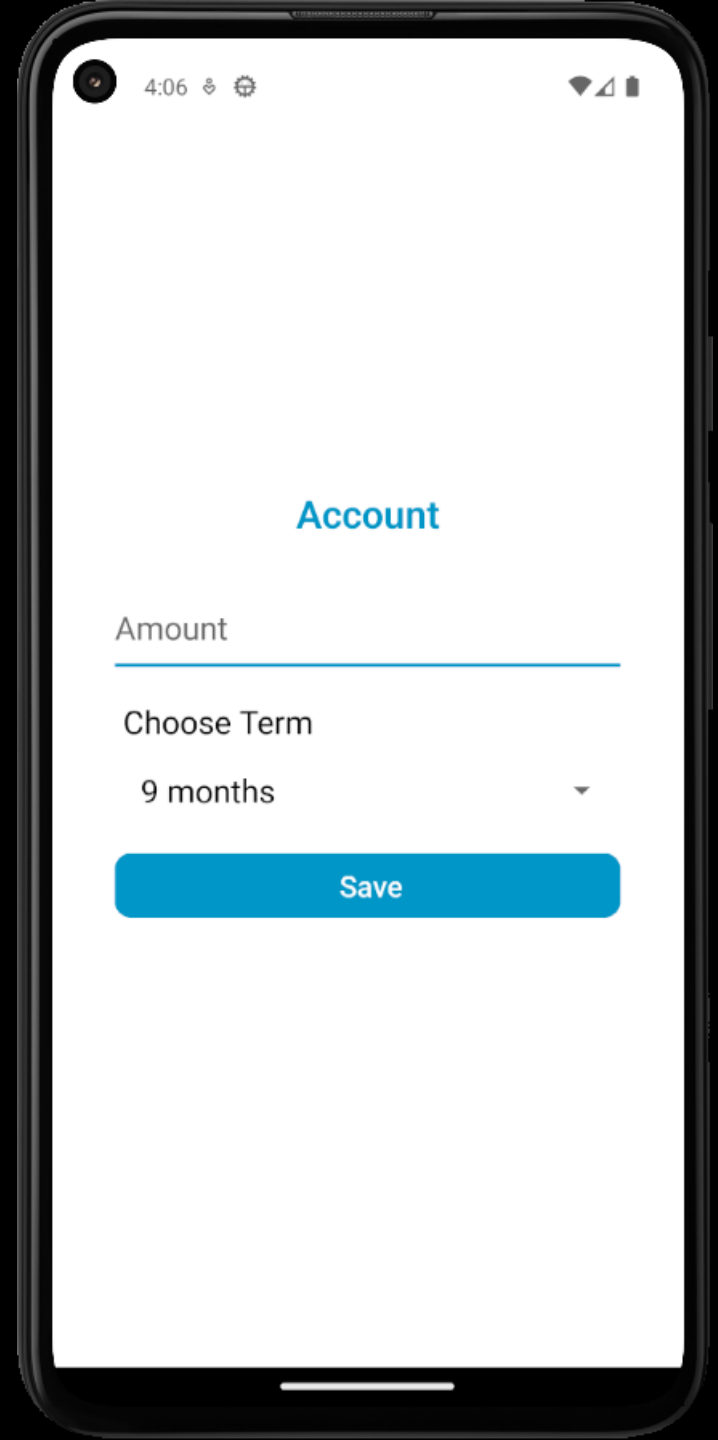


```

const [terms, setTerms] = useState([
  {id: 1, name:"1 months"}, {id: 2, name:"2 months"},
  {id:3, name: "3 months"}, {id: 4, name: "6 months"},
  {id: 5, name: "9 months"},{id: 6, name:"12 months"},
])
const [term, setTerm] = useState("9 months");
<View style={styles.inputContainer}>

  <View style={styles.inputContainer}>
    <Text style={styles.subTitle}> Choose Term </Text>
    <Picker style={styles.picker}
      mode="dialog"
      selectedValue={term}
      onValueChange={(itemValue, itemIndex) =>
        setTerm(itemValue)}>

      {terms.map(item => (
        <Picker.Item style={styles.itemPicker}
          key={item.id}
          label={item.name} value={item.name} />
      ))}
    </Picker>
  </View>

```

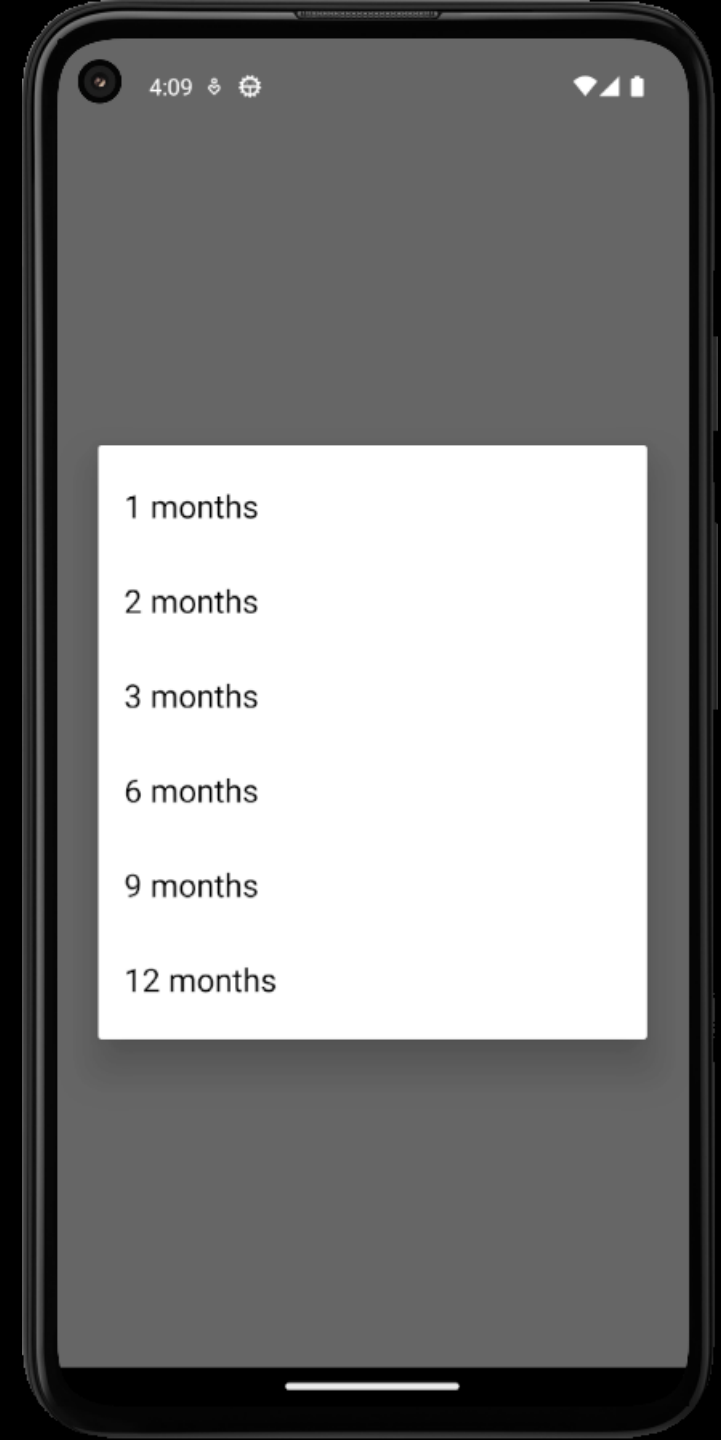

COLLECTING DATE/TIME INPUT

DATETIMEPICKER COMPONENT

- Provides access to the system UI for date and time
- npx expo install **@react-native-community/datetimepicker**
- Some props
 - mode
 - selectedValue
 - onValueChange

SAMPLE


```

import { View, Text,StyleSheet } from 'react-native'
import DateTimePicker from '@react-native-
community/datetimepicker'
import React, { useState } from 'react'


const DateTimePickerDemo = () => {
  const [date,setDate] = useState(new Date())
  return (
    <View style={styles.container}>

      <DateTimePicker
        value={date}
        mode='date'
        display='default'
        onChange={(e, d) => setDate(d)}  />

      <Text  styles={styles.title}>
        {date.toDateString()}</Text>
    </View>
  )
}

export default DateTimePickerDemo

```

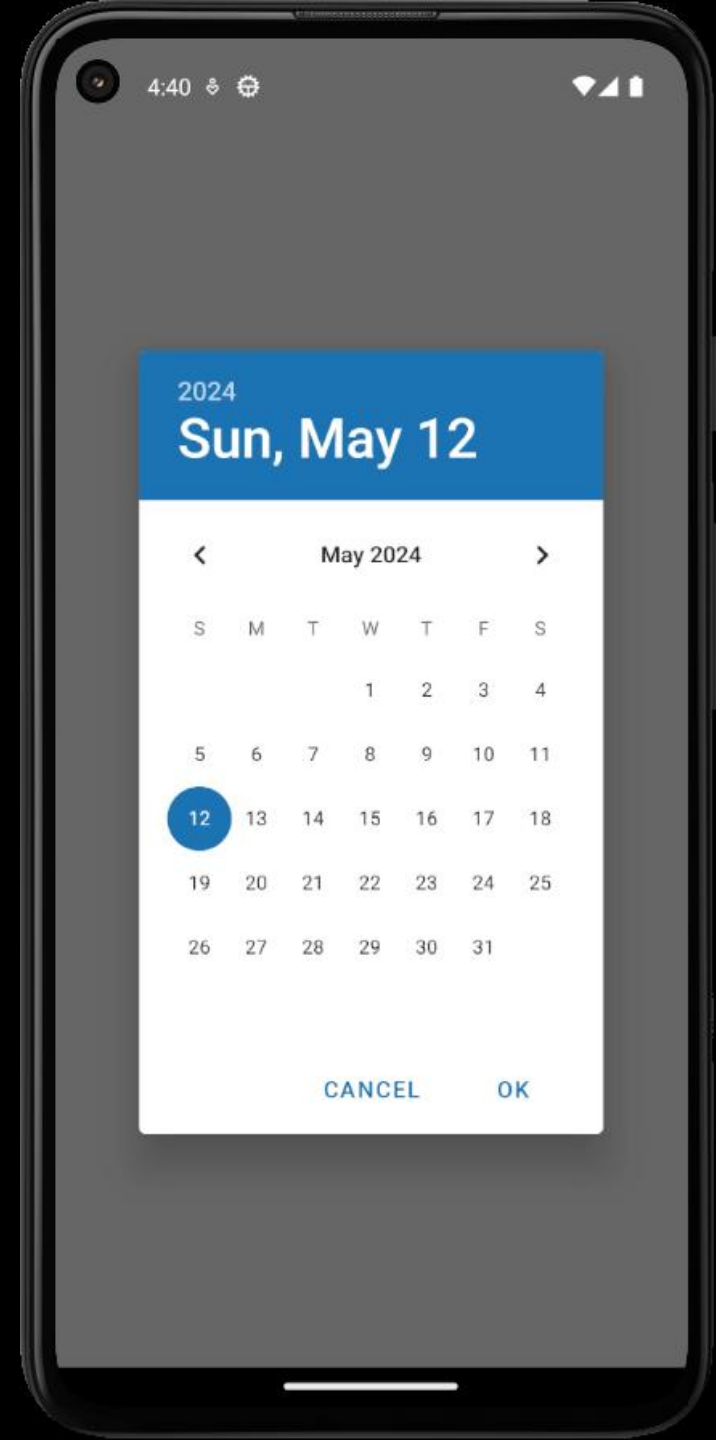

```

import { View, Text,StyleSheet } from 'react-native'
import DateTimePicker from '@react-native-
community/datetimepicker'
import React, { useState } from 'react'


const DateTimePickerDemo = () => {
  const [date,setDate] = useState(new Date())
  return (
    <View style={styles.container}>

      <DateTimePicker
        value={date}
        mode='date'
        display='default'
        onChange={(e, d) => setDate(d)}  />

      <Text  styles={styles.title}>
        {date.toDateString()}</Text>
    </View>
  )
}

export default DateTimePickerDemo

```

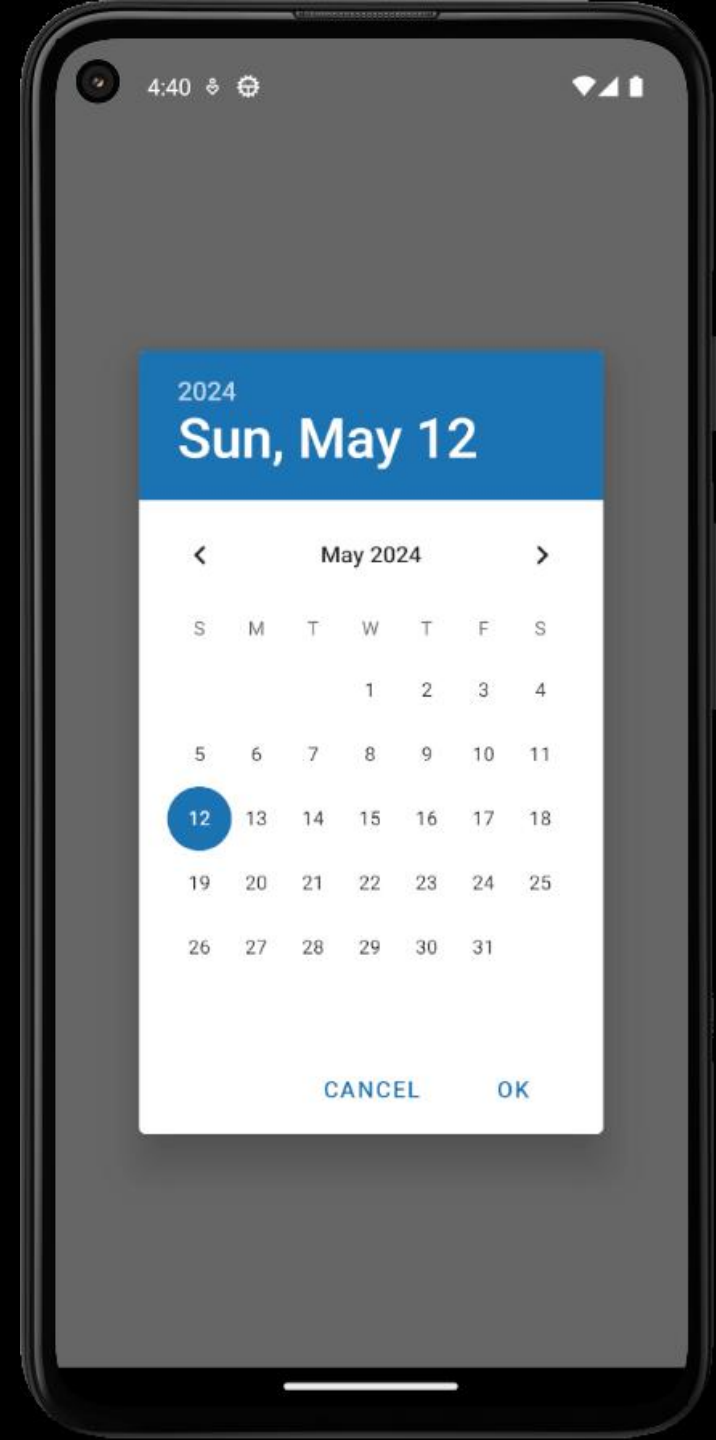

```

import { View, Text,StyleSheet } from 'react-native'
import DateTimePicker from '@react-native-
community/datetimepicker'
import React, { useState } from 'react'


const DateTimePickerDemo = () => {
  const [date,setDate] = useState(new Date())
  return (
    <View style={styles.container}>

      <DateTimePicker
        value={date}
        mode='time'
        display='spinner'
        onChange={(e, d) => setDate(d)}  />

      <Text  styles={styles.title}>
        {date.toDateString()}</Text>
    </View>
  )
}

export default DateTimePickerDemo

```

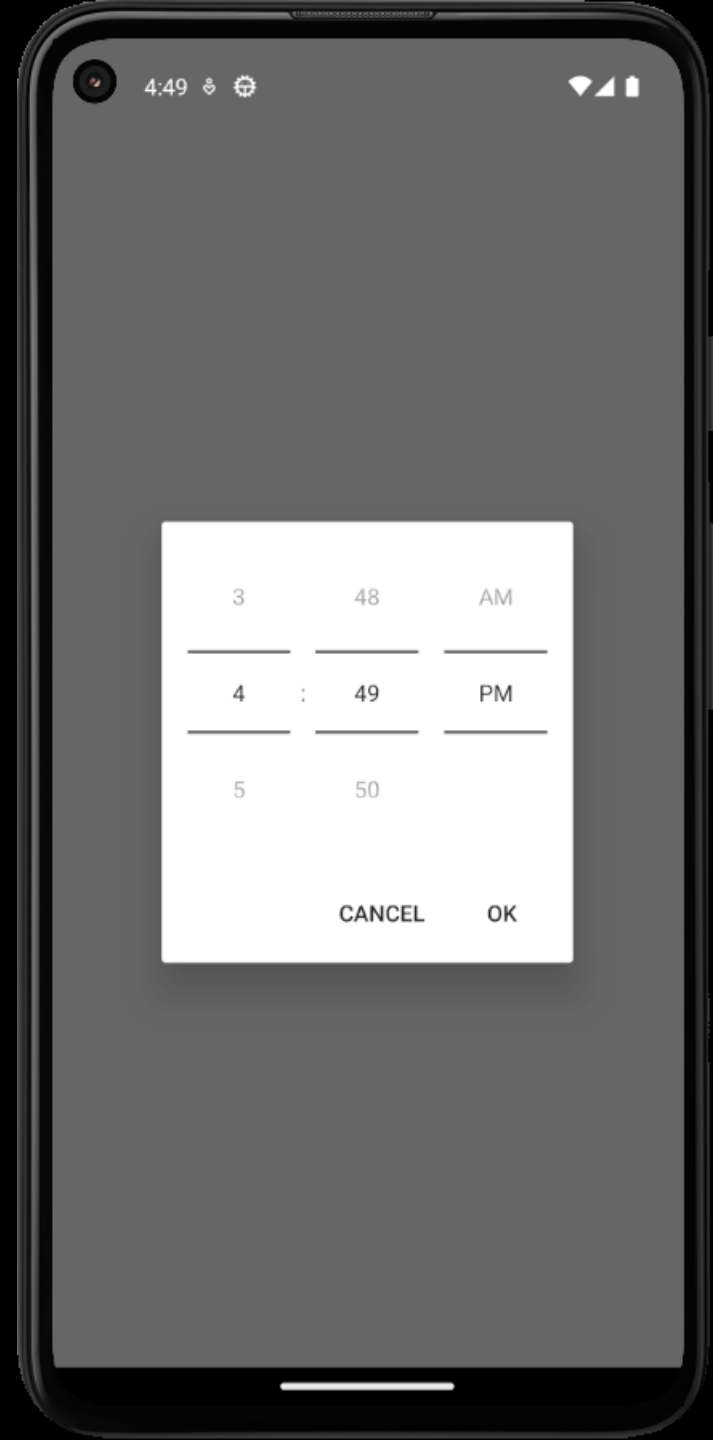


2

REACT NATIVE MODAL

- Is a pre-defined component that helps in creating the modal popup to React Native
- Is a basic way to present content above an enclosing view




SHOW MODAL VIEWS

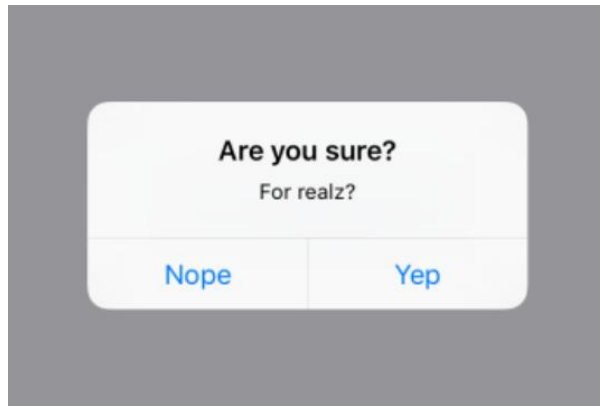

To get confirmation from
the user



Error confirmation

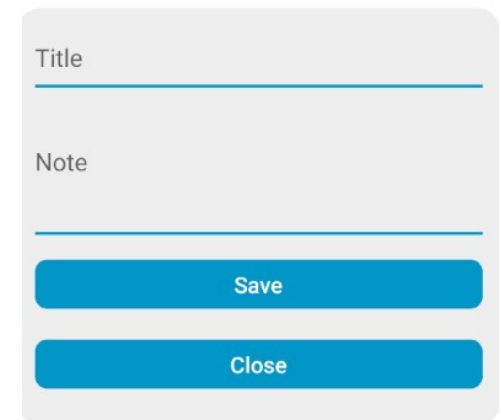A light gray modal dialog box with rounded corners. It has a "Title" label above a text input field. Below that is a "Note" label above a larger text area. At the bottom, there are two blue buttons: "Save" and "Close".

Get information from user

USING MODAL

```
import { Modal } from 'react-native';
```

➤ Props

Props	Type	Description
visible	bool	Determines whether your modal is visible
transparent	bool	Determines whether your modal will fill the entire view. Setting this to true will render the modal over a transparent background
animationType	enum('none', 'slide', 'fade')	Controls how the modal animates
onRequestClose		Callback is called when close modal

SAMPLE

10:26



Show Modal


```
const SimpleModal = () =>
{
  const [modalVisible, setModalVisible] = useState(false);

  return (
    <>
      <View style={styles.container}>
        <Pressable
          style={styles.btn}>

          <Text style={styles.btnText}>
            Show Modal</Text>
          </Pressable>
        </View>

        { /* Modal here */ }

      </>
    </>
  );
};
```



```
const SimpleModal = () =>
{
  const [modalVisible, setModalVisible] = useState(false);

  return (
    <>
      <View style={styles.container}>
        <Pressable
          style={styles.btn}
          onPress={() => setModalVisible(true)}>
          <Text style={styles.btnText}>
            Show Modal</Text>
          </Pressable>
        </View>

        {/* Modal here */}

      </>
    );
  };
};
```



```

<Modal>
  <View style={styles.modal}>
    <View style={styles.modalContainer}>
      <View style={styles.modalHeader}>
        <TouchableOpacity >

          <Entypo name="cross" color="#000" size={32}/>
        </TouchableOpacity>
      </View>
      <View style={styles.modalBody}>
        <Text style={styles.title}>Your title</Text>
        <Text style={styles.message}>
          This is message in modal</Text>
        </View>
      </View>
    </View>
  </Modal>

```



```

const styles = StyleSheet.create({
  modal: {
    flex: 1,
    backgroundColor: '#00000099',
    alignItems: 'center',
    justifyContent: 'center'
  },
  modalContainer: {
    width: '80%',
    borderRadius: 10,
  },
  modalBody: {
    backgroundColor: 'green',
  },
  modalHeader: {
    alignItems: 'flex-end',
    backgroundColor: 'yellow',
  },
  title: {
    fontSize: 24, fontWeight: '500',
    textAlign: 'center', marginBottom: 10
  },
  message: {
    textAlign: 'center', marginBottom: 10 }
});

```



```
<Modal
```

```
  animationType="slide"  
  transparent={true}  
  visible={modalVisible}  
  onRequestClose={() =>  
    {  
      setModalVisible(!modalVisible);  
    }}  
}>
```

```
  <View style={styles.modal}>
```

```
    <View style={styles.modalContainer}>
```

```
      <View style={styles.modalHeader}>
```

```
        <TouchableOpacity
```

```
          onPress={() => setModalVisible(false)} >
```

```
            <Entypo name="cross" color="#000" size={32}/>
```

```
          </TouchableOpacity>
```

```
        </View>
```

```
      <View style={styles.modalBody}>
```

```
        <Text style={styles.title}>Your title</Text>
```

```
        <Text style={styles.message}>
```

```
          This is message in modal</Text>
```

```
      </View>
```

```
    </View>
```

```
  </View> </Modal>
```

