




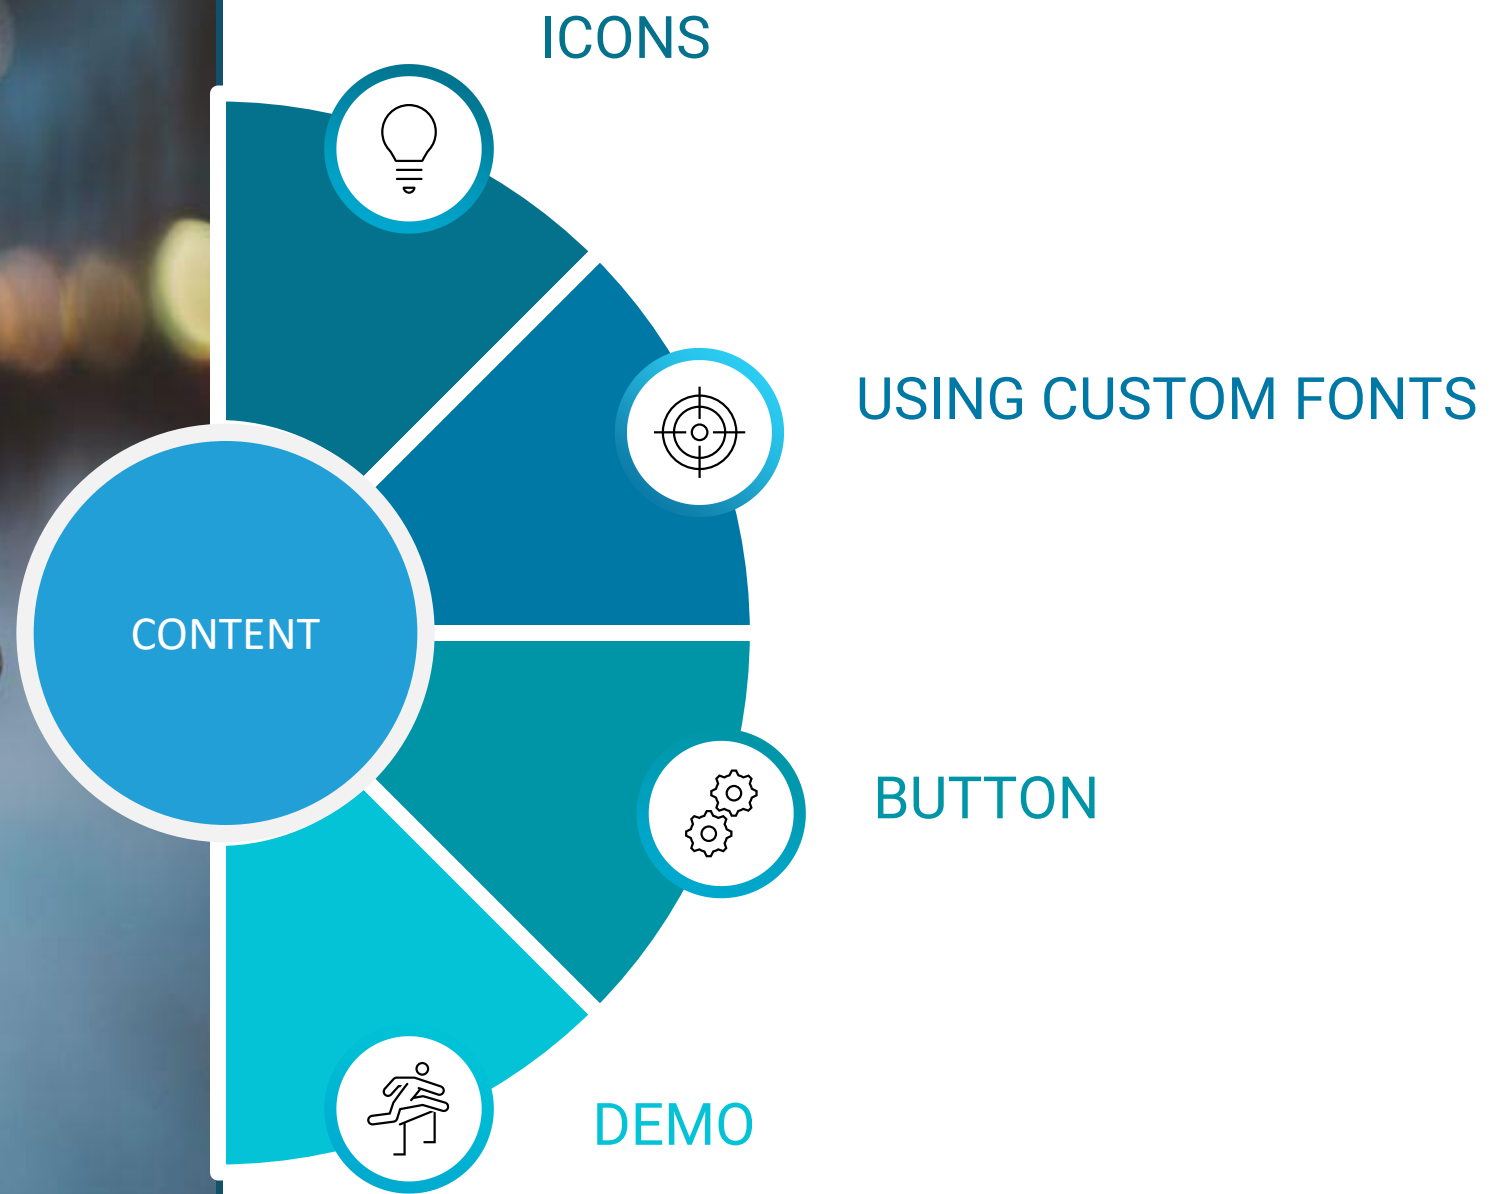

ICONS

Library

- **@expo/vector-icons** library is installed by default on the template project using **npx create-expo-app**
- Or **npm install --save react-native-vector-icons**
- <https://oblador.github.io/react-native-vector-icons/>

ICON FAMILIES

- **AntDesign**
- **Entypo**
- **EvilIcons**
- **Feather**
- **MaterialCommunityIcons**
- **FontAwesome**
- **Fontisto**
- **Foundation**
- **Ionicons**
- **MaterialIcons**

AntDesign



smileo



frown



calculator



chrome



github



iconfontdesktop



caretcircleup



upload



download



piechart



lock1



unlock



windowso



dotchart



barchart



codesquare



plussquare



minussquare



closesquare



closesquareo



checksquare



checksquareo



fastbackward



fastforward



upsquare



downsquare



leftsquare



rightsquare



rightsquareo



leftsquareo



down-square-o



up-square-o



play



playcircleo



tag



tago



addfile



folder1



file1



switcher



addfolder



folderopen



search1



ellipsis1



calendar



filetext1



copy1



jpgfile1



pdffile1



exclefile1



potfile1



unknowfile1



wordfile1



dinadina



dinadina-o



mobile1

Icons

						
accessibility	accessibility-outline	accessibility-sharp	add	add-circle	add-circle-outline	add-circle-sharp
						
add-outline	add-sharp	airplane	airplane-outline	airplane-sharp	alarm	alarm-outline
						
alarm-sharp	albums	albums-outline	albums-sharp	alert	alert-circle	alert-circle-outline
						
alert-circle-sharp	alert-outline	alert-sharp	american-football	american-football-outline	american-football-sharp	analytics
						
analytics-outline	analytics-sharp	aperture	aperture-outline	aperture-sharp	apps	apps-outline
						
apps-sharp	archive	archive-outline	archive-sharp	arrow-back	arrow-back-circle	arrow-back-circle-outline
						
arrow-back-circle-sharp	arrow-back-outline	arrow-back-sharp	arrow-down	arrow-down-circle	arrow-down-circle-outline	arrow-down-circle-sharp

FontAwesome

 glass	 music	 search	 envelope-o	 heart	 star	 star-o
 user	 film	 th-large	 th	 th-list	 check	 remove
 close	 times	 search-plus	 search-minus	 power-off	 signal	 gear
 cog	 trash-o	 home	 file-o	 clock-o	 road	 download
 arrow-circle-o-down	 arrow-circle-o-up	 inbox	 play-circle-o	 rotate-right	 repeat	 refresh
 list-alt	 lock	 flag	 headphones	 volume-off	 volume-down	 volume-up
 qrcode	 barcode	 tag	 tags	 book	 bookmark	 print
 camera	 font	 bold	 italic	 text-height	 text-width	 align-left


ICONS

➤ Props

- name
- color
- size

```
import FontAwesome from '@expo/vector-icons/FontAwesome'
import AntDesign from '@expo/vector-icons/AntDesign'
import Ionicons from '@expo/vector-icons/Ionicons'
```

```
const IconsDemo = () => {
  return (
    <View style={styles.container}>
      <FontAwesome color='red' size={64} name='home' />
      <Text style={styles.text}> FontAwesome </Text>
      <AntDesign color='red' size={64} name='home' />
      <Text style={styles.text}> AntDesign </Text>
      <Ionicons color='red' size={64} name='home' />
      <Text style={styles.text}> Ionicons </Text>
      <FontAwesome.Button
        name="facebook"
        backgroundColor="#3b5998"
        onPress={()=>{console.log('click')}}>
        Login with Facebook
      </FontAwesome.Button>
    </View>
  )
}
```

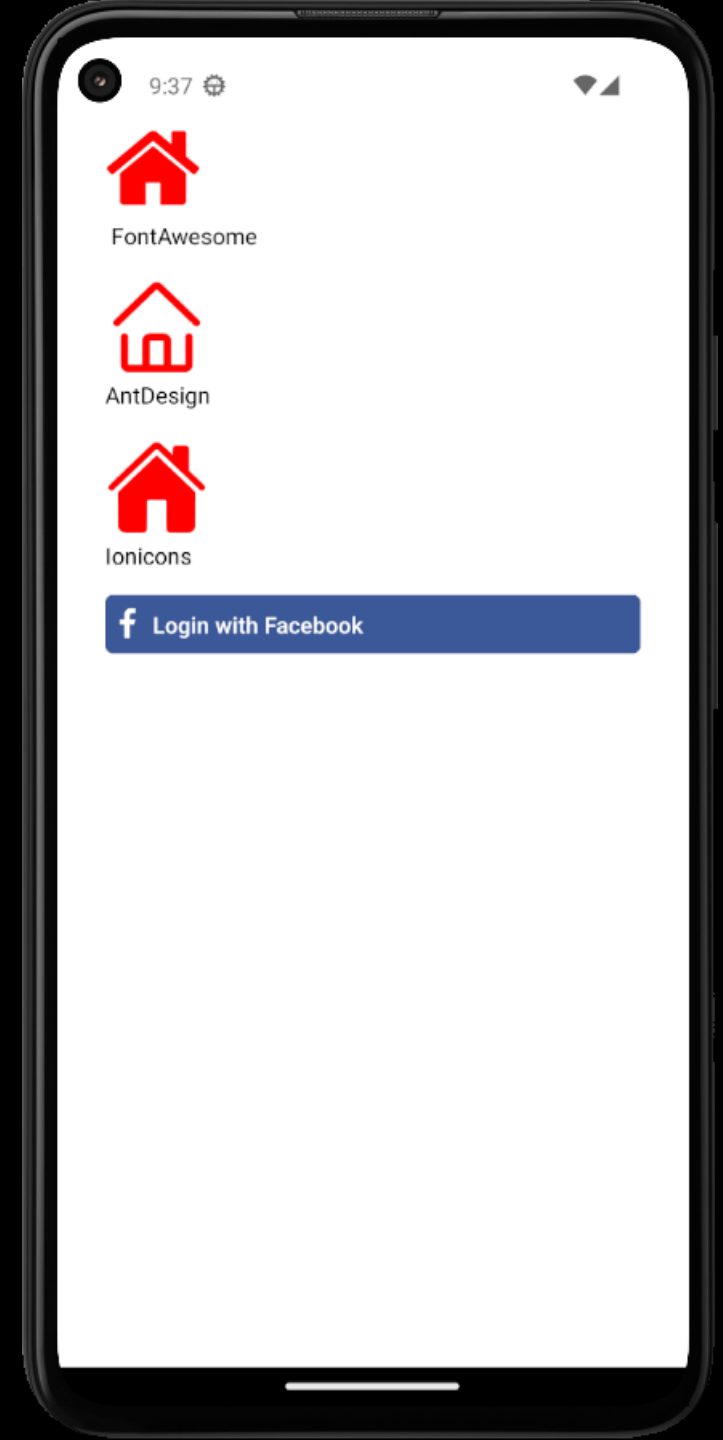


2

USING CUSTOM FONTS

CONFIG

- Download custom fonts
 - <https://fonts.google.com/?query=Lato>
- Create **assets/fonts** directory in your project
- Copy the font files that you downloaded to **assets/fonts** directory

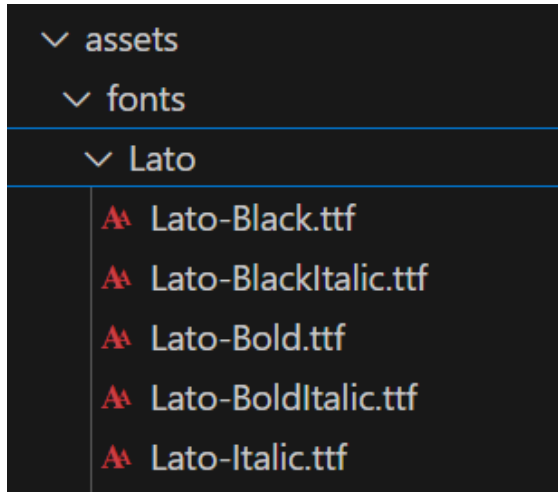

EXPO FONT

- Allows loading fonts from the web and using them in React Native components

- `npx expo install expo-font`

- Import library

```
import { useFonts } from 'expo-font';
```

SAMPLE

```

const UsingCustomFont = () => {

  const [fontsLoaded, fontError] =useFonts({
    "Lato-Regular":
      require("../assets/fonts/Lato/Lato-Regular.ttf"),
    "Lato-Bold":
      require("../assets/fonts/Lato/Lato-Bold.ttf"),
    "OpenSans_Condensed-Regular":
      require("../assets/fonts/Open_Sans/static/OpenSans_Condensed-Regular.ttf"),


  })

  if(!fontsLoaded && !fontError ){
    return null;
  }

  return (
    <View style={styles.container}>
      <Text style={styles.title}>Using Custom Font</Text>

      <Text style={{padding:15, fontFamily:'Lato-Regular', fontSize:30, color:
'red'}}>Hello world</Text>
      <Text style={{padding:15, fontFamily:'Lato-Bold', fontSize:30, color:
'red'}}>Hello world</Text>
      <Text style={{padding:15, fontFamily:'OpenSans_Condensed-Regular',
fontSize:30, color: 'red'}}>Hello world</Text>
    </View>
  )
}

```

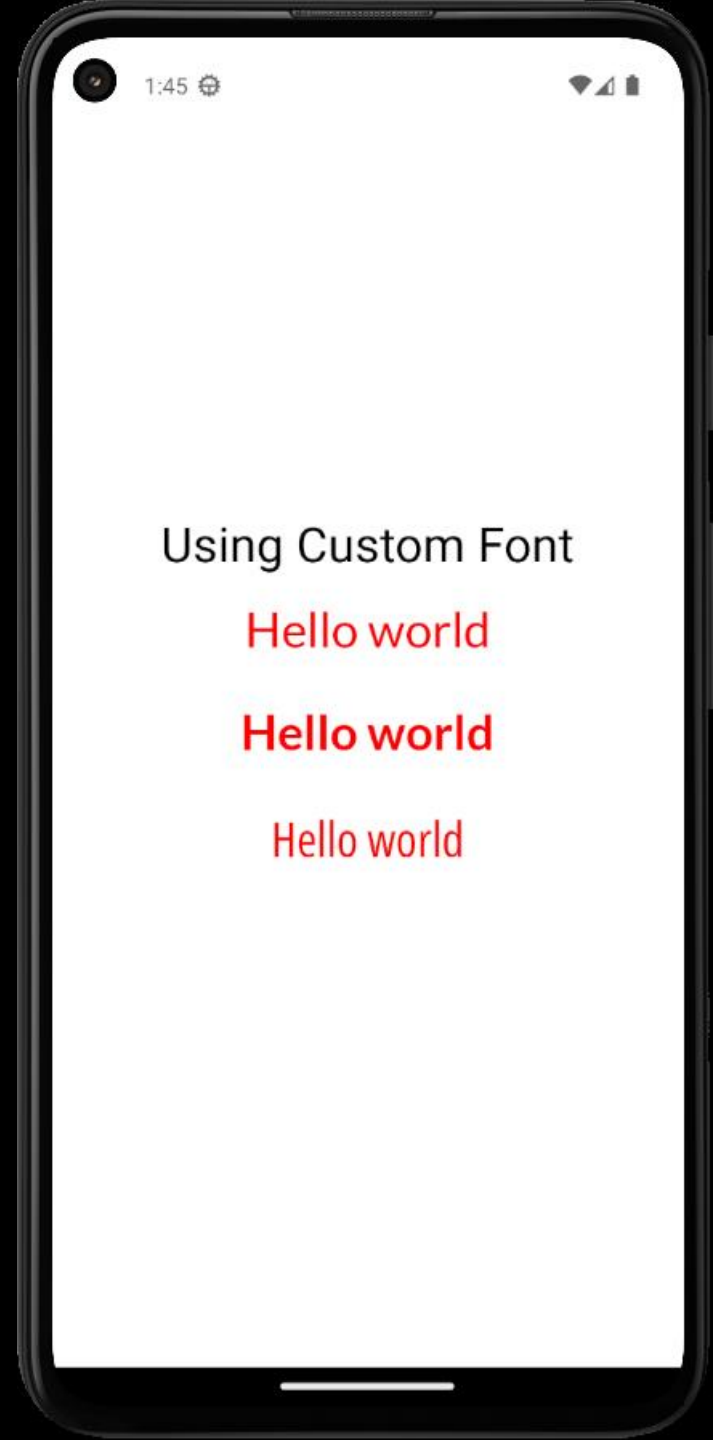

3

BUTTON


BASIC BUTTON

- Allow users to trigger actions
- Platform-specific rendering for iOS and Android


TYPE	DEFAULT
color	 '#2196F3' 
	 '#007AFF' 

- Props:
 - title
 - color
 - disabled
- Events:
 - onPress

```
const ButtonDemo = () => {  
  return (  
    <View style= {styles.container}>  
      <View style={styles.btn}>  
        <Button  
          title="Default Button"  
          onPress={()=>{alert("Button is clicked")}} />  
      </View>  
      <View style={styles.btn}>  
        <Button title="Red Button" color="red"/>  
      </View>  
    </View>  
  )  
}
```

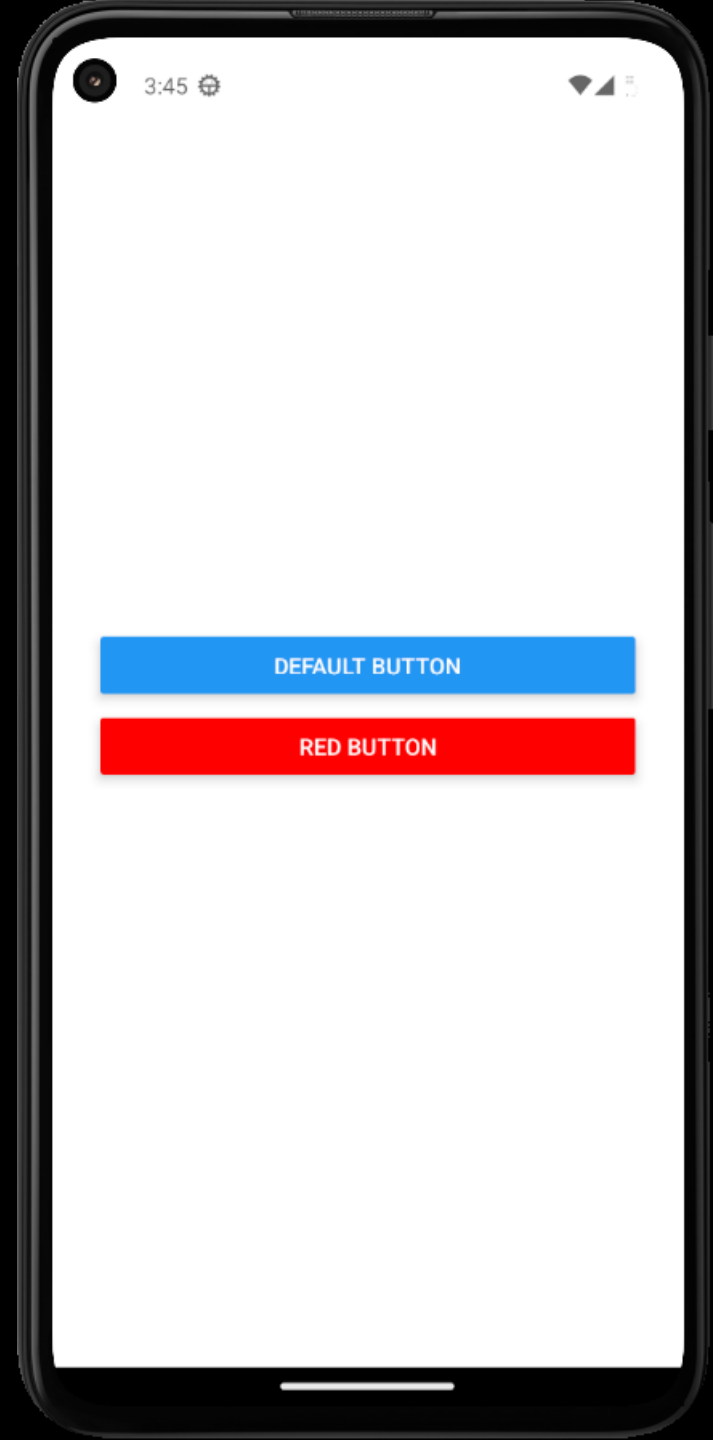


```
const ButtonDemo = () => {  
  return (  
    <View style={styles.container}>  
      <View style={styles.btn}>  
        <Button  
          title="Default Button"  
          onPress={()=>{alert("Button is clicked")}} />  
      </View>  
      <View style={styles.btn}>  
        <Button title="Red Button" color="red"/>  
      </View>  
    </View>  
  )  
}
```

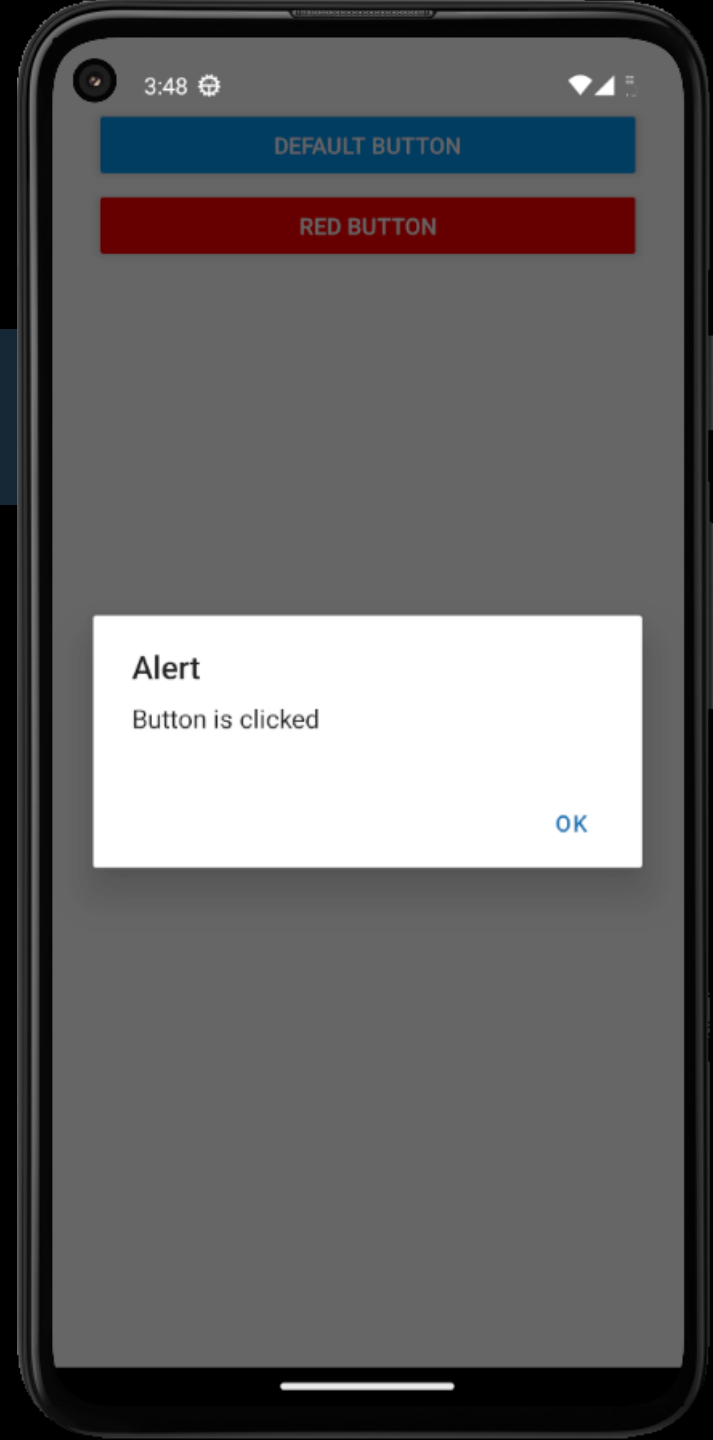

Touchable

- A wrapper for making views respond properly to touches
 - TouchableOpacity
 - TouchableWithoutFeedback
 - TouchableHighlight
 - TouchableNativeFeedback
- Events:
 - onPress
 - onLongPress

```
const TouchableOpacityDemo = () => {  
  return (  
    <View style={styles.container}>  
      <TouchableOpacity  
        style={styles.btn}  
        onPress={()=>{alert("Button is clicked")}}>  
        <Text style={styles.btnText}>  
          Button - TouchableOpacity  
        </Text>  
      </TouchableOpacity>  
    </View>  
  )  
}  
const styles = StyleSheet.create({  
  btn:{  
    backgroundColor: '#2196F3',  
    height: 40,  
    borderRadius: 20,  
    justifyContent:'center',  
    alignItems:'center'  },  
  btnText: {  
    color: '#FFF'    }  
});
```

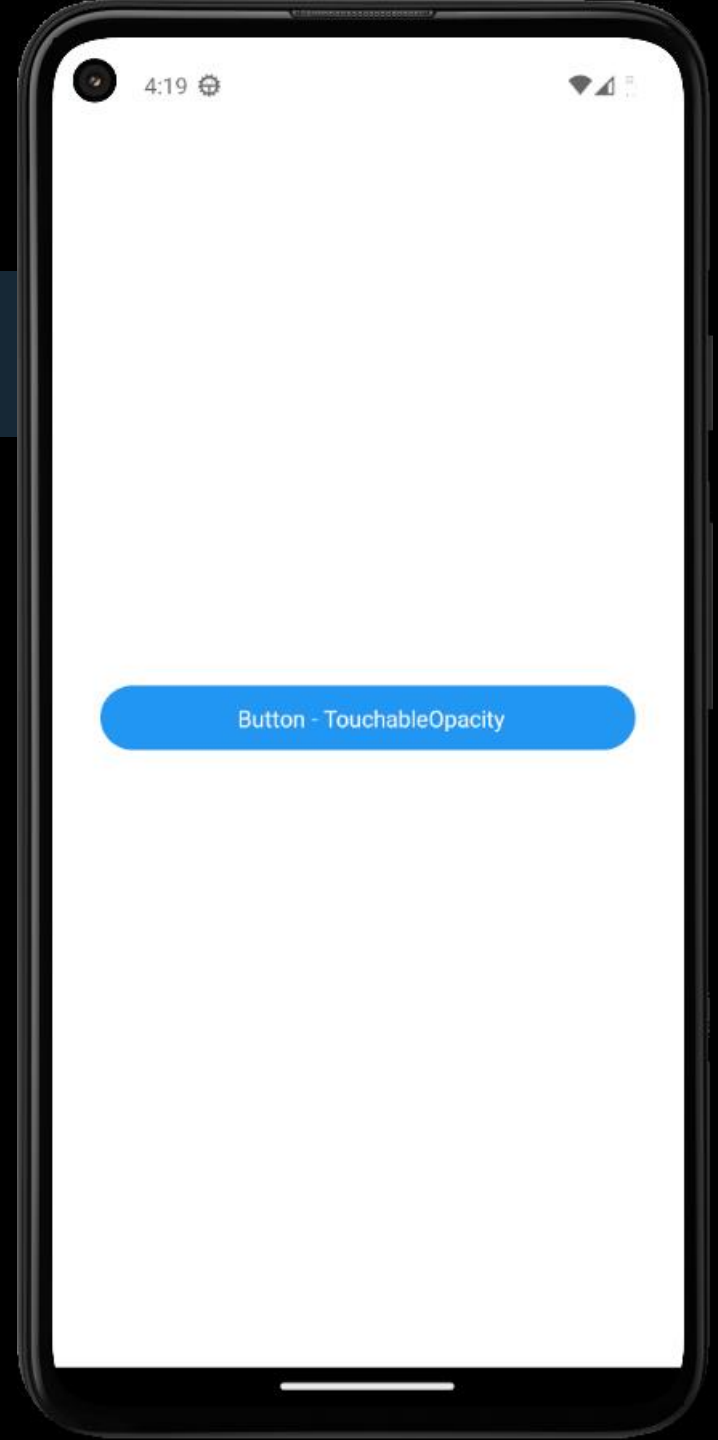


Pressable

- Is a Core Component wrapper that can detect various stages of press interactions on any of its defined children
- Create custom button

- Events:

- onPressIn
- onPressOut
- onHoverIn
- onHoverOut
- onPress
- onLongPress

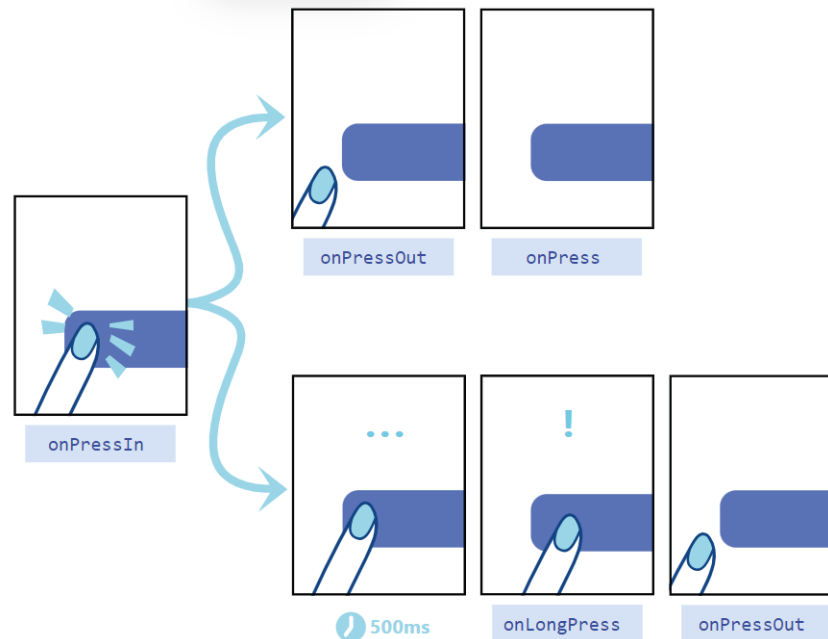

```

const PressableDemo = () => {
  return (
    <View style={styles.container}>
      <Pressable
        onPressIn={() => {console.log("press in")}}
        onPressOut={() => {console.log("press out")}} >
        <Image
          style={styles.img}
          source=
            {require('../assets/adaptive-icon.png')} />
        </Pressable>
        <Pressable
          style={styles.btn}
          onPress={() => {alert("Text is clicked")}}>
          <Text style={styles.btnText}> Pressable</Text>
        </Pressable>
      </View>
    )
  }
}

```

