
W3WI DS304 Applied Machine Learning Fundamentals

Exercise Sheet # 7 - Neural Networks / Deep Learning

Question 1 EX 2021 (Perceptron)

Under what circumstances does the *Perceptron* learning algorithm converge?

Question 2 EX 2020 (Number of network parameters)

You want to train a neural network on the *MNIST* data set to recognize hand-written digits. The images of 10 possible digits (the classes) have a resolution of 28×28 pixels.

The MLP (*multi-layer perceptron*) used for the task has two hidden layers with 64 and 32 units, respectively. Each layer has a constant bias input and the classes are one-hot encoded.

How many adjustable network parameters does the model have?

Question 3 EX 2020 (Neural networks for regression)

Your colleague suggests to use neural networks to solve a regression task. Which activation function would you have to use in the output layer of your network to achieve the desired result?

Question 4 EX 2021 (Activation functions)

Which statements regarding the activation functions of neural networks are correct?

- ☐ Activation functions should be non-linear.
- ☐ The *softmax* activation function is usually used in the output layer of a neural network.
- ☐ One problem of the *ReLU* function is the vanishing gradient.
- ☐ The *ReLU* activation is computed according to $\min(0, x)$.

Question 5 EX 2021, modified (Network architectures)

What types of neural network are usually applied to classify (a) images, and (b) sequences? Do some research and explain these types of networks.

Question 6 EX 2023, modified (Network training with gradient descent)

Your task is to train the neural network depicted in figure 1 using the *stochastic gradient descent* algorithm. The current training example is given by the vector $\mathbf{x} := (0 \ 1)^\top$. The label is one-hot encoded and given by $\mathbf{y} := (1 \ 0)^\top$.

Network architecture: The network consists of one hidden layer with *ReLU* activation as well as an output layer with *sigmoid* activation. For simplicity you decide to use the *least squares error* as the loss function (as shown in the lecture).

Compute the weight updates for all network parameters when applying the learning rate $\alpha := 0.5$.

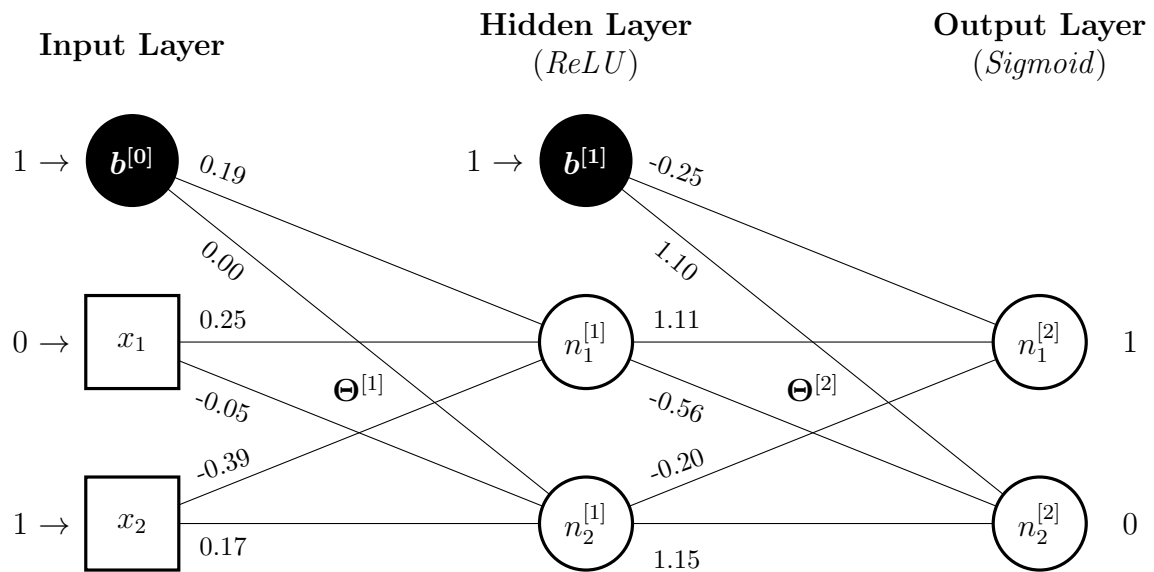


Figure 1: Visualization of the neural network used for the task above.