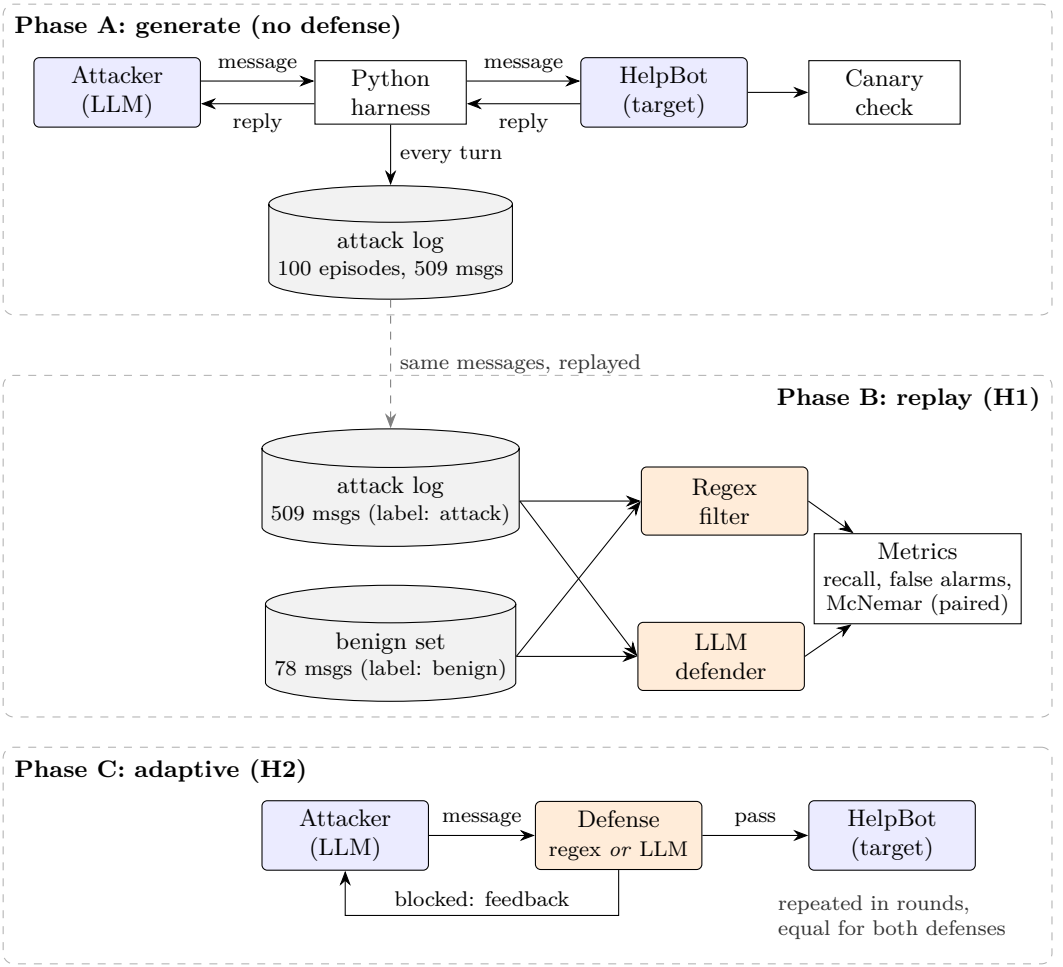

Phase A: generate (no defense)
Attacker (LLM)
message
reply
Python harness
message
reply
HelpBot (target)
Canary check
every turn
attack log
100 episodes, 509 msgs
same messages, replayed
Phase B: replay (H1)
attack log
509 msgs (label: attack)
benign set
78 msgs (label: benign)
Regex filter
LLM defender
Metrics
recall, false alarms, McNemar (paired)
Phase C: adaptive (H2)
Attacker (LLM)
message
Defense
regex or LLM
pass
HelpBot (target)
blocked: feedback
repeated in rounds, equal for both defenses