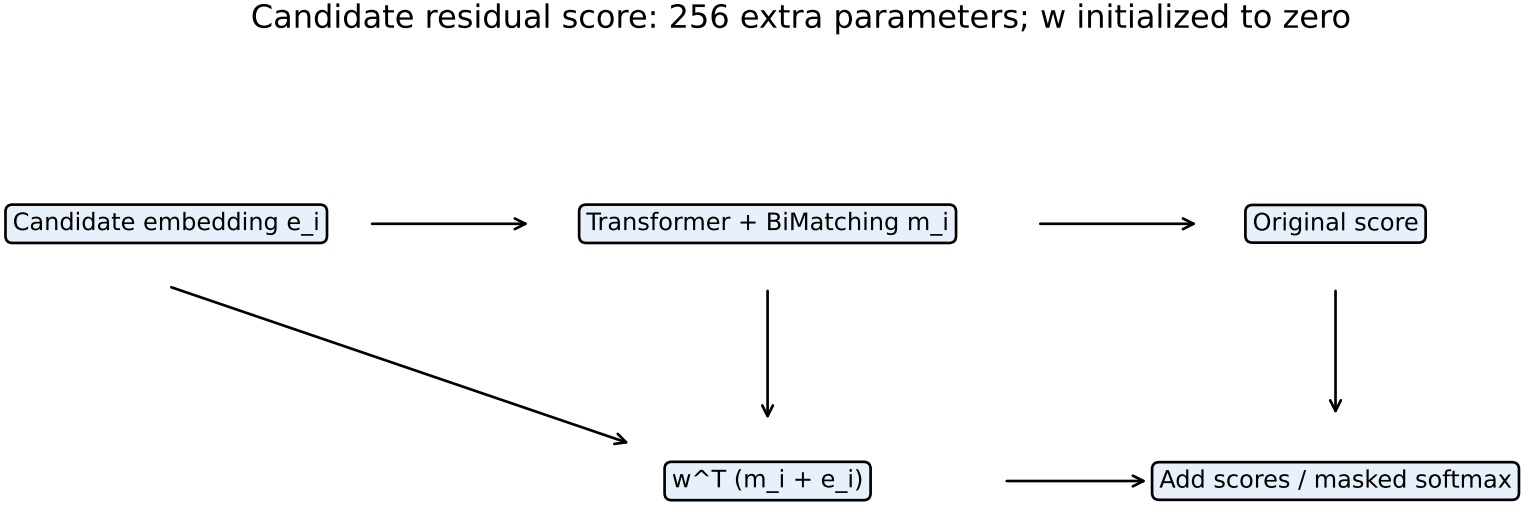
Candidate residual score: 256 extra parameters; w initialized to zero
Candidate embedding e_i
Transformer + BiMatching m_i
Original score
w^T (m_i + e_i)
Add scores / masked softmax