EXPERIMENT - 7

Simple Zoho Service Integration Using a Connection and API

Loan Application & Pre-Screening Management

Application Name	Loan Application & Pre-Screening Management
Form Name	Loan_Application_Form
Report Name	Loan_Application_Report
Student Name	DAKSHESH N
Student Roll No.	241401017
Experiment	7
Platform	Zoho Creator

Lab Record
Configure an authorized Zoho Mail connection and a minimal Deluge API function, then verify the safe dry-run path with a fictional acknowledgement payload.

Department of Computer Science and Engineering

Rajalakshmi Engineering College

1. Objective and Integration Design

To demonstrate how Zoho Creator uses an authorized connection in an invokeurl call to a Zoho Mail API endpoint. The minimal example prepares an acknowledgement for a mock loan application.

Setting	Saved configuration
Service / connection	Zoho Mail / Loan Mail Connection
Connection link	loan_mail_connection
Allowed action	Send Email; administrator authorization
State	Enabled; app access is ON for Loan Application & Pre-Screening Management.
Function	Loan_Mail_Demo(string mail_account_id, string sender_address, bool dry_run)
API operation	POST https://mail.zoho.in/api/accounts/{mail_account_id}/messages
Payload	fromAddress, toAddress, subject and content as JSON.
Execution model	Standalone function; not attached to the form workflow.

2. Procedure

1. Create the Zoho Mail connection with the Send Email action. Complete authorization manually in Zoho.

2. Enable the connection for this application after the account owner approves the app access grant.

3. Create Loan_Mail_Demo with account ID, sender address and a Boolean dry_run argument. Build a small JSON map.

4. Use the saved connection name in invokeurl. Retain a dry-run branch that prints an acknowledgement message without an API request.

5. Execute with MOCK_ACCOUNT, mock.sender@example.com and dry_run = true. Inspect the successful execution message.

Verification scope: authorization and app access are visibly enabled, and the function is saved. Dry-run success verifies the safe branch only. A successful Mail API response and delivered email have not been demonstrated.

241401017

3. Deluge Function

Saved function source. Line wrapping below is only document formatting; the connection stores authorization so credentials are not included in the script.

```
void Loan_Mail_Demo(string mail_account_id, string sender_address, bool dry_run)
{
    // Simple mock acknowledgement using the authorized Zoho Mail API.
    payload = Map();
    payload.put("fromAddress",sender_address);
    payload.put("toAddress","mock.loan1@example.com");
    payload.put("subject","Mock Loan Application Received");
    payload.put("content","Fictional model-exam application received for review. This is not a loan
    approval.");
    if(dry_run)
    {
        info "DRY RUN PASSED: mock acknowledgement prepared; no email sent.";
    }
    else
    {
        response = invokeurl
        [
            url :"https://mail.zoho.in/api/accounts/" + mail_account_id + "/messages"
            type :POST
            parameters:payload.toString()
            headers:{"Content-Type":"application/json"}
            detailed:true
            connection:"loan_mail_connection"
        ];
        info "Mail API HTTP status: " + response.get("responseCode");
        info response.get("responseText");
    }
}
```

Function Behaviour

dry_run = true prints the test message and skips invokeurl. dry_run = false enters the POST branch, using the supplied Mail account ID and sender. The detailed response is available for HTTP-status debugging.

The current recipient is mock.loan1@example.com. It is a fictional placeholder and cannot establish real delivery. Actual delivery requires a valid authorized Mail account, its sender address and an explicitly approved test recipient.

4. Connection Evidence

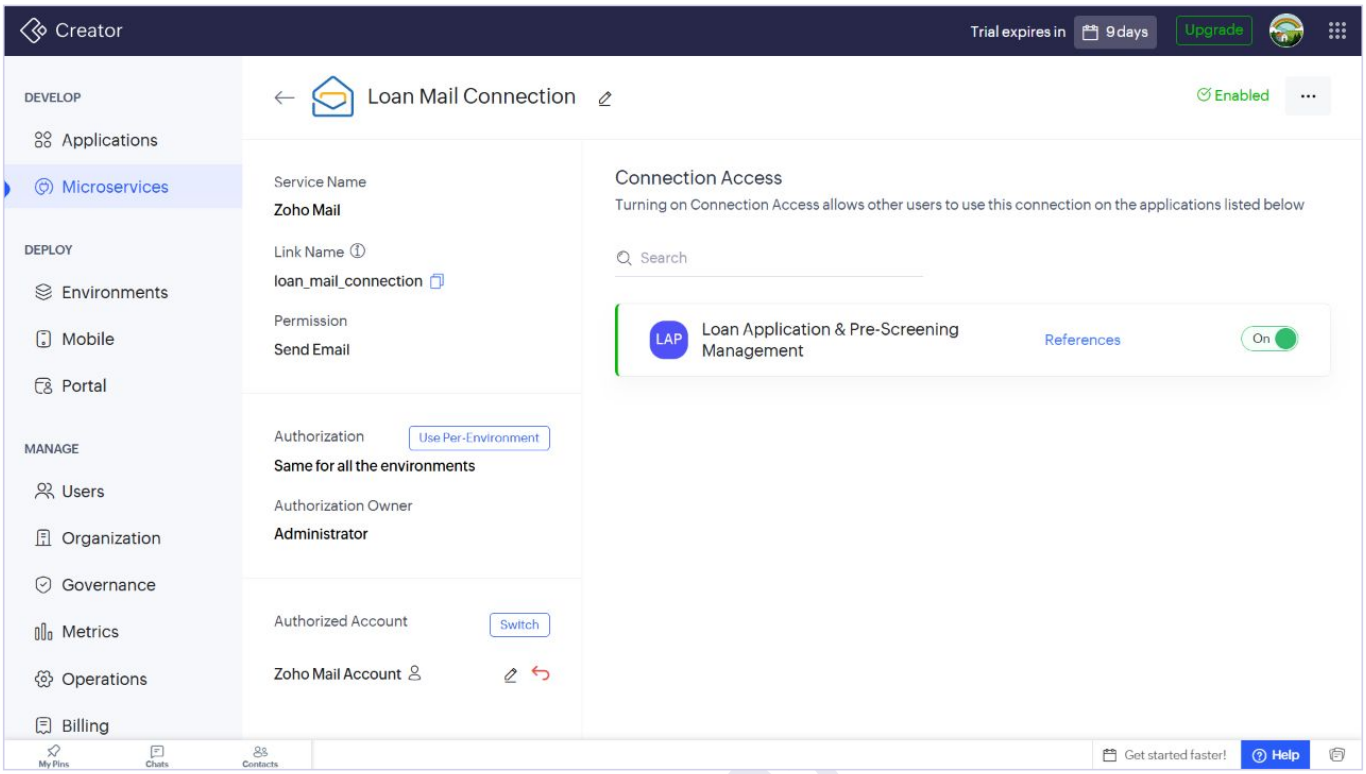


Figure 7.1 - Enabled Zoho Mail connection, Send Email action and application access ON.

What to Observe in the Model Exam

1. Show the connection name and link name, loan_mail_connection.

2. Point out the Send Email action and administrator authorization.

3. Show the app row with its enabled switch and References link.

4. Explain that authorization was completed by the account owner and that the function refers to the connection by name.

> Connection authorization and a saved reference are configuration evidence. They do not, by themselves, prove that a POST request succeeded or an email reached an inbox.

241401017

5. Function and Dry-Run Evidence

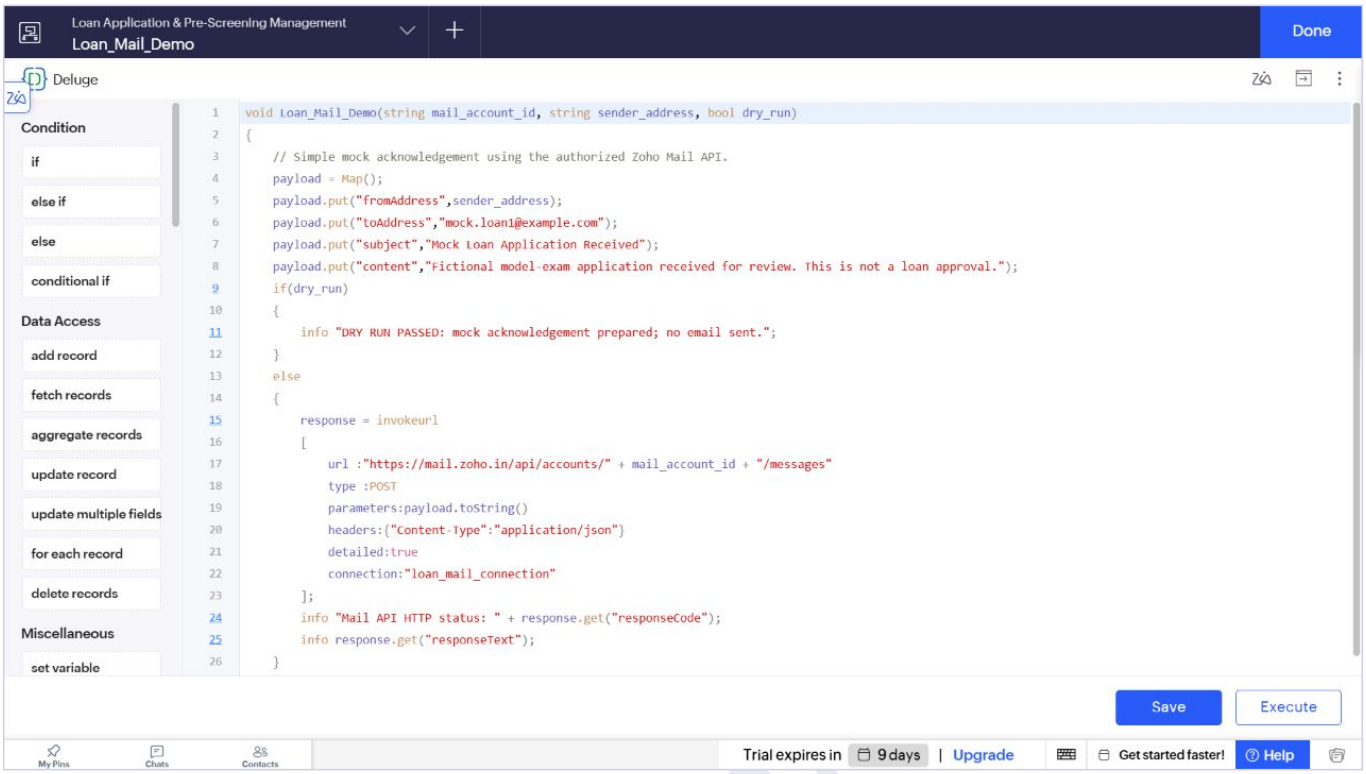


Figure 7.2 - Saved Loan_Mail_Demo function showing the JSON payload and connection-backed API call.

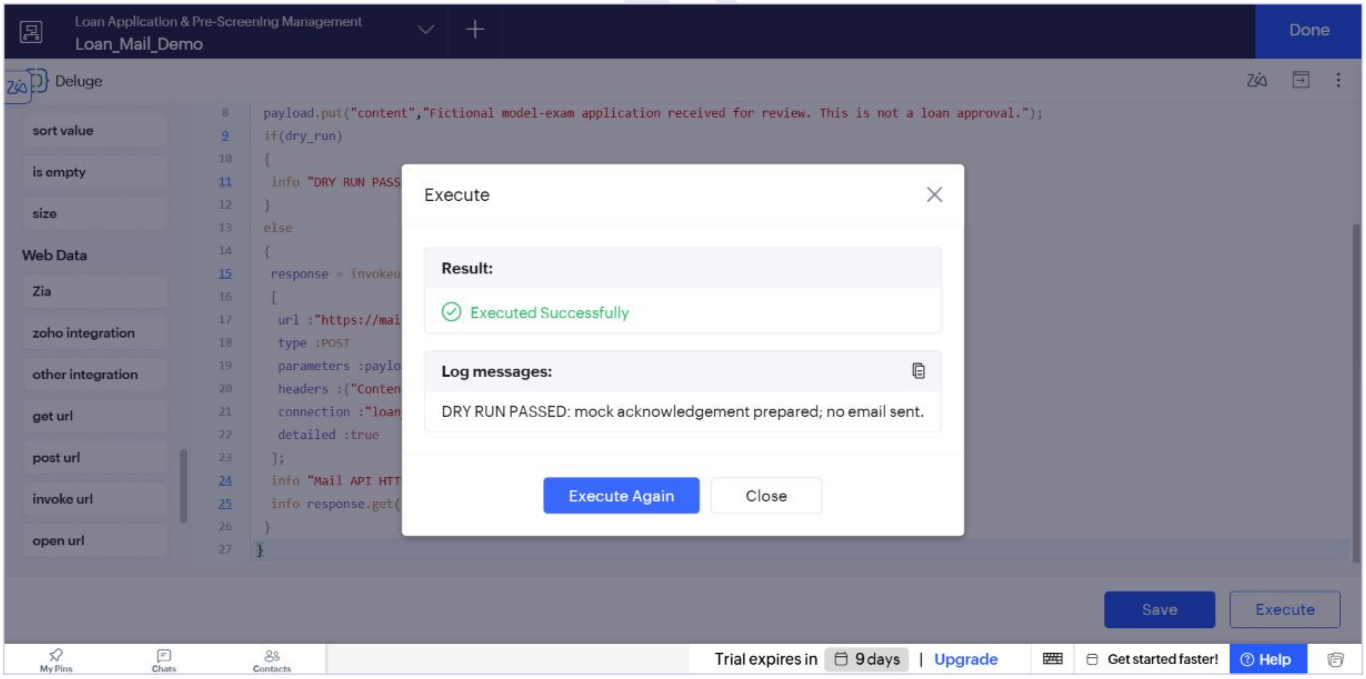


Figure 7.3 - Execution succeeded: DRY RUN PASSED; no email sent.

6. Testing, Debugging and Result

Check	Outcome
Connection enabled and app access on	Verified in connection settings.
Function saved	Saved successfully with the named connection.
Dry-run execution	Passed with fictional arguments; expected info message displayed.
Live POST / HTTP success	Not executed; no success code is claimed.
Inbox delivery	Not verified.
Form-triggered Mail API integration	Not configured; demonstration function remains standalone.

Debugging Note

An account-discovery request using GET /api/accounts encountered 401 INVALID_OAUTHSCOPE with the send-only authorization. The minimal implementation therefore accepts mail_account_id as an argument instead of broadening permissions to read account information. This does not prove that the live send branch will succeed; it must be checked separately.

7. Remaining Manual Verification

1. Obtain the valid Zoho Mail account ID and authorized sender through the account owner.

2. Choose and approve a real test inbox; update the fictional recipient only for that authorized delivery test.

3. Run with dry_run = false, inspect the returned HTTP status and response, and confirm arrival in the approved inbox. Record the result without exposing tokens or credentials.

8. Result and Learning Outcomes

The connection and API function are configured, and the dry-run path passed. Live delivery remains pending. The experiment demonstrates connection references, a JSON payload, POST structure, conditional testing and response-based debugging.

241401017