Adaptive Emotional Operating System and Method for Relationship Scoring and Guided Emotional Interventions

BACKGROUND OF THE INVENTION

[0001] Advances in affective computing, human–computer interaction, and ubiquitous sensing have enabled digital systems to detect, model, and respond to aspects of users' emotional states and social behaviors. Researchers and practitioners increasingly apply machine learning to multimodal data — including text, voice, facial expression, and behavioral signals — to infer mood, sentiment, and interpersonal dynamics for applications such as mental-health support, social networking, and personal assistants. Despite these capabilities, existing approaches often struggle with limited contextual awareness, cultural and individual variability in emotional expression, sparse or noisy sensor inputs, and trade-offs between personalization and user privacy. Additionally, many adaptive guidance systems focus on task completion or generalized recommendations rather than nuanced, longitudinal assessment of relationship quality and situational sanctuary needs, leaving gaps in continuity, interpretability, and ethically aligned decision making.

SUMMARY OF THE INVENTION

[0002] A computer-implemented emotional intelligence system for a relationship scoring platform ingests psychometric, behavioral, astrology, numerology and communication-style data and user responses to archetype, shadow, readiness and polarity questionnaires, then uses archetype, shadow-pattern, polarity and readiness engines to assign archetype and shadow identifiers, compute a readiness score on a bounded numerical scale from weighted answers with inconsistency penalties and polarity stabilizers, and compute a multi-dimensional compatibility score on a bounded scale by aggregating weighted sub-scores (including archetype match, shadow match, communication/conflict, love language/regulation, astrology and numerology) with applied inconsistency penalties and tier labeling; an adaptive Sanctuary subsystem acts as an emotional ecosystem that receives reflections, ritual logs, unsent messages and state selections, updates submodules (Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self, Alignment Compass), computes a Sanctuary stability score from sub-metrics (stillness consistency, mirror clarity, shadow neutrality, polarity balance, reflection depth, volatility, ritual participation, relationship alignment) and exerts a defined, bounded percentage influence on readiness and compatibility, while a relationship state engine maintains Relationship Tabs across stages (talking, friends, dating, long-term), updates status based on interaction data and scores, triggers context-specific prompts and joint rituals, and supports features such as CoupleSong progression with double consent; the system also computes polarity outputs (normalized masculine and feminine scores and a balance index) with visualizations and micro-reflections, derives multi-dimensional emotional signatures mapped to frequency fingerprints for personalized audio in Symphonic Match and Sanctuary, stores relational entities and explicit relationships in a data store, executes analytics for composite and longitudinal emotional profiles, and displays dynamic emotional guidance outputs (stillness prompts, emotional mirror prompts, unsent message prompts, polarity feedback), match suggestions, risk labels and other journey outputs to user devices.

[0003] In other aspects:

1. A computer-implemented method of operating an emotional intelligence system within a relationship scoring platform, the method comprising:

receiving, from a first user device, user response data associated with at least one of an archetype profile, a shadow pattern profile, a readiness questionnaire, a polarity questionnaire, and relationship status information;

processing the user response data to generate, by one or more processors, a readiness score on a bounded numerical scale based on weighted user answers, consistency penalties, and polarity stabilizers;

processing the user response data to generate, by the one or more processors, a compatibility score on a bounded numerical scale based on a plurality of weighted sub-scores comprising at least archetype match and shadow match;

operating, by the one or more processors, a Sanctuary subsystem configured as an adaptive emotional ecosystem that updates one or more Sanctuary internal metrics including at least a Sanctuary stability score based on emotional reflections and ritual activity of the first user;

adjusting at least one of the readiness score and the compatibility score based on the Sanctuary internal metrics so that Sanctuary activity contributes a bounded percentage influence to the at least one of the readiness score and the compatibility score;

causing a user interface on the first user device to display at least one emotional guidance output selected from stillness prompts, emotional mirror prompts, unsent message prompts, and polarity feedback, the emotional guidance output being dynamically selected based on at least one of the readiness score, the compatibility score, a polarity balance index, and the Sanctuary internal metrics.

2. The method of claim 1, wherein generating the readiness score comprises normalizing a sum of weighted answers to a readiness questionnaire by a number of readiness questions to produce a value between 0 and 100.

3. The method of claim 1, wherein generating the compatibility score comprises combining component sub-scores including at least a communication and conflict pattern sub-score, a love language and regulation strategy sub-score, an astrology sub-score, and a numerology sub-score, each having an assigned weighting.

4. The method of claim 1, wherein operating the Sanctuary subsystem comprises executing a Stillness Mode that, when used at least a threshold number of times within a time window, increases the readiness score by a defined increment and decreases a shadow activation metric.

5. The method of claim 1, wherein operating the Sanctuary subsystem comprises executing an Emotional Mirror module that analyzes emotional themes, attachment signals, and tension patterns in user reflections and updates at least one of the Sanctuary stability score and a curtain stability score.

6. The method of claim 1, wherein operating the Sanctuary subsystem comprises executing a Whisper Window module that ingests unsent emotional messages and, responsive to processing the messages, reduces a compatibility penalty component and increases an emotional honesty metric associated with the first user.

7. The method of claim 1, wherein operating the Sanctuary subsystem comprises executing a Ghost Mode that tracks avoidance or withdrawal behavior and, when overused beyond a usage threshold, applies a negative adjustment to the compatibility score while applying a stabilizing adjustment to a polarity metric.

8. The method of claim 1, wherein the Sanctuary internal metrics comprise the Sanctuary stability score on a bounded numerical scale computed from sub-metrics including stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment.

9. The method of claim 1, wherein adjusting the at least one of the readiness score and the compatibility score based on the Sanctuary internal metrics comprises applying a first bounded influence to the readiness score and a second bounded influence to the compatibility score when the Sanctuary stability score exceeds one or more thresholds.

10. The method of claim 1, further comprising computing a polarity balance index from normalized masculine energy scores and feminine energy scores derived from polarity questionnaire responses, and using the polarity balance index as an input to at least one of the Sanctuary subsystem and the compatibility score.

11. The method of claim 10, wherein the Sanctuary subsystem modifies polarity outputs by adjusting the polarity balance index responsive to Sanctuary activities including stillness sessions, reflection logs, and Last Light interactions.

12. The method of claim 1, further comprising assigning the first user to an archetype selected from a predefined set of archetypes and using the archetype as an input to both the compatibility score and the Sanctuary subsystem behavior.

13. The method of claim 12, wherein the archetype is combined with a shadow pattern type selected from a predefined set of shadow patterns to generate behavioral warnings and Sanctuary emotional prompts targeted to the first user.

14. The method of claim 1, wherein operating the Sanctuary subsystem further comprises maintaining an Archive of Self that stores emotional logs, rituals, and reflection entries and periodically deriving readiness score adjustments from patterns in the Archive of Self.

15. The method of claim 1, wherein operating the Sanctuary subsystem further comprises an Alignment Compass module that classifies a current state of the first user into one of multiple alignment quadrants including at least Connected, Guarded, Hopeful, and Drained, and applies readiness and compatibility adjustments based on state transitions.

16. The method of claim 1, wherein the user interface further displays a Relationship Tab indicating a relationship status for the first user, and wherein transitions between Relationship Tab statuses trigger Sanctuary joint rituals and updated emotional prompts.

17. The method of claim 16, further comprising computing a joint Sanctuary influence for a pair of users sharing a Relationship Tab, the joint Sanctuary influence contributing a bounded compatibility increase when both users complete defined shared rituals.

18. The method of claim 1, further comprising generating, for a pair of matched users, an evolving shared song having plural stages, wherein progression between stages is gated by at least one of Sanctuary ritual completion, Relationship Tab updates, and joint reflections generated through the Sanctuary subsystem.

19. The method of claim 18, wherein generating the evolving shared song further comprises producing a personalized tone palette and frequency fingerprint based on at least an archetype, a shadow pattern, polarity scores, and emotional logs, and using the personalized tone palette to select or modify song versions.

20. The method of claim 1, wherein the emotional guidance output further comprises a truth signal message generated as a concise insight derived from recent reflections, polarity trends, and shadow pattern activity, and displayed to prompt targeted emotional regulation by the first user.

21. A computer-implemented method of operating an emotional operating system for relationship analytics, the method comprising:

ingesting, from a user device, psychometric responses, behavioral pattern data, astrology data, numerology data, and communication style indicators for a first user;

processing, by one or more processors, the ingested data using an archetype engine, a shadow pattern engine, a polarity engine, and a readiness scoring engine to generate at least a readiness score on a bounded numerical scale and an archetype identification for the first user; and

generating, by a compatibility engine, a compatibility score for pairing the first user with other users on a bounded compatibility scale based on weighted contributions of at least archetype match and shadow match;

updating, by a relationship state engine, relationship journey outputs including at least one of a match suggestion, a risk label, and an emotional guidance prompt based on the readiness score and the compatibility score.

22. A computer-implemented method for calculating a multi-dimensional compatibility score, the method comprising:

receiving, for a pair of users, input data including archetype identifiers, shadow pattern types, communication and conflict style indicators, love language and regulation strategy selections, astrology parameters, and numerology parameters;

computing, by one or more processors, a plurality of sub-scores comprising at least an archetype match sub-score, a shadow match sub-score, a communication and conflict sub-score, a love language regulation sub-score, an astrology sub-score, and a numerology sub-score;

applying predefined weightings to the plurality of sub-scores and applying inconsistency penalties responsive to detected contradictions in the input data;

aggregating the weighted sub-scores and penalties to generate a compatibility score within a specified numerical range;

causing display of the compatibility score and an associated tier label on at least one user device.

23. A computer-implemented method for computing an emotional readiness score, the method comprising:

providing, to a first user device, a readiness questionnaire comprising multiple questions configured to assess emotional regulation and relational preparedness;

receiving, from the first user device, weighted user answers to the readiness questionnaire;

detecting, by one or more processors, inconsistency clusters and contradiction flags within the user answers;

calculating a raw readiness sum from the weighted user answers, applying penalties based on the inconsistency clusters and contradiction flags, and normalizing by a number of questions to produce a readiness score on a bounded 0–100 scale;

storing the readiness score in a user profile for use in subsequent matching and emotional guidance operations.

24. A computer-implemented method for emotional archetype and shadow modeling, the method comprising:

collecting, from a first user, answer data to an archetype and shadow assessment including emotional patterns, behavioral tendencies, and regulation indicators;

processing the answer data using an archetype engine that clusters responses into a predefined set of archetype types to assign an archetype identifier and generate a behavioral prediction vector and consistency flags;

processing at least a subset of the answer data using a shadow pattern engine to classify the first user into one of multiple shadow pattern types representing self-sabotage tendencies;

storing the archetype identifier and the shadow pattern type in association with the first user for use in compatibility scoring, Sanctuary prompts, and behavioral warnings.

25. A computer-implemented method for emotional polarity assessment, the method comprising:

transmitting, to a user device, a polarity questionnaire comprising multiple items configured to measure masculine energy, feminine energy, and comfort with relational presence and absence;

receiving, from the user device, response data to the polarity questionnaire;

computing, by one or more processors, a normalized masculine score, a normalized feminine score, and a polarity balance index based on the response data;

updating a user profile for the user with the masculine score, the feminine score, and the polarity balance index as current polarity outputs;

providing, via a user interface, at least one polarity visualization and micro-reflection prompt based on the polarity balance index.6. Sanctuary emotional reflection engine;

26. A computer-implemented method for operating an adaptive emotional reflection engine, the method comprising:;

receiving, from a user device, emotional reflections, ritual completion logs, unsent message contents, and emotional state selections generated within a Sanctuary interface;

updating, by one or more processors, Sanctuary sub-modules including at least a Stillness Mode module, an Emotional Mirror module, a Whisper Window module, a Ghost Mode module, an Archive of Self module, and an Alignment Compass module based on the received inputs;

computing a Sanctuary stability score on a bounded scale from sub-metrics including stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment;

adjusting at least one of a readiness score and a compatibility score associated with the user based on the Sanctuary stability score so that Sanctuary behavior exerts a defined bounded influence on relationship analytics.

26. A computer-implemented method of managing relationship state progression, the method comprising:

maintaining, for each pair of users, a Relationship Tab storing a current relationship status selected from multiple predefined stages including at least talking, friends, dating, and long-term intentions;

receiving, from at least one user device, interaction data including communication frequency, Sanctuary joint ritual participation, and explicit user selections indicative of relationship progression;

updating, by a relationship state engine, the Relationship Tab to transition between the predefined stages based on the interaction data and at least one of a readiness score and a compatibility score for the pair of users;

triggering context-specific emotional prompts and Sanctuary joint rituals responsive to each transition in the Relationship Tab.

27. A computer-implemented method for generating evolving couple-based media, the method comprising :

creating, for a pair of users, a CoupleSong record linked to a SongMaster and multiple SongVersions corresponding to respective stages of relationship progression;

receiving double consent signals from both users authorizing activation of a Symphonic Match feature;

setting an initial song stage for the CoupleSong and providing playback of a SongVersion corresponding to the initial stage on each user device;

advancing the song stage in response to at least one of elapsed time, Sanctuary ritual completion, and Relationship Tab status transitions, while enforcing a stage progression model;

updating the SongVersion played to the users based on the advanced song stage to reflect evolution of the relationship.

28. A computer-implemented method for generating an emotional frequency fingerprint, the method comprising:

collecting, for a first user, input data comprising at least an archetype identifier, a shadow pattern type, polarity scores, astrology parameters, numerology parameters, emotional logs, and regulation strategy selections; and

processing, by one or more processors, the input data to derive a multi-dimensional emotional signature;

mapping the emotional signature to a frequency fingerprint comprising a personalized tone palette including at least one of sacral, heart, and mind frequency themes;

using the frequency fingerprint to select or modulate audio content in at least one of a Symphonic Match system and a Sanctuary system for the first user.

29. A computer-implemented method for managing relational emotional analytics data, the method comprising:

storing, in a data store, relational entities including user records, user answer records, readiness scores, polarity session records, archetype profiles, shadow signals, relationship tab records, couple song records, compatibility scores, and Sanctuary log entries;

maintaining, by one or more processors, explicit data relationships linking the relational entities to reflect emotional states, interactions, and relationship journeys of users over time;

executing analytics queries over the relational entities and data relationships to derive composite emotional profiles and longitudinal evolution metrics for users and couples;

outputting, to at least one user interface or reporting interface, insights derived from the composite emotional profiles and evolution metrics for use in personalized guidance and feature triggering within the emotional operating system.

1. A computer-implemented method for generating and applying emotionally-informed guidance, comprising:

ingesting, via one or more interfaces, psychometric responses, behavioral patterns, astrology parameters, numerology parameters, communication indicators, conflict style indicators, love language selections, regulation strategy selections, emotional reflections, polarity questionnaire responses, shadow indicators, archetype responses, and relationship status inputs;

processing the inputs across a plurality of coordinated engines including an archetype engine, a shadow engine, a readiness engine, a compatibility engine, a polarity engine, a Sanctuary reflection engine, a relationship state engine, a frequency fingerprint engine, a simulation scoring module, and a composite profile engine;

generating, by the coordinated engines, bounded emotional sub-scores and a composite emotional profile;

updating a stored user emotional state by applying a closed feedback loop that adjusts engine parameters based on recent reflections and outcomes; and

outputting emotionally-informed content including emotional guidance, evolving media selections, relationship prompts, simulation scores, and Sanctuary insights for presentation to a user device.

2. The method of claim 1, wherein the compatibility engine computes a multi-dimensional compatibility score for a user pair by generating sub-scores including archetype match, shadow match, communication style alignment, conflict style alignment, love language alignment, regulation strategy alignment, astrology alignment, numerology alignment, polarity alignment, and emotional stability, applying predefined weightings and contradiction penalties, aggregating into a bounded score, and assigning a tier label.

3. The method of claim 1, wherein the readiness engine receives readiness questionnaire answers, assigns weighted values, detects inconsistency clusters, subtracts penalties, normalizes to a bounded scale, and stores a readiness score in a relational data model for analytics and emotional prompting.

4. The method of claim 1, wherein the archetype engine processes emotional pattern data, clusters responses into archetype types, generates prediction vectors and consistency flags, and stores archetype identifiers for use in compatibility, Sanctuary prompting, and reflection logic.

5. The method of claim 1, wherein the shadow engine receives sabotage-related responses, classifies shadow pattern types including manipulator, stonewaller, love bomber, chameleon, scorekeeper, and self-saboteur, generates volatility and activation metrics, and influences compatibility, readiness, and reflection logic.

6. The method of claim 1, wherein the polarity engine generates masculine and feminine scores from questionnaire responses, computes a polarity balance index, stores polarity outputs, and influences compatibility, readiness, and Sanctuary behavior.

7. The method of claim 1, wherein the Sanctuary reflection engine includes subsystems comprising Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Alignment Compass, Archive of Self, Mirror Matches, Truth Signal, and Last Light, computes sub-metrics including stillness consistency, emotional clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and alignment state, and produces a Sanctuary stability score applied as a bounded influence on readiness and compatibility.

8. The method of claim 1, wherein the relationship state engine stores ordered relationship stages including Talking, Friends, Dating, Maybe Something, Long Term, and Marriage Seeking, receives

transition signals, updates a current stage, triggers Sanctuary rituals and relational prompts, and modifies compatibility scoring according to stage.

9. The method of claim 1, further comprising receiving double consent signals to unlock a CoupleSong record, selecting stage-specific Song Versions tied to the relationship stage, advancing song stages based on elapsed time, Sanctuary behavior, and relationship transitions, generating evolving media outputs, and modulating audio using frequency fingerprints.

10. The method of claim 1, wherein the frequency fingerprint engine receives archetype identifiers, shadow pattern types, polarity outputs, astrology parameters, numerology parameters, emotional logs, and regulation strategies, generates multi-dimensional emotional signatures, maps the signatures to tone palettes, and influences Symphonic Match selection and Sanctuary audio.

11. The method of claim 1, further comprising applying the engines to a fictional profile, celebrity template, or non-user entity to produce a simulated compatibility score and presenting a tier label and associated emotional insight.

12. The method of claim 1, wherein the composite profile engine combines archetype, shadow, polarity, zodiac, energy type, subtype, readiness, and Sanctuary metrics to generate a composite emotional profile used for analytics, prompting, and relationship progression predictions.

13. The method of claim 1, further comprising assigning an energy type selected from Protector, Nurturer, or Blended, assigning an energy subtype and microtype, storing the assignments, and influencing compatibility and Sanctuary guidance accordingly.

14. The method of claim 1, further comprising detecting emotional contradictions across multiple questionnaires, generating contradiction clusters, applying penalties to readiness and compatibility scores, and storing contradiction logs for longitudinal analytics.

15. The method of claim 1, further comprising evaluating compatibility tiers to control messaging access by allowing direct messaging above a threshold, requiring a Knock request below the threshold, restricting access based on emotional readiness, and logging relational intent signals.

16. The method of claim 1, further comprising collecting quarterly rescoring data, computing deltas in sub-scores and composite profiles, tracking archetype and shadow evolution, storing longitudinal emotional metrics, and generating visualizations of emotional growth.

17. The method of claim 1, wherein an alignment compass classifies a user's emotional state into quadrants including Connected, Guarded, Hopeful, and Drained, updates the classification based on Sanctuary logs, and applies bounded adjustments to at least one of the readiness or compatibility scores.

18. The method of claim 1, further comprising generating daily or periodic mirror matches based on archetype, shadow, polarity, readiness, and Sanctuary metrics and providing emotional reflections as outputs in lieu of match suggestions.

19. The method of claim 1, wherein a Last Light engine receives legacy-themed emotional reflections, updates shadow activation and polarity balance metrics, and generates transformative emotional prompts stored to guide subsequent Sanctuary interactions.

20. The method of claim 1, wherein a Truth Signal engine generates short emotional insights based on recent reflections, shadow activity, and polarity trends and schedules micro-messages according to a user's engagement cadence.

21. The method of claim 1, further comprising maintaining, in a relational emotional analytics model, entities including user profiles, answer records, archetype profiles, shadow records, readiness scores, polarity sessions, compatibility scores, Sanctuary logs, contradiction logs, relationship tabs,

simulation scores, growth tracker entries, couple song records, and evolution logs with explicit relationships enabling analytics, predictions, longitudinal tracking, and emotional evolution metrics.

[0004] Advantages of one implementation may include one or more of the following:

- Enhanced contextual awareness through multimodal fusion of psychometric, behavioral, communication-style, astrological/numerological and user-entered data, improving robustness where single-modality signals are sparse or noisy.

- More nuanced, multidimensional compatibility assessment by aggregating interpretable, weighted sub-scores (archetype match, shadow match, communication/conflict, love language/regulation, astrology/numerology, etc.), producing a single bounded compatibility value while preserving traceable subcomponents.

- Increased personalization via archetype, shadow-pattern, polarity and readiness engines that adapt scoring to individual response profiles and interaction histories rather than relying on one-size-fits-all heuristics.

- Stability and noise mitigation through inconsistency penalties, polarity stabilizers, and bounded numerical scales, yielding smoother, more predictable outputs and reducing sensitivity to outlier responses.

- Longitudinal continuity and early-warning capability by maintaining time-series relationship Tabs and composite analytics that surface trends, shifts in readiness/compatibility, and changes in emotional signature over time.

- An adaptive Sanctuary subsystem that supports in-situ emotional regulation and reflective practice (Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self,

Alignment Compass), enabling ongoing, context-aware micro-interventions rather than only discrete recommendations.

- Bounded, explicit influence of Sanctuary state on readiness and compatibility (defined percentage caps), which preserves interpretability and prevents single transient events from dominating longer-term scores.

- Explainability and user interpretability through sub-score breakdowns, tier labels, polarity visualizations, micro-reflections and audit-friendly scoring components that help users understand why a score changed.

- Fine-grained polarity outputs (normalized masculine/feminine values and balance index) and corresponding micro-reflections that support identity-sensitive feedback and encourage balanced regulation strategies.

- Novel experiential personalization such as Symphonic Match and Sanctuary audio personalization by mapping multi-dimensional emotional signatures to frequency/fingerprint profiles for tailored auditory feedback.

- Improved user engagement and mutual consent mechanics via relationship state triggers, context-specific prompts and joint rituals (e.g., CoupleSong progression with double consent), which support cooperative participation and reduce unilateral exposure.

- Safe expressive features (unsent messages, Ghost Mode, Archive of Self) that let users externalize and reflect without forcing immediate disclosure, aiding reflective processing while respecting boundaries.

- Privacy-aware configuration and data governance options that allow balancing personalization with user privacy (e.g., configurable data sharing, consented couple features, explicit relationship entity controls).

- Modularity and extensibility through separate archetype, shadow, polarity, readiness and relationship state engines, enabling updates, custom models and domain-specific extensions without redesigning core workflows.

- Deterministic, reproducible scoring by using bounded scales, defined penalty/stabilizer rules and tier labelling, facilitating testing, validation and regulatory traceability.

- Actionable guidance and triage: context-specific prompts, ritual recommendations, risk labels and match suggestions that translate analytic outputs into practical next steps tailored to relationship stage and user preferences.

- Cross-cultural and individual adaptability via configurable archetype and shadow ontologies and weighted scoring that can be tuned for different populations or use cases.

- Scalability for large populations and longitudinal studies by storing relational entities and explicit relationships in structured data stores, enabling cohort analytics and composite emotional profiling.

- Reduced cognitive load and improved decision support by presenting compact, prioritized outputs (e.g., stability scores, top-ranked matches, immediate micro-reflections) rather than raw sensor streams.

- Ethical alignment features (consent mechanisms, double-consent couple actions, bounded influence parameters, transparency of scoring components) that support responsible deployment and user agency.

[0005] These and other advantages support improved continuity, interpretability, personalization and ethical alignment for relationship scoring, emotional guidance and adaptive support applications.

BRIEF DESCRIPTION OF DRAWINGS

[0006] Fig. 1 illustrates a flowchart that receives user response data, computes readiness and compatibility scores, operates a sanctuary subsystem to update internal metrics, adjusts the scores based on those metrics, and displays emotional guidance outputs via a user interface.

[0007] Fig. 2 illustrates a flowchart for a relationship analytics method that ingests user data, processes it with emotional engines, generates compatibility scores, and updates journey outputs.

[0008] Fig. 3 depicts a flowchart for computing and displaying a relationship compatibility score by receiving pair inputs, calculating weighted sub-scores with inconsistency penalties, aggregating results, and showing the score with a tier label.

[0009] Fig. 4 illustrates a flowchart for an emotional readiness scoring method with steps for providing a questionnaire, receiving weighted answers, detecting inconsistencies, calculating a normalized 0–100 score, and storing the result.

[0010] Fig. 5 depicts a flowchart for collecting user assessment data, processing archetype and shadow classifications, storing the results, and indicating start and end.

[0011] Fig. 6 illustrates a polarity questionnaire workflow that sends questions, receives responses, computes normalized masculine and feminine scores with a polarity balance index, updates the user profile, and outputs UI prompts.

[0012] Fig. 7 illustrates a flowchart for operating an adaptive emotional reflection engine that receives inputs, updates sub-modules, computes a Sanctuary stability score, and adjusts readiness and compatibility scores.

[0013] Fig. 8 illustrates a flowchart for relationship state management, starting with maintaining a Relationship Tab, then receiving interaction data, updating stages via a state engine, and triggering context-specific prompts and rituals.

[0014] Fig. 9 illustrates a flowchart for creating a couplesong, obtaining double consent, setting and advancing song stages based on time, rituals, and relationship status, and updating the song version accordingly.

[0015] Fig. 10 illustrates a flowchart for collecting user emotional data, deriving an emotional signature, mapping it to a frequency fingerprint, and using it to modulate audio content.

[0016] Fig. 11 illustrates a start-to-end flowchart for managing relational emotional analytics data by storing entities, maintaining data relationships, executing analytics queries, and outputting insights.

DETAILED DESCRIPTION OF THE INVENTION

[0017] The present disclosure describes a computer-implemented emotional intelligence system for a relationship scoring platform that ingests psychometric, behavioral, astrological, numerological, and communication-style inputs together with user responses to archetype, shadow, readiness, and polarity questionnaires. The system applies an archetype engine and a shadow-pattern engine to assign archetype and shadow identifiers and generate behavioral prediction vectors, applies a readiness scoring engine to compute a readiness score on a bounded numerical scale from weighted answers with inconsistency penalties and polarity stabilizers, and applies a compatibility engine to compute a multi-dimensional compatibility score on a bounded numerical scale by aggregating weighted sub-scores (including archetype match, shadow match, communication/conflict, love-language/regulation, astrology and numerology) with predefined weightings, inconsistency penalties and tier labeling. The system further computes normalized masculine and feminine polarity outputs and a polarity balance index with visualizations and micro-reflections, derives multi-dimensional emotional signatures and maps them to personalized frequency fingerprints for audio personalization, and persists relational entities and explicit relationship links in a data store for analytics and longitudinal profiling.

[0018] Terms used herein has the following meanings:

[0019] Sanctuary: A computer-implemented emotional regulation subsystem comprising modules that ingest user reflections, emotional inputs, interaction logs, and ritual data. Generates Sanctuary stability metrics including emotional volatility, reflection depth, and polarity adjustments.

[0020] Stillness Mode: A digital mindfulness module configured for timed breathing sequences and low-interaction reflective prompts, producing stillness consistency metrics.

[0021] Emotional Mirror: A natural-language processing module analyzing emotional entries to detect themes, tension patterns, and attachment indicators, generating clarity metrics.

[0022] Whisper Window: A text-processing subsystem for unsent emotional messages, generating emotional honesty and volatility reduction metrics.

[0023] Ghost Mode: A usage-monitoring module detecting withdrawal or avoidance signals to produce avoidance metrics affecting readiness and polarity.

[0024] Alignment Compass: A classification engine mapping emotional logs to emotional quadrants and producing alignment-state adjustments.

[0025] Archive of Self: A data-store logging emotional reflections, rituals, and Sanctuary interactions to support longitudinal emotional analysis.

[0026] Last Light: A reflection module for legacy-themed emotional entries generating shadow-reduction and polarity-stabilization metrics.

[0027] Truth Signal: A micro-insight generator sending short emotional guidance messages based on recent emotional activity.

[0028] Mirror Matches: A system generating match suggestions or emotional reflections based on archetype, shadow, polarity, readiness, and Sanctuary metrics.

[0029] Relationship Tab: A relational state machine storing a pair's relationship stage and triggering context-specific prompts or media unlocks.

[0030] Symphonic Match: A couple-based media system generating an evolving audio object linked to emotional and relational metrics.

[0031] CoupleSong: A media record containing SongVersions tied to relationship stage and emotional parameters.

[0032] SongMaster: A base audio template defining musical structure for derived SongVersions.SongVersion: A stage-specific audio file selected via relationship stage and Sanctuary metrics.

[0033] Frequency Fingerprint: A multi-dimensional emotional signature mapped to tone palettes for audio modulation.

[0034] Emotional Signature: A vector representation of user emotional parameters including archetype, shadow, polarity, and zodiac.

[0035] Tone Palette: A set of frequency-based audio themes derived from the frequency fingerprint.

[0036] Lyric Alchemy: A lyric-generation engine translating emotional signatures into adaptive textual content.

[0037] Oracle Engine: A predictive modeling subsystem forecasting emotional states or outcomes using emotional signatures and logs.

[0038] Energy Type: A high-level classifier (Protector, Nurturer, Blended) derived from emotional and behavioral metrics.

[0039] Energy Subtype: A secondary classifier computed via weighted behavioral clusters and communication patterns.

[0040] Energy Microtype: A tertiary classifier derived from micro-patterns in reflection logs and readiness responses.

[0041] Polarity Index: A normalized measure representing masculine and feminine polarity ratios.

[0042] Polarity Evolution: A longitudinal metric tracking polarity trends over time based on system logs.

[0043] Composite Profile: A merged emotional profile combining archetype, shadow, polarity, zodiac, numerology, readiness, and Sanctuary metrics.

[0044] Simulation Scoring Module: A compatibility system evaluating fictional or non-user entities using the compatibility engine.

[0045] Score With Stars: A branded simulation mode using predefined celebrity templates for compatibility scoring.

[0046] Dream Match Meter: A simulation scoring mode generating compatibility outputs for imagined or manually entered partner profiles.

[0047] The Emotional Cognition OS is a multi-layer artificial intelligence architecture designed to classify, interpret, predict, and simulate human emotional behavior using relational, developmental, and attachment-based frameworks. The system integrates twelve modules into a unified emotional cognition framework.

[0048] Plant Model (Growth Layer): Models long-term emotional development based on trust, consistency, abandonment decay, and repair cycles.

[0049] Pet Model (Attachment Layer): Models real-time attachment behaviors such as proximity seeking, reassurance, boundary testing, and loyalty patterns.

[0050] Relationship Model (Relational Ecosystem): Models multi-agent emotional dynamics and relational feedback loops.

[0051] Archetypes: Ten emotional identity categories used to classify relational patterns.

[0052] Shadow Patterns: Six behavioral risk profiles used to detect emotional dysfunction.

[0053] Polarity State Engine: Infers masculine, feminine, and blended energetic states.

[0054] Reflection Cluster: Detects contradictions across user responses.

[0055] Multi-Agent Relational Simulation Engine: Simulates emotional interactions between two or moreprofiles.

[0056] Emotional Reinforcement Learning: Reinforcement-learning system rewarding healthy relational behavior.

[0057] Emotional Evolution Tracking: Tracks long-term emotional growth.

[0058] Unified Scoring System: Produces readiness, compatibility, polarity, archetype, and shadow scores.

[0059] Emotional operating system (EOS): A coordinated software framework that ingests multi-source emotional and relational data and orchestrates engines such as archetype, shadow, readiness, compatibility, polarity, Sanctuary, and relationship state engines to produce scores, prompts, and media outputs.

[0060] Relationship analytics: Computer-implemented analysis of user emotional, behavioral, and interaction data to infer relationship readiness, compatibility, risk, and progression states.

[0061] Relationship scoring platform: A software platform that computes, stores, and displays quantitative metrics such as readiness scores and compatibility scores for users and user pairs.

[0062] Emotional analytics: Processing of user signals (answers, logs, behaviors) to derive structured emotional attributes including archetypes, shadow patterns, polarity indices, and frequency fingerprints.

[0063] Relationship forecasting: Predicting likely relationship outcomes or trajectories for a pair of users based on multi-dimensional compatibility signals and historical interaction patterns.

[0064] Dynamic relationship evolution: Continuous updating of scores, media, and prompts as a relationship progresses through defined states and as users generate new emotional and behavioral data.

[0065] Data inputs and profiles

[0066] Psychometric responses: Answers to structured questionnaires designed to assess personality traits, emotional tendencies, and relational styles, used as raw input to multiple engines.

[0067] Behavioral pattern data: Observed or self-reported interaction behaviors such as withdrawal, pursuit, conflict styles, and consistency patterns over time.

[0068] Astrology data / parameters: Structured astrological information, such as birth date and chart factors, used as features in compatibility and frequency fingerprint computation.

[0069] Numerology data / parameters: Structured numerological information derived from names and dates, used as a weighted sub-factor in compatibility scoring and tone palette selection.

[0070] Communication and conflict style indicators: Data representing how a user tends to communicate and manage disagreement, used as a dedicated compatibility sub-score.

[0071] Love language and regulation strategy selections: User selections representing preferred modes of receiving affection and preferred emotional regulation strategies, which influence compatibility and Sanctuary prompts.

[0072] Emotional logs: Time-stamped textual or structured reflections from a user describing emotional states, events, and insights, often stored in the Archive of Self.

[0073] Regulation strategy selections: User-indicated coping or regulation methods (e.g., withdrawal, journaling, breathwork) used as factors in readiness, Sanctuary behavior, and frequency fingerprinting.

[0074] User profile: A persistent record associating a user with scores, archetype and shadow classifications, polarity outputs, Sanctuary metrics, and relationship tab entries.

[0075] Engines and processors

[0076] Archetype engine: A software component that clusters emotional and behavioral answers into one of multiple archetype types, outputs an archetype ID, prediction vector, consistency flags, and compatibility weightings.

[0077] Shadow pattern engine: A classification engine that maps inputs to one of several sabotage-oriented "shadow" types and drives risk detection, compatibility weighting, and Sanctuary prompts.

[0078] Readiness scoring engine: An engine that aggregates weighted readiness-question answers, applies penalties for contradictions, and normalizes to produce a 0–100 readiness score.

[0079] Compatibility engine: An engine that computes multi-dimensional compatibility by aggregating weighted sub-scores and penalties into a bounded compatibility score.

[0080] Polarity engine / polarity system: Logic that scores masculine and feminine energy expressions from questionnaire responses and computes a balance index.

[0081] Sanctuary subsystem / Sanctuary system: An adaptive emotional reflection engine composed of multiple submodules (Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self, Alignment Compass, etc.) that tracks and influences emotional regulation and feeds back into scores and media.

[0082] Relationship state engine: Logic that maintains and transitions a relationship status (Relationship Tab) between discrete stages and triggers prompts and rituals on state changes.

[0083] Dynamic media generation engine: Components that generate or select evolving media (e.g., Symphonic Match songs, micro-lyrics) based on emotional signatures and relationship progression.

[0084] Scores and metrics: Readiness score: A bounded 0–100 metric representing how emotionally prepared a user is for relational engagement, computed from weighted answers and inconsistency penalties.

[0085] Compatibility score: A bounded metric (e.g., 350–850 or 0–N) computed by weighting multiple sub-scores (archetype, shadow, communication, love language/regulation, astrology, numerology) and subtracting penalties for contradictions.

[0086] Sub-score / sub-score weighting: A scalar metric representing a single compatibility dimension (e.g., archetype match) that is scaled by a defined percentage contribution before aggregation.

[0087] Inconsistency clusters / contradiction flags: Detected patterns of conflicting user answers that trigger penalties applied to readiness or compatibility calculations.

[0088] Polarity balance index: A scalar metric derived from normalized masculine and feminine scores that reflects the degree and direction of energy balance.

[0089] Sanctuary stability score: A composite metric (on a bounded scale) calculated from stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment.

[0090] Shadow activation metric / shadow volatility: A measure of the current intensity or instability of a user's self-sabotage tendencies, modulated by Sanctuary behaviors such as Stillness and Last Light.

[0091] Curtain stability score: A metric indicating stability of emotional openness across staged "curtains" (e.g., soft reveal, boundary tension, attachment–independence), influenced by Sanctuary.

[0092] Tier label: A qualitative label (e.g., Soul-Aligned, Strong Potential, Risky, Red Zone) mapped to compatibility score ranges for user-facing interpretation.

[0093] Composite emotional profile: An aggregated representation of a user's emotional attributes over time, combining archetype, shadow, polarity, readiness, logs, and Sanctuary metrics.

[0094] Longitudinal evolution metrics: Time-series metrics that track how a user's or couple's emotional attributes and scores change over successive sessions and relationship stages.

[0095] Archetypes, shadows, energies

[0096] Archetype / archetype identifier: A categorical emotional blueprint assigned to a user from a fixed set (e.g., Icebox, Phantom Seeker, Regulated Grown-Up, etc.), capturing dominant relational patterns.

[0097] Behavioral prediction vector: A multi-dimensional numerical representation of predicted behaviors associated with a given archetype.

[0098] Consistency flags: Indicators produced by the archetype engine that signal how internally consistent the user's responses are for a given archetype assignment.

[0099] Shadow pattern / shadow pattern type: A sabotaging relational tendency classified into types such as Manipulator, Stonewaller, Love Bomber, Chameleon, Scorekeeper, or Self-Saboteur.

[0100] Shadow sabotage indicators: Answer patterns or behaviors that evidence a particular shadow pattern and feed into risk detection and Sanctuary prompts.

[0101] Energy type: A higher-level classification of relational energy (Protector, Nurturer, Blended) further refined into subtypes used for composite profiles and Relationship Tab dynamics.

[0102] Protector, Nurturer, Blended subtypes: Microtypes (e.g., Guardian, Healer, Connector) specifying how protective or nurturing energy manifests behaviorally.

[0103] Stillness Mode: A Sanctuary module that guides the user through breathwork, music, or reflection to reduce emotional volatility, boost readiness, and lower shadow activation.

[0104] Emotional Mirror: A Sanctuary module that analyzes themes, fears, attachment signals, and tension in user reflections and contributes to curtain stability and Sanctuary stability.

[0105] Whisper Window: A module that ingests unsent emotional messages and transforms them into insight and score adjustments, often reducing compatibility penalties and increasing emotional honesty.

[0106] Ghost Mode: A module tracking withdrawal or avoidance behaviors, which can stabilize polarity while penalizing compatibility when overused.

[0107] Archive of Self: A repository of journals, reflections, and ritual logs used for pattern analysis and periodic readiness adjustments.

[0108] Alignment Compass: A state classifier that places the user into alignment quadrants such as Connected, Guarded, Hopeful, or Drained and drives score adjustments.

[0109] Mirror Matches: Daily or periodic emotional match suggestions or reflections derived from current Sanctuary and polarity data.

[0110] Truth Signal: A concise insight or micro-message generated from recent reflections, polarity trends, and shadow activity to prompt targeted emotional regulation.

[0111] Last Light: A Sanctuary module for deeper ancestral or legacy emotional processing that strongly affects polarity balance and shadow activation.

[0112] Joint Sanctuary rituals: Coordinated activities completed by two users, logged in both Sanctuary and Relationship Tab, which can boost joint compatibility.

[0113] Relationship Tab and state

[0114] Relationship Tab: A record representing the explicit relationship status between two users, with discrete stages (e.g., Talking, Friends, Dating, Maybe Something, Long Term, Looking For Marriage).

[0115] Relationship status / relationship journey stages: Discrete, ordered stages representing how far a connection has progressed and used as triggers for prompts, rituals, and Symphonic Match stages.

[0116] Relationship state transition: A change in Relationship Tab status triggered by explicit user input and/or observed behaviors combined with readiness and compatibility thresholds.

[0117] Symphonic Match and media

[0118] Symphonic Match: An evolving shared song or media object for a couple that progresses through stages as the relationship and Sanctuary activities advance.

[0119] CoupleSong record: A data object representing a specific pair's shared song, linked to stages and audio versions.

[0120] SongMaster: A base song template or master definition from which staged SongVersions are derived.

[0121] SongVersion: A stage-specific version of a song, associated with a relationship stage or Symphonic Match stage in the CoupleSong.

[0122] Song stage / stage progression model: Discrete levels (e.g., Stage 0 locked, Stage 1 intro, Stage 2 build, Stage 3 full song) through which the CoupleSong advances based on rules.

[0123] Double consent signals / double-consent unlock: Confirmations from both users authorizing activation or advancement of couple-based media features such as Symphonic Match.

[0124] Playback: Delivery of the current SongVersion or audio content to one or both user devices based on the current stage.

[0125] Frequency fingerprint: A derived emotional sound signature based on archetype, shadow, polarity, astrology, numerology, logs, and regulation strategies, used to define a tone palette.

[0126] Tone palette / personalized tone palette: A set of audio frequency themes (e.g., sacral, heart, mind) mapped from the frequency fingerprint and used to select or modulate songs.

[0127] Lyric Alchemy: An optional subsystem that generates adaptive micro-lyrics or prompts tailored to emotional context, song stage, and archetype-shadow profile.

[0128] Relational entities / relational map: Structured tables or objects (e.g., User, UserAnswers, PolaritySessions, ArchetypeProfile, ShadowSignals, RelationshipTab, CoupleSong, CompatibilityScore, Sanctuary logs) and their relationships.

[0129] Sanctuary log entries: Event records capturing user interactions with Sanctuary modules, including timestamps, types, and quantitative effects.

[0130] Analytics queries: Computations executed over the relational entities to derive composite profiles, risk indicators, or longitudinal trends.

[0131]

[0132] In one case, the system operates in 5 phases:

[0133] Phase 1 — Data Acquisition: Scenario-based inputs, contradiction pairs, polarity triggers, archetype selectors, shadow indicators, and growth markers.

[0134] Phase 2 — Label Encoding: Parallel labeling across growth, attachment, ecosystem, archetype, shadow, polarity, and contradiction vector layers.

[0135] Phase 3 — Emotional Neural Processing: Transformer or RNN-based inference through archetype, polarity, shadow, and contradiction modules.

[0136] Phase 4 — Multi-Agent Simulation: Relational predictions using archetype, shadow, polarity, energy, readiness, astrology, and numerology pair-keys.

[0137] Phase 5 — Reinforcement Learning and Evolution Tracking: Updates emotional state models based onhealthy or unhealthy relational decisions.

[0138] Data Structures include

a. • Emotional State Vector

b. • Archetype Probability Tensor

c. • Shadow Activation Map

d. • Polarity Profile

e. • Contradiction Matrix

f. • Evolution Timeline Log

g. • Compatibility Simulation Matrix

[0139] Scoring Algorithms include

a. • Readiness Score (0–100)

b. • Compatibility Score (350–850)

c. • Polarity Index

d. • Reflection Cluster Score

e. • Archetype Alignment Score

f. • Shadow Risk Level

[0140] System Outputs:

a. • Predicted emotional state

b. • Relational trajectory forecast

c. • Emotional risk markers

d. • Archetype and shadow identification

e. • Polarity status

f. • Contradiction flags• Readiness and compatibility scores

[0141] The system introduces:

a. • Multi-layer emotional modeling across growth, attachment, and ecosystem states

b. • Polarity energetics within emotional inference

c. • Contradiction-pair detection for emotional consistency

d. • Astrology and numerology enhancements in multi-agent simulations

e. • Emotional reinforcement learning targeting relational behavior

f. • Emotional evolution tracking

g. • A unified emotional OS for AI across industries

[0142] Score With Stars: This feature uses the simulation engine to score compatibility with fictional, celebrity, or non user profiles. It pulls the user's archetype, shadow type, readiness, polarity, zodiac, numerology, and emotional logs. It applies the compatibility formula to generate a real score and emotional insight. This needs explicit reference so the simulation scoring module covers external entities with branded scoring logic.

[0143] Lyric Alchemy: Lyric Alchemy is the lyric generation system tied to the emotional engines. It expands the Symphonic Match model by generating custom lyrics based on archetype, shadow, polarity, zodiac, numerology, and emotional reflections. It uses the same emotional signature that drives frequency fingerprints. This needs specific mention as a lyric engine.

[0144] 3Polarity Test Structure: A 30 question polarity assessment is used, each answer produces masculine and feminine values. These produce a polarity index, polarity imbalance, and polarity evolution metrics. The polarity engine uses this information in compatibility, readiness, and Sanctuary prompts. The claim should note the multi question structure as part of the overall polarity pipeline.

[0145] Energy Subtypes and Microtypes: Each user receives an energy type (Protector, Nurturer, or Blended). They also receive a subtype and microtype. This creates deeper profile precision. It is used for compatibility, composite profiles, Sanctuary prompts, and reflection logic. This system needs explicit inclusion.

[0146] Polarity Evolution Tracking: Over time the system adjusts polarity values through Sanctuary logs, emotional volatility, and relationship changes. This evolution is measured and stored. It influences readiness, compatibility, and long term predictions. This needs a dependent claim.

[0147] Composite Profile Fusion Logic: Composite profiles combine archetype, shadow, polarity, zodiac, energy type, subtype, readiness, and Sanctuary data. The system uses fusion rules to produce protectors, nurturers, or blended types with subtype predictions. This should be defined as a fusion method, not just an assignment.

[0148] Frequency Fingerprint to Audio Generation Logic: The system maps emotional signatures to tone palettes then generates full audio sequences for Symphonic Match and Sanctuary. Lyric Alchemy also uses this signature to create lyric patterns. The generation pipeline should be mentioned as a scoring to audio conversion engine.

[0149] Oracle Style Predictive Messaging: The system uses emotional patterns, shadow activation, polarity trends, and reflection history to predict likely emotional outcomes and generate guidance. This is used in Sanctuary, Mirror Matches, Truth Signal, and emotional prompts.

[0150] The computer-implemented system and methods for emotional intelligence and relationship analytics ingest psychometric, behavioral, astrology, numerology, communication, and polarity questionnaire data to compute bounded readiness and compatibility scores from weighted sub-scores with inconsistency penalties and polarity stabilizers. An archetype engine and shadow pattern engine

classify users into archetypes and shadow types to generate behavioral vectors and warnings, while a polarity engine computes normalized masculine and feminine scores and a polarity balance index. A Sanctuary adaptive emotional ecosystem maintains internal metrics including a Sanctuary stability score derived from stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, volatility, ritual participation, and relationship alignment; Sanctuary modules (Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self, Alignment Compass) update these metrics from reflections, rituals, unsent messages, and interaction logs and exert a bounded influence on readiness and compatibility. A relationship state engine manages Relationship Tabs and joint rituals, triggers context-specific prompts, and supports evolving couple media (CoupleSong) and personalized emotional frequency fingerprints, while relational data are stored and queried to produce composite profiles, longitudinal metrics, and dynamic emotional guidance outputs for user interfaces

[0151] An adaptive Sanctuary subsystem operates as an emotional ecosystem that ingests reflections, ritual logs, unsent messages and state selections, updates Sanctuary sub-modules including Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self and Alignment Compass, and computes a Sanctuary stability score from sub-metrics such as stillness consistency, mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation and relationship alignment. The Sanctuary stability score applies a defined, bounded percentage influence to readiness and compatibility outputs. A relationship state engine maintains Relationship Tabs across predefined stages (talking, friends, dating, ongoing), updates relationship status based on interaction data and scores, triggers context-specific prompts and joint rituals, and supports progression features such as a CoupleSong model that advances with dual consent and ritual completion. The system performs analytics over stored relational entities to derive composite emotional profiles and temporal evolution metrics, and delivers dynamic, contextually selected emotional guidance outputs and journey

artifacts—including stillness prompts, emotional mirror prompts, unsent message prompts, polarity feedback, match suggestions and risk labels—to user interfaces.

[0152] Turning now to Fig. 1, the reference label S100 denotes receiving, from a first user device, user response data associated with at least one of an archetype profile, a shadow pattern profile, a readiness questionnaire, a polarity questionnaire, and relationship status information. In this step the system accepts and records those user responses for use by downstream profiling, scoring, Sanctuary updates, and relationship-state processing.

[0153] Reference label S102 corresponds to processing the user response data to generate, by one or more processors, a readiness score on a bounded numerical scale based on weighted user answers, consistency penalties, and polarity stabilizers. In performing the step represented by S102, weighted responses received from a user are evaluated to detect inconsistency clusters and contradiction flags, penalties are applied for detected inconsistencies, polarity-based stabilizing adjustments are computed and incorporated, and the resulting adjusted sum is normalized to produce a readiness score constrained to a predetermined numerical range for storage and subsequent use in matching, guidance and relationship-state operations.

[0154] Step S104 concerns processing the user response data to generate, by the one or more processors, a compatibility score on a bounded numerical scale. In S104 the processors compute a plurality of weighted sub-scores that include at least an archetype match sub-score and a shadow match sub-score, apply predefined weightings and detected inconsistency penalties to those sub-scores, aggregate the weighted and penalized sub-scores, normalize the aggregate to the prescribed bounded numerical range, and output the resulting compatibility score for use in downstream displays, tier labeling, matching logic and relationship-state updates.

[0155] In step S108 the system adjusts one or both of the readiness score and the compatibility score by applying a modifier derived from Sanctuary internal metrics. The Sanctuary-derived modifier is constrained to a predetermined percentage range so that Sanctuary activity contributes only a bounded influence to the adjusted score(s). The computed adjustment is applied in a manner that preserves the bounded numerical scales of the readiness and compatibility outputs, for example by proportional scaling or a limited additive offset, as defined by system parameters.

[0156] The system causes display of dynamic emotional guidance, match suggestions, risk labels and other journey outputs on user devices and provides interfaces that present stillness prompts, emotional mirror prompts, unsent message prompts, polarity feedback, match recommendations and analytic insights derived from composite profiles and longitudinal metrics. The data store records user records, answer records, readiness scores, polarity sessions, archetype and shadow profiles, relationship tab records, CoupleSong records, compatibility scores and Sanctuary logs to support feature triggering and reporting over time.

[0157] In accordance with S110, the system causes a user interface on the first user device to display at least one emotional guidance output selected from stillness prompts, emotional mirror prompts, unsent message prompts, and polarity feedback. The emotional guidance output is dynamically selected based on at least one of the readiness score, the compatibility score, a polarity balance index, and the Sanctuary internal metrics.

[0158] Figure 2 illustrates a flowchart of a relationship analytics method in which the process begins and proceeds through sequential stages S200, S202, S204, and S206 before ending. In S200, the system ingests, from a user device, psychometric responses, behavioral pattern data, astrology data, numerology data, and communication style indicators for a first user. In S202, one or more processors apply an archetype engine, a shadow pattern engine, a polarity engine, and a readiness scoring engine

to the ingested data to generate a readiness score on a bounded numerical scale and an archetype identification for the first user. In S204, a compatibility engine produces a compatibility score for pairing the first user with other users on a bounded compatibility scale using weighted contributions that include at least archetype match and shadow match derived from S202. In S206, a relationship state engine updates relationship journey outputs using the readiness score from S202 and the compatibility score from S204, the outputs including at least one of a match suggestion, a risk label, and an emotional guidance prompt, after which the method ends.

[0159] At S202, one or more processors execute a feature-processing pipeline that consumes the ingested psychometric responses, behavioral signals, astrology and numerology parameters, and communication-style indicators for the first user. The processors invoke an archetype engine to cluster the features and assign an archetype identification, invoke a shadow pattern engine and a polarity engine to derive shadow and polarity features used as stabilizers and consistency checks, and supply the combined feature set to a readiness scoring engine that computes a readiness score on a bounded numerical scale by applying predefined weightings, inconsistency penalties, and normalization. The readiness score and the archetype identification are produced for storage and downstream use in compatibility analytics and guidance generation.

[0160] In step S206, a relationship state engine updates relationship journey outputs for a user by ingesting the most recent readiness score and compatibility score together with context indicators such as stage status, data freshness, and prior output history. The engine evaluates decision thresholds and hysteresis bands to determine whether to surface a match suggestion, a risk label, and/or an emotional guidance prompt. A match suggestion is produced by ranking candidate pairings according to the compatibility score while applying readiness gating, penalty adjustments, and stage-specific filters, and includes a tier designation and rationale tags derived from contributing sub-scores. A risk label is

assigned by mapping combinations of reduced readiness, unfavorable sub-score patterns, and volatility indicators to categorized risks with bounded alert levels. An emotional guidance prompt is selected from a catalog indexed by polarity balance, shadow signals, and Sanctuary stability so that the prompt is context-appropriate and is rate-limited to avoid fatigue. The engine writes the selected outputs to a relationship timeline, associates each output with the underlying score versions and timestamps, schedules refresh windows, and causes presentation of the outputs via the user interface. When subsequent score updates exceed a tolerance band, the engine re-evaluates and amends previously issued journey outputs to maintain consistency with the current relationship state.

[0161] Figure 3 illustrates a flowchart executed by one or more processors to compute and present a relationship compatibility score. In step S300, the system receives, for a pair of users, input data including archetype identifiers, shadow pattern types, communication and conflict style indicators, love language and regulation strategy selections, astrology parameters, and numerology parameters. In step S302, the system computes a plurality of sub-scores comprising at least an archetype match sub-score, a shadow match sub-score, a communication and conflict sub-score, a love language regulation sub-score, an astrology sub-score, and a numerology sub-score. In step S304, predefined weightings are applied to the plurality of sub-scores and inconsistency penalties are applied responsive to detected contradictions in the input data. In step S306, the weighted sub-scores and penalties are aggregated to generate a compatibility score within a specified numerical range. In step S308, the system causes display of the compatibility score and an associated tier label on at least one user device.

[0162] At S300, a computing platform receives, for a designated pair of users, structured input data that includes archetype identifiers and shadow pattern types for each user together with communication and conflict style indicators, love language selections and regulation strategy selections, and astrology and numerology parameters. The data is accepted from one or more user devices or

profile sources via a network interface, tagged with user identifiers and timestamps, normalized into a canonical schema, and validated by mapping archetype and shadow labels to enumerated codes, constraining style indicators to defined domains, and parsing astrology and numerology values into parameter fields. Partial or revised submissions are merged with existing pair records using idempotent update logic and de-duplication, resulting in a pair-linked input bundle persisted for downstream compatibility computations and related journey outputs.

[0163] An astrology sub-score is computed from natal parameters, including at least Sun, Moon, and Rising placements, together with planetary relationship indicators such as Venus and Mars dynamics and selected aspects. A weighted aspect map combined with element/modality concordance produces a composite value that is time-normalized and scaled. A numerology sub-score is calculated from life path, destiny, and personal year values, and incorporates name-based digit sums; a compatibility table and modular distance functions produce a score that is then normalized. For each sub-score, missing inputs are handled via imputation with corresponding confidence reduction, outliers are clipped to preserve the bounded range, and per-dimension confidence values and explanation tokens are emitted for downstream weighting and penalty application in subsequent steps.

[0164] Figure 4 illustrates a method for computing an emotional readiness score. In S400, a readiness questionnaire comprising multiple questions configured to assess emotional regulation and relational preparedness is provided to a first user device. In S402, the system receives from the first user device weighted user answers to the readiness questionnaire. In S404, one or more processors evaluate the answers to detect inconsistency clusters and set contradiction flags. Using the same weighted answers from S402 and the inconsistency and contradiction indications from S404, S406 calculates a raw readiness sum, applies penalties based on the detected inconsistency clusters and contradiction flags, and normalizes by a number of questions to produce a readiness score on a bounded 0–100 scale. The

resulting score from S406 is then stored in S408 in a user profile for use in subsequent matching and emotional guidance operations.

[0165] In step S400, a readiness questionnaire is provided to a first user device by a networked service that selects and packages multiple questions configured to assess emotional regulation and relational preparedness. The questionnaire includes items such as frequency- and intensity-scaled prompts, situational-judgment vignettes, and brief self-report statements mapped to constructs including self-soothing capability, boundary maintenance, accountability, conflict recovery, reflective capacity, distress tolerance, and openness to relational feedback. Each item is transmitted with metadata comprising a question identifier, version identifier, scoring weight, valence, inconsistency-cluster tag, polarity-stabilizer tag, normalization constant, presentation type, and allowable response range, together with a session token and locale parameters for device-side rendering. The step optionally applies adaptive item selection and randomized ordering based on historical profile indicators and device context to reduce response bias while maintaining coverage of required constructs. Transport employs authenticated requests and encrypted payloads, and the delivered questionnaire embeds timing constraints, attention checks, accessibility descriptors, and consent acknowledgments to ensure valid administration prior to receipt of answers for subsequent processing.

[0166] At S404, one or more processors evaluate the received readiness questionnaire answers to identify inconsistency clusters and contradiction flags. The processors normalize item scores, apply reverse coding where defined, and compute agreement and coherence metrics across items mapped to common constructs. A rule set defines logically exclusive or reverse-keyed item pairs and multi-item consistency expectations; violations of these expectations produce contradiction flags when divergence exceeds a configured threshold. In parallel, the processors form an item graph in which edges encode empirical correlations and logical links; deviations from expected edge weights, together with response-

behavior signals including response-time anomalies, straightlining detection, and variance checks against stated confidence, are used to cluster groups of answers that jointly indicate incoherence. Each detected cluster is assigned a severity score derived from violation counts, magnitudes, and item criticality weights.

[0167] The processors output a structured record comprising cluster identifiers, implicated item indices, violated rule identifiers, contradiction flags, and penalty coefficients. These outputs are supplied to the readiness scoring stage to adjust the raw readiness sum and are stored with the session record for traceability, analytics, and subsequent guidance generation.

[0168] At S406, one or more processors compute a readiness score by first mapping each received answer to a numeric response value on a common scale and multiplying the response value by a predefined question weight to produce weighted items, then summing the weighted items to form a raw readiness sum. Penalty amounts are then derived from inconsistency clusters and contradiction flags detected in prior processing, with cluster penalties scaling with the number and severity of inconsistencies and contradiction penalties reflecting rule-based conflicts, each capped at a predefined fraction of the raw readiness sum to prevent overcorrection. The processor subtracts the aggregated penalties from the raw readiness sum to yield an adjusted value, normalizes the adjusted value by a denominator corresponding to the sum of weights for the answered items, and linearly maps the result to a bounded 0–100 range, clamping the value to that interval so the final readiness score remains within the specified limits irrespective of missing answers or extreme penalty conditions.

[0169] Figure 5 illustrates a flowchart that begins at START and ends at END. In step S500, the system collects, from a first user, answer data to an archetype and shadow assessment including emotional patterns, behavioral tendencies, and regulation indicators. In step S502, the collected answer data is processed by an archetype engine that clusters responses into a predefined set of archetype types to

assign an archetype identifier and generate a behavioral prediction vector and consistency flags. In step S504, at least a subset of the answer data is processed by a shadow pattern engine to classify the first user into one of multiple shadow pattern types representing self-sabotage tendencies. In step S506, the archetype identifier and the shadow pattern type, together with any generated behavioral prediction vector and consistency flags, are stored in association with the first user for use in compatibility scoring, Sanctuary prompts, and behavioral warnings.

[0170] Reference label S500 denotes operations in which the system collects, from a first user, answer data for an archetype and shadow assessment that solicit disclosures of emotional patterns, behavioral tendencies, and regulation indicators. In S500, the answers are received via a user interface, time-stamped, associated with the user's profile, and prepared for downstream processing by the archetype and shadow engines to enable subsequent identification, prediction vector generation, and storage for compatibility scoring and Sanctuary prompts.

[0171] Additional operations compute normalized masculine and feminine polarity scores and a polarity balance index, generate polarity visualizations with micro-reflections, derive multi-dimensional emotional signatures from user-level inputs, and map those signatures to frequency fingerprints used to select or modulate audio content within Symphonic Match and Sanctuary features. The platform stores user records, answer records, readiness and compatibility scores, polarity sessions, archetype and shadow profiles, relationship tabs, couple songs, and Sanctuary logs; maintains explicit links capturing emotional states, interactions, and journeys; executes analytics to produce composite emotional profiles and longitudinal evolution metrics; and outputs insights for personalized guidance and feature triggering within an emotional operating system.

[0172] Figure 6 illustrates a polarity questionnaire workflow in which the system transmits, to a user device, a polarity questionnaire comprising multiple items configured to measure masculine energy,

feminine energy, and comfort with relational presence and absence (S600), receives from the user device response data to the polarity questionnaire (S602), computes by one or more processors a normalized masculine score, a normalized feminine score, and a polarity balance index based on the response data (S604), updates a user profile with the masculine score, the feminine score, and the polarity balance index as current polarity outputs (S606), and provides via a user interface at least one polarity visualization and a micro-reflection prompt based on the polarity balance index generated by the Sanctuary emotional reflection engine (S608).

[0173] At S606, the processors persist the polarity outputs produced at S604 into the user's profile record by writing three bounded, normalized scalar fields — a masculine score, a feminine score, and a polarity balance index — and marking these fields as the current polarity outputs. The write operation associates metadata with the values, including a timestamp, a questionnaire or session identifier, a normalization or model-version tag, and, where available, confidence or consistency flags derived from the underlying response set. If prior polarity outputs are present, a current-pointer in the profile is advanced to reference the new values while the previous values are retained in a polarity session history for longitudinal analysis. Values are clamped to prescribed ranges before persistence, and smoothing or aggregation can be applied when multiple sessions occur within a configured window. The update is executed idempotently using a hash of the validated response payload to avoid duplicate commits, and emits an update event that makes the current polarity outputs available to downstream components for user-interface rendering, Sanctuary interactions, and readiness and compatibility adjustments, while honoring storage, access-control, and privacy constraints defined for the profile store.

[0174] Figure 7 illustrates a flowchart for operating an adaptive emotional reflection engine. In step S700, the engine receives, from a user device, emotional reflections, ritual completion logs, unsent message contents, and emotional state selections generated within a Sanctuary interface. In step S702,

one or more processors update Sanctuary sub-modules based on the received inputs, including at least a Stillness Mode module, an Emotional Mirror module, a Whisper Window module, a Ghost Mode module, an Archive of Self module, and an Alignment Compass module. In step S704, the processors compute a Sanctuary stability score on a bounded scale using sub-metrics including stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment. In step S706, at least one of a readiness score and a compatibility score associated with the user is adjusted based on the Sanctuary stability score so that Sanctuary behavior exerts a defined bounded influence on relationship analytics.

[0175] A relationship state engine maintains Relationship Tabs for user pairs across predefined stages such as talking, friends, dating, and extended commitments, updates status based on interaction data and analytical scores, and triggers context-aware prompts and joint rituals at transitions. A CoupleSong feature is managed by a SongMaster and staged SongVersions, is activated via dual-consent signals, and advances according to elapsed time, Sanctuary ritual activity, and Relationship Tab transitions while enforcing a defined progression model. The polarity engine computes normalized masculine and feminine scores and a balance index, provides visualizations and micro-reflection prompts, and updates user profiles with current polarity outputs. A signature derivation pipeline transforms multi-source user inputs into a multi-dimensional emotional signature, maps that signature to a frequency fingerprint comprising a personalized tone palette, and applies the fingerprint to select or modulate audio in Symphonic Match and Sanctuary contexts to tailor the emotional environment.

[0176] A persistence layer stores relational entities that can include user records, answer records, readiness scores, polarity sessions, archetype profiles, shadow indicators, relationship tabs, couple songs, compatibility scores, and Sanctuary logs. Explicit relationships among the entities are maintained to represent emotional states, interactions, and relationship journeys over time. Analytics services

execute composite and longitudinal queries across these entities and links to generate emotional profiles and evolution metrics for individuals and couples. Resulting insights are delivered to user-facing and reporting interfaces for personalized guidance, risk labeling, match suggestions, and feature triggering within an emotional operating framework.

[0177] The reference label S700 denotes an operation in which platform servers receive, from a user device, emotional reflections authored by the user, logs indicating completion of defined rituals, contents of unsent messages composed within a protected drafting surface, and selections of current emotional states. These inputs are generated within a Sanctuary interface and are ingested as structured events for subsequent updating of Sanctuary sub-modules and computation of Sanctuary metrics.

[0178] In S704, one or more processors compute a Sanctuary stability score on a bounded numerical scale by evaluating sub-metrics derived from Sanctuary activity. The sub-metrics include stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment. Each sub-metric is normalized to a common range, weighted according to predefined coefficients, and adjusted using time decay and smoothing so that recent but stable behavior contributes more than sporadic spikes. Detected contradictions or abrupt swings introduce bounded penalties, and missing inputs are handled by imputation rules that avoid inflating the score. The weighted result is aggregated and clamped to the defined bounds to yield the Sanctuary stability score, which is timestamped for longitudinal analysis and used in subsequent adjustments of readiness and compatibility.

[0179] Figure 8 illustrates a flowchart for relationship state management in which, at S800, the system maintains for each pair of users a Relationship Tab that stores a current relationship status selected from multiple predefined stages including at least talking, friends, dating, and lasting intentions; at S802,

the system receives, from at least one user device, interaction data including communication frequency, Sanctuary joint ritual participation, and explicit user selections indicative of relationship progression; at S804, a relationship state engine updates the Relationship Tab to transition between the predefined stages based on the interaction data and at least one of a readiness score and a compatibility score for the pair of users; and at S806, the system triggers context-specific emotional prompts and Sanctuary joint rituals responsive to each transition recorded in the Relationship Tab.

[0180] Figure 9 illustrates a flowchart for generating and evolving a CoupleSong for two users. At S900, the system creates a CoupleSong record linked to a SongMaster and to multiple SongVersions, each mapped to a respective stage of relationship progression. At S902, double consent signals from both users authorize activation of the Symphonic Match feature. At S904, an initial song stage is set for the CoupleSong and the SongVersion corresponding to that initial stage is provided for playback on each user device. At S906, the song stage is advanced under a stage progression model in response to at least one of elapsed time, Sanctuary ritual completion, and Relationship Tab status transitions. At S908, the SongVersion played to the users is updated based on the advanced song stage so the playback reflects the evolution of the relationship.

[0181] At S902, a coordination module receives two distinct consent signals, one from each user associated with a CoupleSong record, authorizing activation of a Symphonic Match feature. Each consent signal is generated by a consent interface on a respective user device and includes user and CoupleSong identifiers, a session nonce, a timestamp, and an authentication token or cryptographic signature sufficient to verify user identity and session integrity. The module records the first-arriving consent in a pending state and establishes a validity window; the pending consent remains inactive until a corresponding second, independently authenticated consent for the same CoupleSong is received within the window. Upon receipt of the second consent, the module verifies user pairing, checks for

revocation flags and duplicate submissions, confirms policy constraints such as age and regional permissions, and resolves any race conditions using an atomic commit to transition the consent tuple to an active state.

[0182] Figure 10 illustrates a flowchart that begins at a start state and proceeds sequentially through S1000, S1002, S1004, and S1006 to an end state. In S1000, for a first user, input data is collected comprising at least an archetype identifier, a shadow pattern type, polarity scores, astrology parameters, numerology parameters, emotional logs, and regulation strategy selections. In S1002, one or more processors process the collected input data to derive a multi-dimensional emotional signature. In S1004, the emotional signature is mapped to a frequency fingerprint that defines a personalized tone palette including at least one of sacral, heart, and mind frequency themes. In S1006, the frequency fingerprint is used to select or modulate audio content in at least one of a Symphonic Match system and a Sanctuary system for the first user, with the output of each step feeding the next.

[0183] At S1000, a computing system acquires, from a first user device and authorized data sources, structured input data for a first user and commits the data to a normalized schema associated with a persistent user identifier. The collected dataset includes at least an archetype identifier assigned from a prior assessment, a shadow pattern type representing self-sabotage tendencies, polarity scores comprising normalized masculine and feminine measures and a balance index, astrology parameters derived from user-provided birth data and ephemeris lookups, numerology parameters computed from user-provided name and birth date, time-stamped emotional logs produced within guided reflection interfaces, and explicit selections of preferred emotional regulation strategies. The system records provenance, timestamps, and version tags for each field, validates formats and value ranges, resolves duplicates, encrypts the payload at rest and in transit, and maps each element to canonical codes and bounded numerical scales suitable for downstream processing. Missing or contradictory items are

flagged with completeness and consistency metadata, and default or deferred placeholders are applied without blocking ingestion. The resulting user-linked record is persisted as a transactionally consistent entry for subsequent derivation of an emotional signature and frequency fingerprint, as well as for readiness, polarity, and compatibility analytics.

[0184] At S1002, one or more processors transform the heterogeneous input data from S1000 into a multi-dimensional emotional signature by executing a feature-engineering and fusion pipeline. The pipeline includes schema validation, de-duplication, timestamp alignment, and modality-specific normalization, such as min–max scaling for questionnaire scores, z-score standardization for behavior-derived rates, and bounded encoding of astrology and numerology parameters. Categorical constructs such as archetype identifiers and shadow pattern types are embedded into fixed-length vectors; polarity scores are normalized to a common numeric domain; emotional logs are converted into temporal aggregates using recency-weighted decay and volatility measures. Missing or partial entries are imputed using model-based or distributional methods, while contradiction and inconsistency flags generated upstream are carried forward as penalty weights.

[0185] The processors synthesize the normalized features using a fusion model comprising trained machine-learning encoders, rule-weighted components, or a hybrid thereof to yield a latent vector in a predetermined dimensionality. The latent vector represents interpretable axes, including at least affect valence, arousal, attachment orientation, regulation capacity, shadow activation likelihood, archetypal resonance, communication orientation, and polarity balance, together with latent subspace components that capture cross-modal interactions. Outputs are calibrated to bounded numeric ranges and are accompanied by confidence scores and data-quality indicators derived from input completeness and consistency signals. Temporal smoothing or filtering is applied so that the signature reflects both current state and stable traits without overreacting to transient fluctuations.

[0186] The resulting multi-dimensional emotional signature is time-stamped and versioned, linked to the user profile, and stored for downstream use. This representation serves as the canonical input for subsequent mapping to a frequency fingerprint at S1004, and it remains updateable in response to new logs, questionnaire sessions, or relationship-state changes while preserving prior versions for longitudinal analytics.

[0187] With respect to S1004, processing circuitry maps a derived multi-dimensional emotional signature for a user to a frequency fingerprint that defines a personalized tone palette. The mapping yields parameter values and theme weights that correspond to one or more frequency themes selected from sacral, heart, and mind. The resulting fingerprint specifies constraints and modulation targets, including pitch regions, timbral emphasis, rhythmic density, and spatialization cues, so that subsequent audio selection or synthesis conforms to the user's tone palette while remaining bounded within platform-defined ranges. The tone palette is persisted with versioning for repeatability, is updatable as the user's emotional signature evolves, and is referenced by audio engines to render or adjust content in real time in Symphonic Match and Sanctuary contexts.

[0188] Figure 11 illustrates a start-to-end flow for managing relational emotional analytics data. At S1100 the system stores, in a data store, relational entities including user records, user answer records, readiness scores, polarity session records, archetype profiles, shadow signals, relationship tab records, couple song records, compatibility scores, and Sanctuary log entries. At S1102 one or more processors maintain explicit data relationships linking these relational entities so as to reflect emotional states, interactions, and relationship journeys of users over time. At S1104 analytics queries are executed over the relational entities and their data relationships to derive composite emotional profiles and longitudinal evolution metrics for users and couples. At S1106 the system outputs, to at least one user interface or reporting interface, insights derived from the composite emotional profiles and evolution

metrics for use in personalized guidance and feature triggering within the emotional operating system. The sequence proceeds from S1100 to S1106 and can iterate so that outputs from S1106 drive updates to the stored entities and maintained relationships in S1100 and S1102.

[0189] In some embodiments, at S1102, one or more processors maintain explicit data relationships that link stored relational entities so that evolving emotional states, user interactions, and relationship journeys are represented over time. The processors persist typed, time-stamped, and versioned associations among user records, user answer and log records, readiness and compatibility scores, polarity session outputs, archetype and shadow profiles, Sanctuary artifacts and stability metrics, Relationship Tab states, and CoupleSong assets. The maintenance operation creates, updates, and retires links upon new events, preserves prior versions to maintain historical continuity, and enforces referential integrity and provenance with stable user and pair identifiers. Link attributes can encode directionality, edge type, weight, and effective intervals to capture semantics such as generated-by, applies-to, paired-with, progressed-to, and influences, thereby enabling reconstruction of timelines and influence pathways for longitudinal analytics. Indexed relationship stores and edge-level access controls facilitate efficient queries while honoring privacy and access policies.

[0190] S1106 denotes operations in which one or more processors generate and transmit insights, derived from composite emotional profiles and longitudinal evolution metrics, to at least one user interface or reporting interface. The system packages analytics outputs such as trend indicators, score deltas, stability markers, and predicted risks or opportunities, associates them with relevant user or couple records and timestamps, and delivers them to endpoints including mobile application views, web dashboards, or administrative consoles. The receiving interface renders context-appropriate guidance and triggers features, for example personalized emotional prompts, compatibility tier indicators, readiness updates, Sanctuary ritual suggestions, or polarity feedback, in accordance with current

relationship states and policies. Delivery is confirmed by interface acknowledgment or a timed completion, and a corresponding output log entry is recorded to enable traceability, auditing, and feedback-driven refinement of subsequent guidance within the emotional operating system.

[0191] In one embodiment the system receives user response data from a first user device that includes answers to archetype and shadow assessments, a readiness questionnaire, a polarity questionnaire, and explicit relationship status selections. The received responses are parsed and stored in a transient data structure for scoring. A readiness scoring module computes a raw readiness sum from weighted user answers, where each question contributes a predefined weight reflecting its diagnostic value. The module detects inconsistency clusters and contradiction flags by applying rule-based checks and statistical outlier detection across semantically related items; detected inconsistencies generate penalty terms that reduce the raw sum. Polarity stabilizers operate on polarity questionnaire outputs by normalizing masculine and feminine component scores and applying damping factors to extreme values, producing a polarity balance index that is incorporated into readiness normalization. The readiness score is produced by applying penalties and stabilizers, then normalizing the resulting value to a bounded numerical scale (for example 0–100) and storing the score in the user's profile.

[0192] To normalize Rraw to a bounded 0–100 scale, the normalization denominator is derived from the number of readiness questions N and the maximum possible weighted per-question contribution. In a typical implementation the maximum per-question contribution is Wi_max * M for the question's weight and answer range; the aggregate maximum is thus Dmax = SUMi (Wi_max_i * M). For efficiency, when weights are normalized such that SUMi Wi = N or when identical maximum weights are applied, the denominator can simplify to N * Wref * M. The normalized readiness score Sready is computed as Sready = clamp((Rraw / Dmax) * 100, 0, 100), where clamp limits the value to the 0–100 range. In alternative implementations the denominator is adjusted to account for unanswered questions:

unanswered questions are excluded and N is reduced to Nanswered, and Dmax is computed only over answered question weights, preserving normalization integrity.

[0193] Numerical smoothing and polarity stabilizers are applied prior to final clamping to reduce volatility between successive questionnaire sessions. For example, exponential smoothing combines a prior readiness score Sprev and the newly computed score Sready_new to produce Sready_final = alpha * Sready_new + (1 - alpha) * Sprev, where alpha is a configurable smoothing constant. The final readiness score is stored in the user profile and is tagged with a timestamp and metadata including inconsistency flags, penalty values, and the set of contributing question identifiers. The stored readiness score is provided to downstream modules for use in compatibility calculations, relationship state transitions, and selection of context-specific emotional guidance prompts, with the architecture enforcing that Sanctuary-derived adjustments can only alter the readiness score within predefined bounded influence limits.

[0194] Each sub-score s_i is assigned a weighting w_i such that the weights across the chosen sub-scores sum to a defined total (for example 1.0). The raw aggregate score is computed as Aggregate = sum_i (w_i * s_i). Prior to final aggregation, inconsistency penalties are computed and applied: detected contradictions, insufficient internal consistency in one or both users' inputs, or flagged data integrity issues produce penalty values P that reduce the aggregate. Thus a post-penalty aggregated value is computed as A' = max(0, Aggregate - P), enforcing a minimum of zero.

[0195] If one or more sub-scores are unavailable, the system renormalizes the remaining weights proportionally so that the effective weights sum to the defined total, or it imputes missing sub-scores using estimation strategies with reduced confidence. The post-penalty value A' is mapped to a bounded compatibility scale (for example, 0–100) using a linear or non-linear normalization function and can be

adjusted by ancillary metrics, such as a Sanctuary stability score, subject to a bounded influence factor alpha:

[0196] FinalScore = (1 - alpha) * normalized(A') + alpha * SanctuaryAdjustment,

[0197] Wherein alpha is constrained to a predefined maximum influence. The FinalScore is associated with tier labels and user-facing descriptors according to predetermined ranges. Weightings, penalty magnitudes, mapping functions, and alpha are configurable, tunable through analytics or machine learning applied to feedback data, and versioned to support iterative calibration.

[0198] In one embodiment, the Sanctuary subsystem is implemented as one or more processors executing program code that monitors user interactions with a Stillness Mode interface and maintains temporal usage records for each user. Each invocation of Stillness Mode generates a timestamped usage event that is appended to a sliding-window buffer or to a time-indexed usage table stored in the user's Sanctuary log. A window parameter and a threshold parameter are maintained in configuration storage and are configurable as global defaults or individualized per user; for example, the window parameter can be seven days and the threshold parameter can be five uses. The subsystem periodically (or upon each new usage event) computes the number of Stillness Mode events whose timestamps lie within the most recent window and compares that count to the threshold. When the count meets or exceeds the threshold, the subsystem generates a Stillness Trigger signal.

[0199] Responsive to a Stillness Trigger signal, the processors apply a defined readiness increment to the user's readiness score. The readiness increment is implemented as a fixed point value, a percentage of the remaining distance to the maximum readiness value, or a value scaled by a user-specific adherence multiplier derived from historical ritual consistency. For example, the readiness increment can be +3 points on a 0–100 readiness scale or 5% of the gap between the current readiness score and 100. Prior to persisting the adjusted readiness score, the subsystem enforces global bounding rules so

that Sanctuary-derived adjustments contribute no more than a configured percentage influence to the overall readiness metric (e.g., Sanctuary contributions limited to 20% of the readiness score change), and the adjusted readiness score is normalized and stored in the user's profile.

[0200] Concurrently with increasing the readiness score, the Stillness Trigger causes a decrement in a stored shadow activation metric, which represents the user's current propensity for self-sabotaging or destabilizing behaviors. The decrement is performed as a fixed reduction, a proportional reduction (for example, reducing the shadow activation value by 10%), or is computed using a decay function that yields diminishing returns upon repeated triggers. The subsystem enforces a minimum threshold on the shadow activation metric to prevent negative values and logs the magnitude and timestamp of each decrement event.

[0201] To mitigate abuse and avoid artificial inflation, the subsystem supports cooldown periods, escalating thresholds for repeated rapid triggers, and cross-validation with other Sanctuary sub-metrics (such as reflection depth and ritual participation) so that a Stillness Trigger only produces full effect when accompanying behavioral signals indicate authentic engagement. All changes are recorded in the relational data store and surfaced to other engines (e.g., readiness scoring engine, relationship state engine) so that downstream analytics and UI components reflect the updated readiness and shadow activation values while preserving auditability and user privacy controls.

[0202] The module computes sub-metrics including a Theme Coherence score reflecting consistency of identified themes across reflections, an Attachment Index quantifying the balance between approach and avoidance signals, and a Tension Index capturing frequency and magnitude of escalation events and sentiment volatility. Each sub-metric is normalized to a bounded scale and associated with consistency flags when contradictory signals are detected (for example, expressions of strong desire for intimacy immediately followed by rigid distancing language). The Emotional Mirror applies weighting rules to

combine sub-metrics into update values for the Sanctuary stability score and the curtain stability score. The Sanctuary stability score aggregates sub-metrics indicative of reflective depth, emotional regulation, and pattern neutrality; increased coherence and a balanced Attachment Index raise the stability score, whereas an elevated Tension Index or recurring contradiction flags reduce it. The curtain stability score specifically represents the robustness of interpersonal boundaries and privacy readiness, decreasing with repeated exposure of boundary-weakening language and increasing with reflections indicating clear limits, self-protective strategies, or successful ritualized boundary work.

[0203] Temporal smoothing mechanisms, such as exponential moving averages, mitigate abrupt score fluctuations. A bounded-influence constraint limits Emotional Mirror updates to a predefined proportion of the Sanctuary internal metrics. Thresholds and hysteresis govern state transitions so that prompts or interventions are issued only when sustained score patterns are identified. The module records anonymized feature vectors and update rationales to enable auditability and to generate human-readable reflection feedback presented to the user, including mirror prompts that reference detected themes, suggested boundary rituals when curtain stability falls below a defined threshold, and recommended stillness or unsent-message activities when tension patterns indicate escalation risk. User-configurable privacy settings control retention and sharing of reflection data.

[0204] Whereinoperating the Sanctuary subsystem comprises executing a Whisper Window module that ingests unsent emotional messages and, responsive to processing the messages, reduces a compatibility penalty component and increases an emotional honesty metric associated with the first user. The Whisper Window module receives text, audio, and structured journal inputs composed by the first user within the Sanctuary interface but intentionally withheld from transmission to other users. Upon ingestion the module performs preprocessing including tokenization, noise reduction for audio, language detection, and optional local encryption. A natural language processing pipeline applies

sentiment analysis, emotional valence extraction, disclosure detection, first-person reference density, and temporal framing classification to derive quantitative features such as sentiment polarity, intensity, vulnerability score, and thematic coherence. The module further computes an unsent message authenticity index by combining lexical markers of sincerity, consistency with historical profile vectors, and self-referential affirmation counts.

[0205] Processing outputs feed a penalty modulation function that reduces a compatibility penalty component previously applied to the first user's compatibility score. The modulation function maps the vulnerability score and authenticity index to a penalty reduction factor via a monotonic bounded transformation, where the maximum allowable reduction is constrained by a configurable influence parameter to prevent destabilizing score swings. The reduction is smoothed using exponential moving averaging so that transient unsent expressions adjust penalties gradually in proportion to demonstrated reflective behavior. When unsent messages exhibit pronounced dissonance with stored archetype or shadow pattern signals, the module can instead flag contradiction indicators and apply consistency penalties; these flags are presented to the user as micro-reflection prompts.

[0206] Concurrently, the Whisper Window updates an emotional honesty metric associated with the first user. The metric aggregates per-entry authenticity indices, weighted by reflection depth and temporal recency, and is normalized to a bounded scale. Increases in the emotional honesty metric are recorded in the user profile and propagated to Sanctuary internal metrics such as reflection depth and shadow neutrality. The system logs provenance metadata and maintains an immutable audit trail of metric updates while optionally preserving source content only in encrypted ephemeral caches or on-device storage in accordance with user consent settings.

[0207] Results of Whisper Window processing inform downstream operations: readiness and compatibility scoring engines incorporate the adjusted penalty component and updated honesty metric

when computing final scores; UI components surface tailored guidance, including stillness prompts, mirror reflections, and suggested unsent message revisions; matchmaking rules are configured to weight honesty improvements when ranking potential matches. Machine-learned classifiers used by the Whisper Window are retrained periodically on anonymized, consented datasets to refine vulnerability and authenticity detection while adhering to privacy safeguards.

[0208] The Sanctuary subsystem implements a Ghost Mode submodule that monitors, quantifies, and responds to avoidance or withdrawal behaviors exhibited by a user. Ghost Mode ingests signals including but not limited to: explicit activation events (user-selected Ghost Mode entry), durations of prolonged non-response to communications, unsent-message drafts left in the Whisper Window, reduced ritual participation logged in Sanctuary ritual records, and sudden declines in communication frequency relative to a user-specific baseline. These inputs are recorded as time-stamped events in a Ghost Log and summarized into a Ghost Usage metric computed over a sliding time window T (for example, 14 or 30 days). Ghost Usage is a weighted sum of event types with weights w1...wn reflecting relative behavioral importance, and incorporates time decay so that older events contribute less: $GhostUsage = sum_i w_i * e^{-\lambda(t_{now} - t_i)}$.

[0209] Define a usage threshold U_{thr} for each user. U_{thr} is either static or dynamically adapted from historical behavior using percentile analysis or a learned baseline. Overuse is signaled when $GhostUsage > U_{thr}$. Overuse magnitude OM is computed as $OM = (GhostUsage - U_{thr})/U_{thr}$, bounded below at zero and optionally transformed by a non-linear function (e.g., sigmoid or square root) to produce a graduated response.

[0210] When $OM > 0$, the subsystem computes a compatibility adjustment and a polarity stabilization adjustment. The compatibility adjustment applies a negative modification to the compatibility score C_{pair} for affected pairings involving the user. The penalty P_C is computed as $P_C = clamp(\alpha * f(OM), 0,$

P_{max}), where α is a configurable scale factor, f is a chosen response curve, and P_{max} is a system-imposed limit (for example, no more than 15% of the current compatibility score). The adjusted compatibility score $C_{adj} = C_{pair} - P_C$, with C_{adj} clamped within the permitted compatibility range. Penalties are applied proportionally across active pairings or weighted by relationship stage, and each penalty is logged with a rationale to support auditability.

[0211] Concurrently, a stabilizing adjustment is applied to the user's polarity metric to encourage rebalancing rather than amplify imbalance. Given a polarity balance index PBI derived from normalized masculine and feminine component scores (M_{norm}, F_{norm}), the stabilization applies a dampening of the dominant component:

[0212] $M_{adj} = M_{norm} - \beta * OM * \text{sign}(M_{norm} - F_{norm}) * |M_{norm} - F_{norm}|$,

[0213] $F_{adj} = F_{norm} + \beta * OM * \text{sign}(M_{norm} - F_{norm}) * |M_{norm} - F_{norm}|$,

[0214] Where β denotes a stabilization gain and the resulting values are renormalized to maintain validity. Alternatively, the subsystem is configured to blend PBI toward a neutral midpoint by

[0215] $PBI_{adj} = PBI + \gamma * OM * (PBI_{neutral} - PBI)$,

[0216] With γ bounded to prevent loss of user-specific polarity signals.

[0217] Penalty and stabilization effects are reversible: GhostUsage decays and if subsequent behavior falls below U_{thr} the system reduces or removes adjustments according to a defined recovery schedule. All parameter values, thresholds, and transformation functions are configurable and can be personalized via machine-learned models to minimize false positives and support transparent user feedback and coaching prompts.

[0218] Stillness consistency quantifies temporal regularity and duration of stillness sessions recorded in the Sanctuary. The metric is computed from session frequency, mean session duration, and variance across a configurable rolling time window; higher frequency and reduced variance yield increased stillness consistency values. Emotional mirror clarity measures the degree to which mirror reflections (user-authored descriptions of current emotion) are coherent, specific, and semantically aligned with prior baseline language; natural language processing techniques produce a clarity score based on lexical specificity, affective polarity agreement, and the signal-to-noise ratio of the reflection text. Shadow neutrality captures the diminution or absence of identified self-sabotaging patterns by comparing present behavior indicators against previously classified shadow pattern types; reduced recurrence and attenuated intensity of shadow-flagged behaviors raise the shadow neutrality value.

[0219] Polarity balance is computed from normalized masculine and feminine energy scores and a polarity balance index derived from the polarity questionnaire; the sub-metric reflects closeness to a configured target balance and is inversely proportional to the absolute deviation from that target. Reflection depth assesses cognitive and affective elaboration within reflections using features such as token count, causal language markers, perspective-shifting expressions, and depth-of-processing signals from linguistic analysis. Emotional volatility is derived from variance and abruptness metrics of reported emotional states over time; smoothing filters and volatility dampeners reduce sensitivity to transient spikes while preserving meaningful change signals.

[0220] Ritual participation measures completion rates, timeliness, and joint-participation ratios for Sanctuary rituals and exercises; higher completion and partnered engagement increase the participation sub-score. Relationship alignment quantifies congruence between the user's stated relational goals, Relationship Tab status, and partner-reported indicators; alignment is higher when intent, interaction patterns, and partner signals are mutually consistent.

[0221] To prevent abrupt changes and oscillation, the system applies temporal smoothing and hysteresis. Temporal smoothing is implemented as an exponential moving average applied to the Sanctuary stability score and to the influence factors α1 and α2, such that momentary fluctuations have limited effect. Hysteresis is implemented via separate entry and exit thresholds (Tentry > Texit) for each application, so that the influence is engaged only after sustained stability and withdrawn only after sustained reduction, thereby reducing sensitivity to transient inputs. Inconsistency penalties and polarity stabilizers are computed before blending and are preserved, ensuring that Sanctuary influence cannot fully override foundational data-quality checks.

[0222] All parameters (thresholds, αmax values, smoothing time constants) are stored in configuration data and are adjustable per deployment; adjusted scores are clamped to the original scoring scale (for example, 0–100) and persisted in the user profile for use in subsequent matching, guidance, and relationship-state operations.

[0223] The polarity balance index P is recorded as a polarity output in the user profile and provided as an input to one or more components of the Sanctuary subsystem and to compatibility scoring processes. Within the Sanctuary subsystem, P is incorporated into Sanctuary sub-metrics used for stability calculation: the polarity balance contributes directly to the polarity sub-metric and indirectly influences shadow neutrality and reflection depth calculations by modulating confidence weights applied to recent emotional reflections. Sanctuary modules such as Stillness Mode, Emotional Mirror, and Alignment Compass use P to adapt prompt selection and ritual difficulty; for example, when P falls below a predefined threshold it triggers micro-reflection prompts and polarity rebalancing rituals, whereas when P exceeds that threshold it enables invitations to vulnerability-focused mirror exercises. The Sanctuary stability score S is computed as an aggregation of sub-metrics including the polarity sub-metric; P is constrained to exert a bounded influence on S by applying a maximum contribution factor (for example,

not exceeding 20% of S) and by normalizing contributions so that Sanctuary behavior cannot dominate other stability inputs.

[0224] Used both as a direct compatibility factor and as a modifier applied to weighted sub-scores. Pairwise computations derive a complementary polarity metric C from the two users' P values together with the directionality of M and F, and C is incorporated as a sub-score within the compatibility aggregation. Additionally, P adjusts weightings for archetype-match and communication sub-scores to reflect that polarity complementarity or imbalance influences real-world relational dynamics; these adjustments are bounded so that polarity-related inputs contribute only a predefined percentage of the overall compatibility score. Triggers based on thresholded P values generate context-specific user-interface behaviors, such as polarity visualizations, micro-reflection prompts, and compatibility warnings.

[0225] A composite Sanctuary activity score is computed as a weighted aggregation of the normalized sub-scores. Weight values are static or adaptively tuned per user and are selected to reflect the relative importance of stillness, reflective processing, and closure practices (for example, w_stillness, w_reflection, w_lastlight, with w_stillness + w_reflection + w_lastlight = 1). The composite activity score is then mapped to a polarity adjustment vector that specifies proposed deltas for the normalized masculine and feminine component scores. The mapping can employ directional heuristics (e.g., prolonged stillness sessions that tend to increase grounding-identified polarity; reflective logs that exhibit expression-oriented language and tend to increase receptive polarity) or learned models trained on labeled outcome data.

[0226] Updates to polarity component scores apply smoothing and bounding. In one embodiment an exponential moving average with smoothing constant alpha (for example 0.05–0.3) blends the proposed delta with the current score to prevent abrupt swings. Updated component scores are clamped to a

permitted range (for example 0–100). The polarity balance index is recalculated from the updated components as a normalized function such as the signed difference divided by the sum or as a ratio, producing a bounded index that reflects balance and dominance.

[0227] Consistency checks detect contradictions between recent Sanctuary-inferred adjustments and stable psychometric indicators; detected contradictions trigger reduced adjustment magnitude via a consistency penalty factor. Time-decay is applied so older Sanctuary inputs exert diminishing influence unless reinforced. The system enforces a defined bounded influence of Sanctuary behavior on downstream analytics: adjustments to readiness and compatibility scores attributable to Sanctuary-derived polarity changes are limited to a configurable percentage of total score variation (for example no greater than 10–20%).

[0228] Updated polarity outputs are persisted to the user profile and exposed to user interfaces as refreshed polarity visualizations and micro-reflection prompts. Audit logs record the inputs, computed deltas, smoothing parameters, and applied penalties to enable transparency, rollback, and analytics.

[0229] In one embodiment, the system assigns a first user to an archetype selected from a predefined set of archetypes by processing user-provided psychometric responses, behavioral pattern data, communication indicators, and regulation strategy selections through an archetype engine. The archetype engine clusters incoming responses using statistical clustering, machine-learned classification, rule-based mapping, or a combination thereof to produce an archetype identifier and an associated behavioral prediction vector. Consistency flags and contradiction indicators are generated during processing to identify response patterns that reduce classification confidence and to trigger inconsistency penalties in downstream analytics. The archetype identifier and behavioral prediction vector are stored in the user's profile and linked to temporal metadata to permit longitudinal tracking and reclassification as new data are received.

[0230] The assigned archetype is used as a direct input to compatibility scoring by contributing to an archetype match sub-score. Compatibility computation aggregates a plurality of weighted sub-scores including, but not limited to, archetype match, shadow match, communication and conflict style alignment, love language/regulation alignment, and supplemental indices such as astrology and numerology sub-scores. The system computes an archetype match sub-score by comparing the first user's archetype identifier and behavioral prediction vector to candidate users' archetype identifiers and vectors, applying similarity metrics, distance functions, or semantic mapping to quantify alignment. Predefined weightings are applied to the archetype sub-score and to other sub-scores; inconsistency penalties derived from consistency flags reduce or adjust sub-score contributions. Weighted sub-scores and penalties are aggregated and normalized to produce a bounded compatibility score, with the archetype contribution constrained to a predetermined percentage of the overall score to ensure bounded influence.

[0231] The assigned archetype also informs Sanctuary subsystem behavior by parameterizing module responses and by modifying Sanctuary internal metrics. The behavioral prediction vector and archetype identifier influence selection and tuning of Sanctuary outputs including stillness prompts, emotional mirror prompts, unsent message prompts, polarity feedback, ritual suggestions, and micro-reflection sequences. For example, archetype-specific templates and probability distributions determine the cadence, intensity, and thematic content of stillness exercises and mirror prompts. Sanctuary sub-modules compute sub-metrics such as stillness consistency, reflection depth, and shadow neutrality in part using archetype-informed priors; these sub-metrics are combined to generate a Sanctuary stability score on a bounded scale. The Sanctuary stability score is applied to adjust readiness and compatibility scores within defined bounds so that archetype-driven Sanctuary activity exerts a controlled influence on relationship analytics.

[0232] Archetype assignment is revisable: updates to the archetype identifier are permitted based on subsequent Sanctuary logs, ritual completion data, unsent message contents, and longitudinal behavioral observations, thereby enabling dynamic personalization of matching and emotional guidance over time.

[0233] The composite behavioral signature is evaluated against a set of rule-based heuristics and trained classifiers to derive one or more risk indicators and opportunity indicators. Risk indicators mark likely moments of relational destabilization (for example, propensity to withdraw after perceived rejection or tendency to escalate conflict under stress). Opportunity indicators denote moments when reflective interventions are likely to increase regulatory capacity (for example, openness to mirror prompts after completion of a stillness ritual). Each indicator is assigned a severity score on a bounded scale. Severity scores that exceed predefined thresholds trigger behavioral warnings; scores that fall below those thresholds but remain above minimum bounds trigger reduced-intensity prompts.

[0234] Behavioral warnings are generated from a template library indexed by archetype-shadow pairs and severity. Templates include concise cautionary messages, recommended regulation strategies, and suggested Sanctuary actions. Sanctuary emotional prompts are selected to match both the user's archetypal learning style and the shadow's corrective needs; for example, an archetype favoring narrative processing combined with a shadow pattern of avoidance will produce a Whisper Window prompt encouraging brief unsent-message practice with guided reflection questions. Prompt selection also considers polarity balance indices and current Sanctuary sub-module states to avoid conflicting guidance.

[0235] Prompts are delivered via the Sanctuary interface modules (Stillness Mode, Emotional Mirror, Whisper Window, Ghost Mode, Archive of Self, Alignment Compass) in modalities tailored to user preference: micro-reflection text, timed stillness exercises, unsent-message drafts, or polarity

visualizations. Delivery timing leverages interaction context and relationship stage information to minimize intrusiveness. All generated warnings and prompts are logged to the user profile along with triggering data, user responses, and outcome indicators to form training data for adaptive weighting and classifier retraining. A bounded influence mechanism ensures that Sanctuary-derived adjustments to readiness and compatibility scores do not exceed a configurable percentage of the total score, preserving stability of matching metrics.

[0236] Contradictions or inconsistency flags in user responses prompt the fusion module to impose penalties and to select conservative prompts that emphasize clarity and self-observation. User feedback and ritual completion results feed a feedback loop that refines archetype-shadow template mappings and severity thresholds over time. Logged data are anonymized and aggregated for longitudinal analytics to improve prompt effectiveness while maintaining user privacy controls.

[0237] The Sanctuary subsystem maintains an Archive of Self as a time-indexed repository that records, for each user, discrete emotional logs (free-text reflections, emotion selections, intensity ratings), ritual records (ritual identifiers, scheduled times, completion timestamps, duration, partner participation flags), and reflection entries (structured prompts and unsent message drafts). Each archive entry is stored with metadata including a timestamp, context labels (e.g., trigger event, relationship partner identifier), modality (text, audio, completion flag), and a confidence metric produced by upstream parsers. The subsystem periodically processes the Archive of Self to extract longitudinal behavioral features and to derive readiness score adjustments that refine questionnaire-based readiness outputs.

[0238] Processing begins with automated feature extraction: natural language processing and sentiment analysis convert emotional logs and unsent messages into quantified attributes such as valence, arousal, regulation strategy indicators, topic clusters, and reflection depth scores (measuring

length, specificity, and evidence of insight). Ritual records are transformed into participation metrics (completion rate, average punctuality, co-ritual engagement) and ritual consistency indices computed over rolling time windows (for example 7-, 30-, and 90-day windows). Reflection entries yield indicators of self-observation quality and shadow-neutrality markers (presence or absence of self-sabotaging themes). A polarity balance sub-metric is optionally computed from reflection language and explicit polarity session outputs when available.

[0239] The subsystem applies pattern-detection algorithms to the extracted features to identify stable trends (monotonic improvement or decline), volatility patterns (recurrent large-magnitude swings in valence), periodic relapse cycles, and consistency clusters (repeated contradictory statements). Pattern detection employs rule-based thresholds, statistical trend tests, or trained classifiers to label the recent trajectory of emotional regulation and ritual engagement. Each detected pattern maps to an adjustment signal: an improving trajectory combined with consistent ritual engagement produces a positive adjustment signal; increasing volatility, recurrent contradictory reflections, or escalating shadow-theme prevalence produce negative adjustment signals.

[0240] Adjustment signals are transformed into a numerical readiness delta via a weighting function that accounts for signal strength, recency (using exponential decay), and cross-signal consistency. Inconsistency penalties are applied when Archive-derived signals contradict questionnaire-derived indicators. The resulting delta is normalized and constrained so that Archive influence on the readiness score remains bounded. For example, the subsystem enforces a maximum absolute adjustment equal to a configurable percentage of the current readiness score (e.g., ±10–15%) and also enforces hard numerical caps (e.g., ±X points). Smoothing functions, such as exponential moving averages, are applied to prevent single outlier entries from producing large swings.

[0241] Final adjusted readiness scores are written to the user profile with provenance metadata linking the adjustment to specific archive-derived patterns and the processing window. Adjustments can be computed on a predefined schedule (daily or weekly), triggered by ritual completion events, or invoked on-demand during matchmaking operations. Audit logs and user-visible explanations are retained to support transparency and optional user review.

[0242] The Alignment Compass module operates as a computational sub-module of the Sanctuary subsystem that receives Sanctuary internal metrics and user-generated inputs and maps a multi-dimensional emotional state vector for the first user into one of a plurality of alignment quadrants, including at least Connected, Guarded, Hopeful, and Drained. Inputs to the Alignment Compass module include, without limitation, Sanctuary sub-metrics such as stillness consistency, emotional mirror clarity, reflection depth, ritual participation, emotional volatility, polarity balance index, unsent message activity, and recent relationship interaction indicators. The module normalizes each input to a common scale and forms a weighted state vector, where weights are configurable and can be derived from empirically tuned parameters or machine-learned coefficients.

[0243] Classification into an alignment quadrant is performed by applying a classifier function to the state vector. The classifier function can be implemented as deterministic threshold logic, a decision tree, a logistic regression model, or a trained classifier (e.g., support vector machine, neural network). The classifier outputs a primary quadrant label and a confidence score representing classification certainty. To reduce oscillation between labels, the Alignment Compass module implements temporal smoothing and hysteresis: a time-weighted moving average of recent state vectors and a transition threshold that must be exceeded before a quadrant change is enacted. Transition events are logged with timestamps and previous and next quadrant identifiers.

[0244] Upon detecting a state transition or a sustained quadrant assignment, the Alignment Compass module computes readiness and compatibility adjustments. Adjustments are computed as bounded modifiers derived from (i) the primary quadrant, (ii) the magnitude of the transition (difference metric between preceding and current state vectors), and (iii) the classifier confidence. Each modifier is expressed as a signed scalar within a predefined range and is applied to the readiness score and/or the compatibility score by the one or more processors. The module enforces a global cap on Sanctuary-derived influence so that cumulative adjustments from Alignment Compass and other Sanctuary sub-modules contribute no more than a defined percentage of the final readiness or compatibility values. Adjustment application can be additive or multiplicative to particular sub-scores (for example increasing archetype match weight under Connected, applying a penalty to emotional regulation sub-score under Guarded), and is followed by re-normalization to maintain the bounded scale of the readiness and compatibility outputs.

[0245] Quadrant-specific behaviors are implemented as policy rules. For example: Connected yields positive readiness deltas and increases weighting on collaboration-oriented compatibility sub-scores; Guarded produces negative readiness deltas and increases inconsistency penalties applied during compatibility aggregation; Hopeful yields modest positive readiness adjustments and triggers soft prompts; Drained applies larger negative readiness adjustments, elevates volatility flags, and can suppress certain match suggestions. All quadrant assignments, transitions, computed modifiers, and resulting adjusted scores are recorded in the user profile for use in subsequent relationship-state updates, analytics, and for driving context-specific emotional guidance and Sanctuary interventions.

[0246] Transition events trigger context-specific Sanctuary activity and updated emotional guidance outputs. In response to a transition event, the Sanctuary subsystem initiates one or more joint rituals, which are synchronized activities presented to both users through their respective Sanctuary interfaces.

Joint rituals include guided stillness sessions, paired emotional mirror exercises, coordinated unsent-message prompts, synchronized ritual completion logs, and Symphonic Match audio experiences. Prior to initiation of any joint ritual that involves shared content or synchronous engagement, the system verifies consent by receiving affirmative signals from both users; double consent is required for activation of shared rituals. The system enforces a stage-progression model that prevents unlawful or premature advancement by requiring that joint-ritual prerequisites and consent conditions be satisfied.

[0247] Concurrently with ritual initiation, the system generates updated emotional prompts tailored to the new relationship stage. Emotional prompts are selected from a repository of stillness prompts, emotional mirror prompts, unsent message prompts, polarity feedback, and micro-reflection prompts and are ranked by a selection engine that considers the pair's readiness score, compatibility score, polarity balance index, Sanctuary stability score, and recent behavioral patterns. The Sanctuary stability score is recalculated using recent ritual participation, reflection depth, and volatility metrics and is applied with a bounded influence to adjust readiness and compatibility values used in prompt selection.

[0248] All relationship transitions, ritual activations, consent records, and generated prompts are logged to the Relationship Tab and Sanctuary logs. These records are available to analytics modules to support longitudinal evolution metrics, to drive subsequent personalized guidance, and to ensure that future transition decisions incorporate historical context and user privacy constraints.

[0249] In one embodiment the system computes a joint Sanctuary influence (JSI) for a pair of users linked by a Relationship Tab by combining individual Sanctuary internal metrics, ritual completion data, and relationship-stage weightings to produce a bounded increment to the pair's compatibility score. For each user i, a Sanctuary stability score SS_i is maintained from sub-metrics including stillness consistency, emotional mirror clarity, ritual participation, and reflection depth. For a defined shared ritual r, the system records completion flags $C_{i,r}$ and timestamp $t_{i,r}$ in the Relationship Tab. A ritual

completion multiplier R_r is set to 1 when both users register completion within a predefined synchronized time window ΔT_r and when double-consent verification signals are present; R_r is reduced toward zero if one or both completions fall outside ΔT_r or fail verification.

[0250] For each ritual r, a per-ritual influence value I_r is computed as:

[0251] * R_r

[0252] WhereW_r is a preconfigured ritual weight reflecting ritual significance and $f(SS_1,SS_2)$ is a symmetric aggregation function (for example the arithmetic mean or a geometric mean) of the two Sanctuary stability scores, optionally adjusted by consistency flags to penalize detected inconsistencies or contradictory logs. The system aggregates influences across a set of recent shared rituals R_{set} with an exponential time decay factor α to emphasize recent joint activity:

[0253] $JSI_{raw} = \Sigma_{r \text{ in } R_{set}} \alpha^{\Delta t_r} * I_r$

[0254] WhereΔt_r is the elapsed time since ritual r completion.

[0255] To ensure predictable behavior and limit downstream effects, the JSI contribution to compatibility is bounded by a configurable cap C (expressed as a percentage of the existing compatibility score). The adjusted compatibility score Compatibility' is computed as:

[0256] $Compatibility' = Compatibility + \min(C, Compatibility * g(JSI_{raw}))$

[0257] Where$g(\cdot)$ is a normalization function (for example a sigmoid or clipped linear mapping) that maps JSI_{raw} into a bounded scalar suitable for percentage application. In particular embodiments $g(JSI_{raw}) = clamp(k * JSI_{raw}, 0, 1)$ with scaling factor k chosen to map expected JSI ranges into [0,1].

[0258] The system further applies safeguards against gaming: inconsistency penalties reduce I_r when sensor corroboration or message contents contradict logged ritual participation; repeated rapid

completions trigger rate limits; and privacy-preserving aggregation stores only flags and normalized scores in the Relationship Tab. The JSI and its constituent per-ritual records are persisted with temporal stamps to enable longitudinal analytics, UI presentation of joint ritual impact, and decay-driven reversals if joint engagement lapses, thereby providing a bounded, auditable mechanism by which shared Sanctuary behavior produces incremental, stage-aware increases in pairwise compatibility.

[0259] Progression between stages is controlled by a stage progression engine configured to enforce a stage progression model that prevents skipping or unauthorized advancement. Advancement from a current stage to a subsequent stage is gated by satisfaction of one or more gating conditions selected from Sanctuary ritual completion, Relationship Tab updates, and joint reflections produced within the Sanctuary subsystem. Sanctuary ritual completion is determined by evaluating Sanctuary ritual logs for both users against ritual definitions and participation thresholds; completion requires individual ritual actions, paired ritual participation events, or a combination thereof. Relationship Tab updates are evaluated by inspecting the Relationship Tab record for the pair and detecting transitions between predefined relationship stages (for example, talking, friends, dating, extended intentions), where an explicit user selection or an inferred transition based on interaction data satisfies the gating criterion. Joint reflections are detected by aggregating Sanctuary-subsystem reflection entries created by each user and applying content-matching, timestamp proximity, or sentiment alignment rules; in some embodiments joint reflection gating requires that both users submit reflections within a defined window and that a joint reflection merge process produces a shared reflection entry meeting minimum depth or alignment metrics.

[0260] All progression events are recorded in the CoupleSong history and linked to Relationship Tab entries and Sanctuary logs to provide auditable traces. Notifications and UI prompts are generated to inform users of available stage transitions, required actions for gating condition fulfillment, and playback

changes. The system enforces bounded progression influence from Sanctuary activity by applying configured weights when determining if ritual or reflection metrics meet gating thresholds, thereby ensuring stage advancement adheres to defined behavioral and consent policies.

[0261] In one embodiment, generation of an evolving shared song begins by deriving a personalized tone palette and a frequency fingerprint from the user's psychometric and behavioral inputs. Inputs include an archetype identifier, a shadow pattern classification, normalized polarity scores, and historical emotional logs. Feature extraction converts these inputs into a set of weighted musical attributes: core frequency bands, timbral families, rhythmic density, harmonic complexity, dynamic envelope profiles, and preferred tempo ranges. For example, archetype mappings associate archetype types with dominant frequency themes (e.g., sacral: 80–400 Hz emphasis; heart: 400–2000 Hz emphasis; mind: 2 kHz–8 kHz emphasis) and with characteristic timbres (e.g., warm strings, rounded synth pads, bright plucked tones). Shadow pattern mappings introduce modality modifiers such as tension intervals, dissonant overtones, transient irregularities, or reduced sustain to reflect self-sabotage tendencies in the sonic texture. Polarity scores modulate balance parameters: a more masculine score shifts emphasis toward a bass-range rhythmic drive and narrower stereo imaging, whereas a more feminine score shifts emphasis toward midrange-to-upper-range harmonic richness and wider spatialization. Emotional logs supply temporal dynamics by quantifying recent affective states (valence, arousal, volatility) and mapping them to tempo fluctuations, articulation intensity, and reverb/delay settings.

[0262] The system normalizes and combines attribute weights into a multi-dimensional frequency fingerprint, represented as a numerical vector across predefined frequency bands and timbral dimensions. Weighting uses bounded multipliers and normalization routines so that no single input dominates the fingerprint; inconsistency penalties and temporal smoothing limit abrupt changes between successive fingerprints. The resulting fingerprint is stored in the user profile and can be

combined with a partner's fingerprint using weighted averaging, geometric blending, or stage-dependent fusion rules to produce a pair-level fingerprint.

[0263] Tone palette generation converts the fingerprint into actionable musical directives: a set of primary and secondary frequencies, scale and mode selection, instrument palette, rhythmic templates, and mixing presets. Song selection uses similarity measures (e.g., cosine similarity or Euclidean distance) between the fingerprint and metadata of existing SongVersions to select a base version. If modification is required, DSP-based modulation applies targeted operations—equalization to emphasize fingerprint bands, spectral morphing to introduce timbral elements, tempo and groove quantization to match rhythmic templates, chord reharmonization to incorporate modality modifiers, and addition or subtraction of layers to reflect shadow- or archetype-derived motifs. All modifications respect bounded transformation parameters and user consent settings. The system iteratively updates the fingerprint and re-modulates SongVersions in response to new emotional logs and Sanctuary ritual events, enabling an evolving shared song that tracks personal and relational emotional trajectories.

[0264] The emotional guidance output may further include a "truth signal" message produced automatically by combining recent user-generated reflections, temporal polarity trends, and detected shadow pattern activity to yield a concise, context-aware insight intended to prompt targeted emotional regulation. Inputs to the truth-signal generation process comprise timestamped Sanctuary reflections and unsent message drafts, successive polarity session outputs (including normalized masculine and feminine scores and a polarity balance index), and logged shadow activations or pattern indicators (frequency, intensity, and situational triggers). These inputs are preprocessed to extract sentiment polarity, reflection depth, volatility measures, and trend vectors; shadow activity is scored according to recurrence and alignment with known shadow pattern archetypes; polarity trends are computed as directional deltas and stability indices across recent sessions. A fusion engine aggregates the

preprocessed metrics using configurable weightings and consistency penalties—similar to those applied in readiness and compatibility computations—to derive a compact diagnostic vector that emphasizes recent deviations, persistent patterns, and signals backed by robust confidence.

[0265] The message synthesis module maps the diagnostic vector to a concise textual insight constrained by a predefined character limit and structured to include (i) a factual observation grounded in the most salient metric (e.g., elevated shadow activation, increasing polarity imbalance, or repeated reflection themes), (ii) a micro-regulation recommendation tailored to the user's archetype and regulation preferences (for example, a 60-second breathing anchor for pronounced volatility, a stillness prompt for polarity imbalance, or a journaling cue to reframe shadow triggers), and (iii) a brief rationale linking the observation to the suggested action. Tone and directness of the truth signal are modulated by the user's current readiness score and the Sanctuary stability score so that users with reduced readiness or diminished Sanctuary stability receive gentler, supportive phrasing while users with greater readiness receive more forthright prompts. The synthesis module enforces content safety rules and explicitly avoids clinical diagnosis or prescriptive therapeutic language.

[0266] The truth signal is delivered to the first user's interface as an ephemeral card, notification, or embedded Sanctuary prompt and is optionally accompanied by a one-tap action (e.g., enter Stillness Mode, open Emotional Mirror, save as an unsent message, or initiate a guided micro-practice). User interactions with the truth signal—acknowledgement, dismissal, action completion, or modification—are recorded and fed back into the Sanctuary emotional reflection engine to update sub-metrics, adjust subsequent truth signal weighting, and refine personalization over time. The generated truth signals are stored in the user's profile in association with the timestamped inputs that produced them, subject to configured privacy controls, and their aggregated occurrence contributes a bounded, predefined

influence to readiness and compatibility analytics so that truth signals inform relationship guidance without dominating algorithmic assessments.

[0267] In embodiments, the method begins with ingestion of heterogeneous user-supplied and sensor-derived inputs from a user device, the inputs including psychometric questionnaire responses, behavioral pattern signals (e.g., interaction timestamps, message tone metrics), astrological parameters, numerology parameters, and explicit communication-style indicators. Ingested data is parsed and normalized into a common internal representation; missing values are flagged and imputed using conservative defaults or user-specific historical priors. The normalized representation is provided to an archetype engine, a shadow pattern engine, a polarity engine, and a readiness scoring engine implemented as software modules executing on one or more processors.

[0268] The archetype engine maps psychometric and behavioral features into a finite set of archetype identifiers using clustering or classification models (for example, centroid-based clustering, trained supervised classifiers, or embeddings compared to archetype prototypes). Each output includes an archetype identifier and a behavioral prediction vector describing likely interaction tendencies and confidence scores. The shadow pattern engine analyzes features indicative of self-sabotage or maladaptive patterns and assigns a shadow pattern type together with severity or activation metrics. The polarity engine computes normalized masculine and feminine energy scores from questionnaire responses and behavioral indicators, and derives a polarity balance index that represents relative comfort with relational presence versus absence.

[0269] Predefined weightings are applied to the plurality of sub-scores. The weightings are stored as configurable parameters and are normalized so their sum equals a predetermined constant. Inconsistency penalties are detected and applied by scanning input for contradiction flags and inconsistency clusters, including mutually exclusive selections, internally inconsistent self-reports, or

substantial variance across closely related items. Penalties are computed as bounded deductions based on severity and are scaled to prevent negative contributions. Missing or partial data are addressed by re-normalizing weights among present sub-scores or by applying imputation strategies, and confidence factors are recorded.

[0270] Weighted sub-scores and penalties are aggregated by summation and then mapped through a normalization function to produce a compatibility score within a specified numerical range (for example, 0–100). A smoothing function or bounded sigmoid is applied to reduce sensitivity to outliers and to produce stable ordering. The compatibility score is associated with a tier label determined by threshold ranges (for example, minimal/medium/elevated/excellent), where thresholds are configurable and can be derived from historical calibration data. The compatibility score, the tier label, and an explanatory breakdown of contributing sub-scores and any applied penalties are persisted to a relational store and caused to be displayed on at least one user device via a user interface component that presents the numeric score, tier label, and an optional detailed rationale for transparency.

[0271] The system implements the claimed method as an executable sequence of operations performed by one or more processors. At S400 the processors cause transmission of a readiness questionnaire to a first user device. The readiness questionnaire comprises multiple items organized to probe emotional regulation and relational preparedness, and can include Likert-scale items, binary selections, and scalar self-assessments. Each question is associated with a predefined weight reflecting relative importance to readiness; weights can be static or adaptively assigned based on prior responses, demographic parameters, or questionnaire branching logic. In some embodiments the questionnaire UI permits the user to indicate confidence or intensity for each response, and that confidence is converted into a response-specific weight.

[0272] At S402, the processors receive weighted user answers from the first user device. The received data is parsed into a response vector and stored temporarily in volatile memory. Each element of the response vector includes the question identifier, the user selection or numeric response, the associated weight, and a timestamp. Inputs can further include metadata, such as response latency and device context, which serve as ancillary consistency signals.

[0273] At S408 the finalized readiness score is stored in a persistent user profile in the data store. Stored records include the readiness score value, the raw and penalized aggregates, detected inconsistency and contradiction metadata, timestamps, and versioning of the questionnaire schema. The stored readiness score is indexed and made available to downstream modules for matching operations, compatibility calculations, dynamic guidance selection, and for generating audit logs or user-facing explanations of score components.

[0274] Answer data is received at a computing system from a first user via a questionnaire interface, free-text input fields, and optional behavioral telemetry. The answer data includes quantified responses reflecting emotional patterns (e.g., affective reactivity, recovery time), behavioral tendencies (e.g., conflict approach, attachment indicators), and regulation indicators (e.g., preferred soothing strategies, typical de-escalation behaviors). Preprocessing logic normalizes numeric responses, tokenizes and vectorizes free-text responses using natural language processing pipelines, and extracts derived features such as sentiment scores, lexical markers of avoidance or rumination, and temporal consistency metrics computed across repeated assessments.

[0275] A shadow pattern engine processes at least a subset of the same processed features to classify the first user into one of multiple shadow pattern types representing tendencies toward self-sabotage (for example, withdrawal, projection, pursuit-avoidance, attachment anxiety overwhelm). The classification is performed using supervised machine learning classifiers (for example, random forests,

support vector machines, or deep classifiers) trained on labeled training data that map feature patterns to shadow types. The engine outputs a shadow pattern type identifier and associated severity and instability scores, and is further configured to produce explanatory feature attributions indicating which inputs contributed most to the classification.

[0276] The archetype identifier, behavioral prediction vector, consistency flags, shadow pattern type, and severity scores are stored in a user profile data structure within a secure data store alongside timestamps and version identifiers to support longitudinal tracking. The stored outputs are exposed via internal interfaces to downstream modules: a compatibility scoring module that uses archetype and shadow matches, weighted by severity and consistency penalties, to compute bounded compatibility scores; a Sanctuary prompt generator that maps behavioral prediction vectors and shadow severity to context-appropriate interventions (for example, stillness prompts, unsent-message suggestions, and emotional mirror exercises); and a behavioral-warning subsystem that issues alerts or recommended mitigations when shadow severity or consistency flags exceed predefined thresholds. Periodic reassessments update stored records and can trigger model retraining or archetype definition refinement based on aggregated population data.

[0277] The computed masculine score, feminine score, and polarity balance index are recorded in a persistent user profile as current polarity outputs along with timestamps, computation metadata, and confidence indicators. Profile updates are stored in a secure data store and linked to the user's session history to enable trend analysis. The user interface presents at least one polarity visualization derived from the balance index and component scores; example visualizations include dual-gauge meters, a single radial balance indicator, or a bi-directional slider. Visualizations are rendered with contextual annotations indicating percentile ranges and recent trend arrows. Micro-reflection prompts are selected by rule-based logic and machine-learned classifiers based on threshold crossings, recent volatility, and

profile history; examples include concise journaling prompts, breath-work suggestions, or actionable micro-checks targeted to strengthen under-expressed polarity qualities. Prompt frequency and modality are adapted to user preferences.

[0278] For each pair of users, the system maintains a Relationship Tab as a persistent data record that enumerates a current relationship stage drawn from a finite set of predefined stages that includes, without limitation, talking, friends, dating, and extended-duration intentions. The Relationship Tab contains metadata including a stage identifier, a stage confidence score, a timestamp of the most recent transition, a history log of prior transitions, per-pair interaction aggregates, and a pointer to any active joint ritual or CoupleSong record. Relationship Tabs are stored in an indexed relational store and are addressable by the pair's unique user identifiers.

[0279] Interaction data is ingested as event records from one or both user devices. Event types include explicit user selections (e.g., a user pressing a "move to dating" affordance), communication events (messages sent, call duration, reply latency), and Sanctuary events (joint ritual participation, ritual completion logs, synchronized reflection submissions). Raw events are normalized and time-windowed into rolling aggregates (e.g., communication frequency per 7-day window, ritual participation count per 30-day window). The system computes an interaction score as a weighted aggregation of normalized metrics; weights are configurable and can be tuned using analytics. Temporal decay is applied so older events exert decreasing influence.

[0280] A relationship state engine evaluates transition conditions by combining the interaction score with relationship readiness and compatibility inputs associated with the pair. Readiness and compatibility are retrieved from their respective score stores and are normalized to the same bounded numerical range as the interaction score. A composite progression metric is derived by applying predefined weightings to interaction, readiness, and compatibility contributions and by applying

inconsistency penalties or stabilizing offsets when contradictions or volatile signals are detected. The engine applies gating rules wherein certain transitions require minimum thresholds on both composite metric and on one or more individual contributors (for example, readiness >= R1 and interaction score >= I1 to transition from talking to friends).

[0281] To reduce oscillation between stages, the engine implements hysteresis and debounce logic: transitions occur only after conditions persist for a predefined minimum dwell interval or when transition confidence exceeds a hysteresis threshold. Contradiction flags (for example, one user explicitly downgrading while another signals advancement) produce hold states or assign risk labels instead of initiating automatic transitions, and can trigger mediation prompts.

[0282] Upon activation, the system assigns an initial song stage according to configured mapping logic (for example, "initial", "exploration", "committed") and selects a corresponding SongVersion. The selection process applies personalization layers drawn from stored user profiles, including emotional signatures, frequency fingerprints, and expressed preferences, to modify the SongVersion. The selected audio is delivered to each user's device via streaming or secure file transfer; playback is synchronized across devices using coordinated clocking and timestamped play events, or played independently when synchronization is not required. Local caching and progressive download are employed to reduce latency and support offline playback.

[0283] Advancement of the song stage is governed by a stage progression model implemented as a finite-state machine with defined allowed transitions, guard conditions, and transition rules. Triggers for advancement include elapsed-time criteria (e.g., minimum duration at a stage), completion events recorded by the Sanctuary subsystem (e.g., joint ritual completion logs), and Relationship Tab state transitions produced by the relationship state engine. Each trigger is evaluated against progression guards to prevent premature skipping or regression; for example, a transition can be configured to

require double confirmation, a minimum elapsed interval, or satisfaction of ritual participation thresholds. Transition actions write new state and timestamp values to the CoupleSong record and append entries to the audit log.

[0284] When a stage advances, the rendering engine updates the active SongVersion by selecting a pre-authored version or generating a new mix in accordance with the SongMaster rules and current personalization vectors. Updates include modulation of instrumentation, rebalancing of sacral/heart/mind frequency bands, insertion of user-authored snippets, and crossfading from the prior SongVersion to provide perceptible evolution. The system enforces access controls and performs consent re-checks prior to distributing updated SongVersions. All changes, playback events, and consent records are stored for auditability and are exposed through user interfaces that provide playback control, stage history review, and mechanisms for opt-out or deletion requests.

[0285] Collecting input data for a first user comprises receiving an archetype identifier and a shadow pattern type together with normalized polarity scores, astrology and numerology parameters, time-stamped emotional logs, and explicit regulation strategy selections. The received inputs are converted into structured feature vectors by extracting quantitative and categorical features: archetype and shadow identifiers are one-hot encoded or mapped to archetypal centroids; polarity responses are normalized to continuous masculine/feminine axes; astrology and numerology parameters are translated into numeric indicators (planetary aspects, house emphases, life-path numbers); emotional logs are processed to generate temporal statistics (mean valence, variance, peak intensities, regulation events per unit time); regulation strategy selections are mapped to strategy effectiveness weights. All features are scaled and concatenated to form an initial multi-dimensional representation.

[0286] Processing by one or more processors derives a multi-dimensional emotional signature from the feature vectors. This processing can include application of learned mapping models or deterministic

transformation pipelines. In a model-based embodiment, a neural encoder or an ensemble of regression and classification models projects input features into a latent signature space comprising axes such as grounding (sacral strength), comforting resonance (heart strength), cognitive clarity (mind strength), volatility, regulation capacity, and shadow activation. Dimensionality reduction techniques (e.g., principal component analysis, autoencoder latent spaces) and temporal aggregation (sliding-window summaries or recurrent encodings) are used to produce a stable, multi-dimensional signature vector representing current and recent emotional state. Consistency checks and smoothing filters are applied to mitigate transient noise; confidence scores are computed based on input completeness and internal model uncertainty.

[0287] Using the frequency fingerprint to select or modulate audio content is performed by routing fingerprint parameters to a selection engine and an audio synthesis/modulation engine. The selection engine selects pre-rendered SongVersions or audio stems whose metadata matches target band emphasis and desired timbral characteristics. The modulation engine implements real-time or offline parameter adjustments—equalization, bandpass filtering, spectral morphing, dynamic range shaping, pitch micro-tuning, reverb character, and tempo scaling—to align chosen audio with the personalized tone palette. In multi-user Symphonic Match contexts, fingerprints are combined according to weighted blending or harmonic mapping rules to produce blended stems that respect each user's dominant bands while preserving overall musical coherence. Sanctuary playback employs the fingerprint to generate reflective soundscapes that adapt over successive sessions based on updated emotional logs and ritual completion, with bounded parameter ranges and smoothing to ensure perceptual continuity and minimal-latency performance. The fingerprint and associated mapping metadata are stored to support personalization and iterative refinement.

[0288] The system stores relational entities in a persistent data store as discrete records linked by explicit identifiers. Each user record includes persistent identifiers, consent flags, profile metadata, and pointers to temporal answer records. User answer records capture timestamped responses to readiness, archetype, shadow, polarity, and ritual questionnaires, including weighted answer values, consistency flags, and contradiction markers. Readiness scores, compatibility scores, polarity session records, archetype profiles, shadow signals, relationship tab records, couple song records, and Sanctuary log entries are persisted as relational rows or graph nodes with foreign-key references or edge relationships to the originating user records. Each stored entity is versioned and timestamped to enable historical reconstruction and rollback.

[0289] Analytics queries operate over the relational entities and explicit links to derive composite emotional profiles and longitudinal evolution metrics. Queries include joins across answer records, time-series aggregations (moving averages, exponential smoothing), window functions to compute trend slopes, volatility calculations (standard deviation of normalized emotion scores), and graph traversals to propagate archetype and shadow influences through connected relationship networks. Composite emotional profiles are generated by weighted aggregation of constituent sub-scores (for example, readiness, archetype coherence, shadow neutrality, polarity balance, and ritual participation), with configurable weight parameters and inconsistency penalties applied. Longitudinal metrics include trend indicators, stability indices, engagement decay rates, and synchronization measures for coupled users (for example, cross-correlation of ritual completion timestamps).

[0290] Derived insights are output to at least one user interface or reporting interface. Output formats include numeric scores with tier labels, time-series visualizations, risk labels, suggested interventions, and feature triggers. Feature triggers can include generation of personalized emotional guidance prompts, activation of Sanctuary micro-features, initiation of stage transitions in a relationship tab, or

advancement of a couple-song stage. The system enforces bounded influence by normalizing Sanctuary-derived adjustments and limiting per-period score contributions to preconfigured percentages. Machine-learned models or rule engines are configured to consume the relational entities and analytics outputs to refine weightings and surface individualized recommendations. APIs expose query endpoints for real-time retrieval, and audit logs record analytic executions and outputs for compliance and debugging. Variations support deployment on relational or graph databases, distribution across multiple processors, and configurable retention policies for historical entities.

Claims

1. A computer-implemented method for multi-layer emotional cognition modeling and training of an artificial intelligence agent using human relational frameworks, the method comprising: implementing, by one or more processors, an emotional operating system including structured models, training pipelines, and simulation engines configured to interpret, classify, predict, and simulate human emotional behavior across time; modeling, by the emotional operating system, a growth layer representing plant-state variables; modeling, by the emotional operating system, an attachment layer representing pet-state markers; modeling, by the emotional operating system, a relational ecosystem layer representing relationship-level ecosystem markers; modeling, by the emotional operating system, an archetype classification layer representing archetype probabilities; modeling, by the emotional operating system, a shadow pattern detection layer representing shadow flags; modeling, by the emotional operating system, a polarity state engine representing polarity metrics; modeling, by the emotional operating system, a reflection cluster analysis module representing contradiction vectors; modeling, by the emotional operating system, a multi-agent relational simulation engine representing relational influence vectors and ecosystem predictions; modeling, by the emotional operating system, an emotional evolution tracking system representing growth trajectories and readiness score movement; modeling, by the emotional operating system, an emotional reinforcement learning system representing emotional state trajectories and reward signals; modeling, by the emotional operating system, an emotional behavior prediction engine representing emotional behavior predictions; and generating, by the emotional operating system, unified emotional scoring, labeling, and categorization outputs based on the structured models, training pipelines, and simulation engines.

2. The method of claim 1, further comprising executing a data capture pipeline including: presenting, to a user, scenario-based prompts, contradiction-mapped inputs, polarity-testing constructs, archetype triggers, shadow detection questions, and emotional-growth indicators; receiving, from the user, emotional data responsive to the scenario-based prompts, contradiction-mapped inputs, polarity-testing constructs, archetype triggers, shadow detection questions, and emotional-growth indicators; and labeling the emotional data using plant-state variables, pet-state markers, relational ecosystem markers, polarity metrics, archetype probabilities, shadow flags, contradiction vectors, and energy-state signatures.
3. The method of claim 2, further comprising generating and maintaining a machine-readable emotional labeling taxonomy defining emotional states, micro-behaviors, archetypes, shadows, polarity states, contradiction signals, growth trajectories, and ecosystem variables, and using the taxonomy to normalize the labeling of the emotional data across the growth layer, attachment layer, relational ecosystem layer, archetype classification layer, shadow pattern detection layer, and polarity state engine.
4. The method of claim 1, further comprising organizing training data for one or more artificial intelligence models according to multi-layer emotional states, polarity balance, attachment fragmentation, relational influence vectors, archetype and shadow interactions, contradiction clusters, and growth-cycle predictions, and supplying the organized training data to the training pipelines of the emotional operating system.
5. The method of claim 4, wherein organizing the training data comprises assigning, to individual training samples, labels indicating at least one of: an archetype identifier, a shadow identifier, a polarity state, a contradiction signal, a growth-stage indicator, and a relational ecosystem context, and grouping the training samples into batches based on at least one of the labels.

6. The method of claim 1, further comprising executing, by the multi-agent relational simulation engine, a multi-agent emotional simulation loop in which artificial intelligence agents simulate predicted emotional outcomes between archetypes, shadow patterns, polarity states, relational feedback loops, planetary overlays, numerology pair-keys, emotional readiness scores, and energetic signatures.
7. The method of claim 6, wherein executing the multi-agent emotional simulation loop comprises: initializing a plurality of artificial intelligence agents with respective archetype profiles, shadow patterns, and polarity states; propagating relational feedback loops between the artificial intelligence agents over a plurality of simulated time steps; and updating emotional readiness scores and energetic signatures of the artificial intelligence agents based on the relational feedback loops.
8. The method of claim 1, further comprising, by the polarity state engine, inferring, tracking, and predicting masculine, feminine, and blended polarity states in human or artificial agents based on one or more of nervous system cues, approach or retreat behavior, connection or withdrawal patterns, directive or reactive posture, relational initiation metrics, and energetic consistency patterns.
9. The method of claim 8, wherein predicting polarity states comprises generating a polarity stability metric over time for a given agent and associating the polarity stability metric with the readiness score movement tracked by the emotional evolution tracking system.
10. The method of claim 1, further comprising, by the reflection cluster analysis module, detecting emotional contradictions using paired or multi-point scenario tests revealing at least one of avoidance loops, vulnerability fragmentation, cognitive dissonance, emotional regression, polarity misalignment, and shadow activation.
11.

12. The method of claim 10, wherein detecting emotional contradictions comprises computing contradiction vectors from responses to the paired or multi-point scenario tests and generating contradiction alerts whenever a contradiction vector exceeds a threshold magnitude or matches a predefined contradiction cluster pattern.
13. The method of claim 1, further comprising, by the emotional reinforcement learning system, assigning reward signals to boundary-respecting actions, supportive communication, conflict repair behaviors, regulation prompts, clarity behaviors, and secure relational patterns exhibited by a human or artificial agent in response to relational scenarios.
14. The method of claim 12, wherein assigning reward signals comprises training a reinforcement-learning policy that selects subsequent relational interventions or prompts to increase a likelihood of the boundary-respecting actions, supportive communication, conflict repair behaviors, regulation prompts, clarity behaviors, and secure relational patterns.
15. The method of claim 1, further comprising, by the emotional evolution tracking system, tracking longitudinal changes in at least regulation, attachment patterns, shadow behaviors, polarity stability, archetype shifts, readiness score movement, and relational ecosystem adaptation for a given human or artificial agent.
16. The method of claim 14, wherein tracking longitudinal changes comprises storing time-stamped records of the regulation, attachment patterns, shadow behaviors, polarity stability, archetype shifts, readiness score movement, and relational ecosystem adaptation, and generating visual or numerical trajectories representing emotional evolution over time.
17. The method of claim 1, further comprising implementing the emotional operating system as a universal emotional cognition layer for applications including at least one of dating platforms, therapy platforms, coaching platforms, conversational artificial intelligence systems,

companionship artificial intelligence systems, personal assistants, interpersonal simulation environments, and multi-agent environments.

18. The method of claim 16, further comprising exposing application programming interfaces that enable external applications to submit user interaction data to the emotional operating system and to receive emotional metrics and predictions generated by the emotional operating system.
19. The method of claim 1, further comprising generating, by the emotional operating system, emotional metrics for humans or artificial agents including at least one of readiness scores, compatibility scores, archetype identifiers, shadow identifiers, polarity states, contradiction alerts, ecosystem predictions, and emotional state trajectories.
20. The method of claim 18, wherein generating the emotional metrics comprises combining outputs of at least the archetype classification layer, the shadow pattern detection layer, the polarity state engine, the reflection cluster analysis module, the multi-agent relational simulation engine, and the emotional evolution tracking system to form unified emotional scoring, labeling, and categorization outputs.
21. The method of claim 1, further comprising storing, in a non-transitory computer-readable medium, instructions that, when executed by one or more processors, cause performance of the method of claim 1 or any one of claims 2-19.

Abstract

A computer-implemented method for multi-layer emotional cognition modeling and training of an artificial intelligence agent using human relational frameworks, the method comprising: implementing, by one or more processors, an emotional operating system including structured models, training pipelines, and simulation engines configured to interpret, classify, predict, and simulate human emotional behavior across time; modeling, by the emotional operating system, a growth layer representing plant-state variables; modeling, by the emotional operating system, an attachment layer representing pet-state markers; modeling, by the emotional operating system, a relational ecosystem layer representing relationship-level ecosystem markers; modeling, by the emotional operating system, an archetype classification layer representing archetype probabilities; modeling, by the emotional operating system, a shadow pattern detection layer representing shadow flags; modeling, by the emotional operating system, a polarity state engine representing polarity metrics; modeling, by the emotional operating system, a reflection cluster analysis module representing contradiction vectors; modeling, by the emotional operating system, a multi-agent relational simulation engine representing relational influence vectors and ecosystem predictions; modeling, by the emotional operating system, an emotional evolution tracking system representing growth trajectories and readiness score movement; modeling, by the emotional operating system, an emotional reinforcement learning system representing emotional state trajectories and reward signals; modeling, by the emotional operating system, an emotional behavior prediction engine representing emotional behavior predictions; and generating, by the emotional operating system, unified emotional scoring, labeling, and categorization outputs based on the structured models, training pipelines, and simulation engines.

Drawings

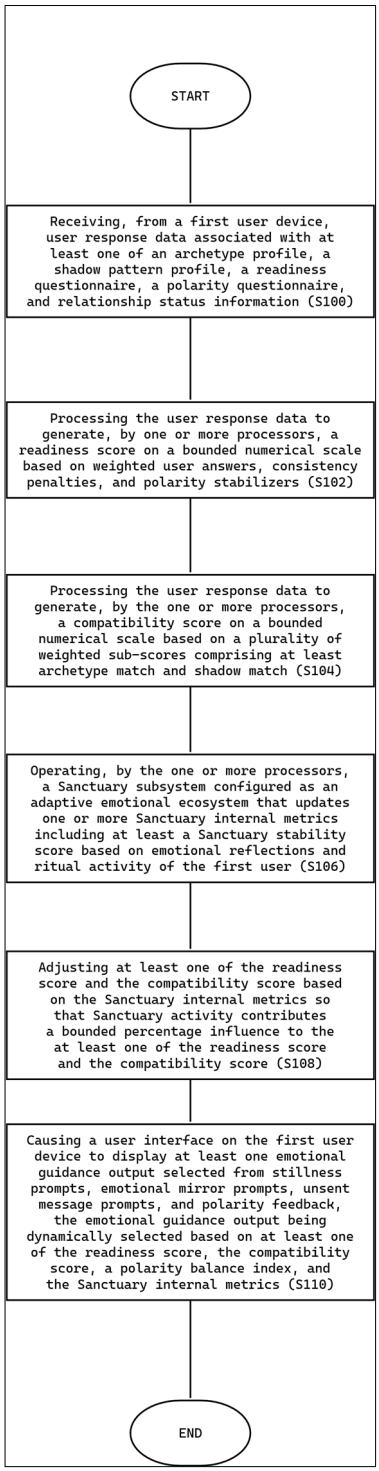

FIGURE 1

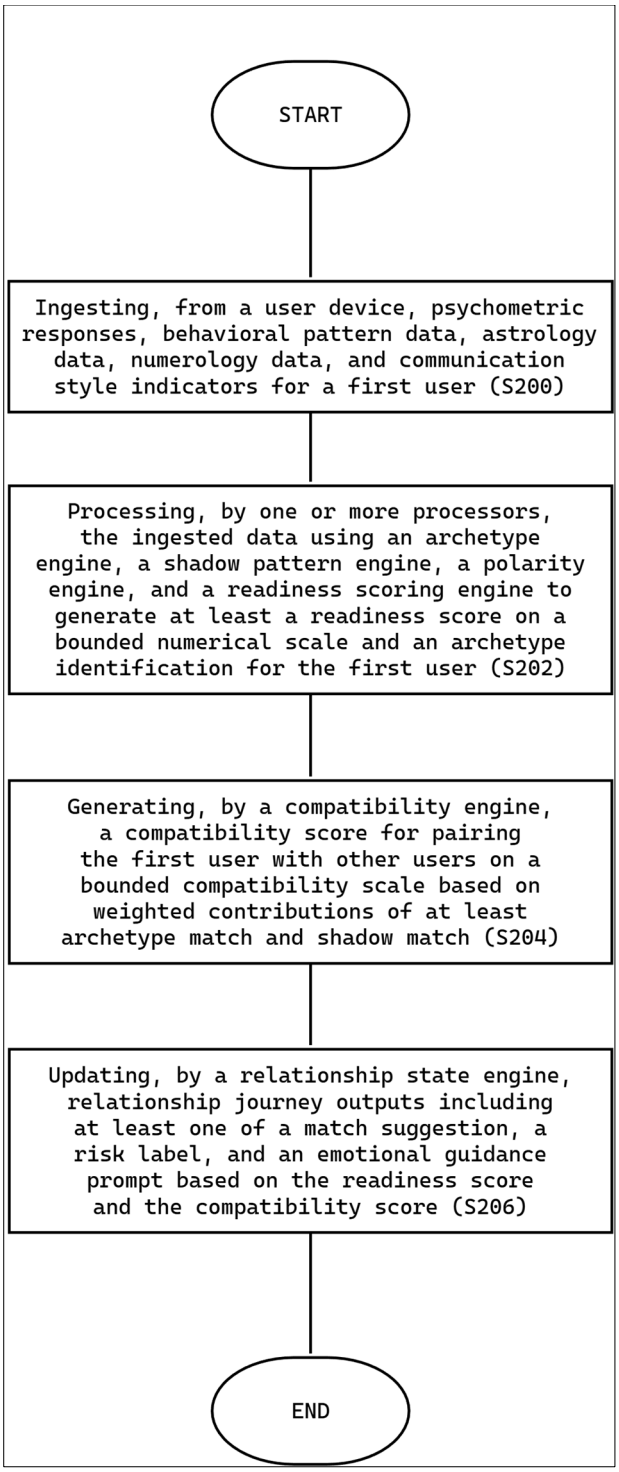
START
Ingesting, from a user device, psychometric responses, behavioral pattern data, astrology data, numerology data, and communication style indicators for a first user (S200)
Processing, by one or more processors, the ingested data using an archetype engine, a shadow pattern engine, a polarity engine, and a readiness scoring engine to generate at least a readiness score on a bounded numerical scale and an archetype identification for the first user (S202)
Generating, by a compatibility engine, a compatibility score for pairing the first user with other users on a bounded compatibility scale based on weighted contributions of at least archetype match and shadow match (S204)
Updating, by a relationship state engine, relationship journey outputs including at least one of a match suggestion, a risk label, and an emotional guidance prompt based on the readiness score and the compatibility score (S206)
END

FIGURE 2

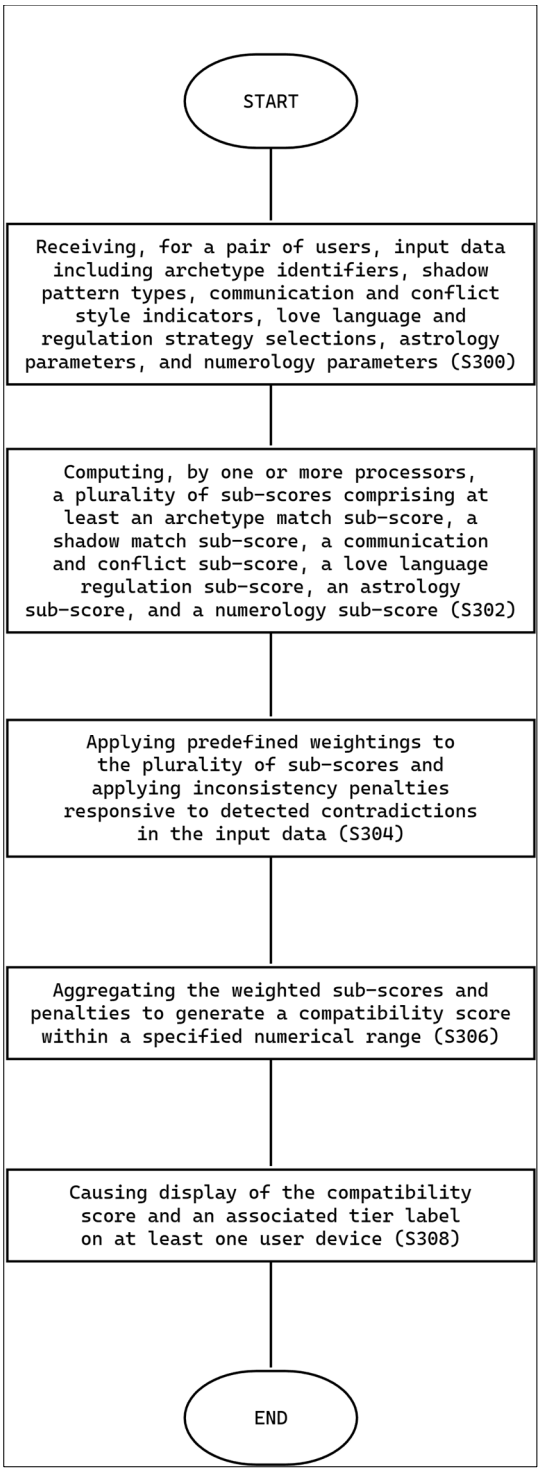
START
Receiving, for a pair of users, input data including archetype identifiers, shadow pattern types, communication and conflict style indicators, love language and regulation strategy selections, astrology parameters, and numerology parameters (S300)
Computing, by one or more processors, a plurality of sub-scores comprising at least an archetype match sub-score, a shadow match sub-score, a communication and conflict sub-score, a love language regulation sub-score, an astrology sub-score, and a numerology sub-score (S302)
Applying predefined weightings to the plurality of sub-scores and applying inconsistency penalties responsive to detected contradictions in the input data (S304)
Aggregating the weighted sub-scores and penalties to generate a compatibility score within a specified numerical range (S306)
Causing display of the compatibility score and an associated tier label on at least one user device (S308)
END

FIGURE 3

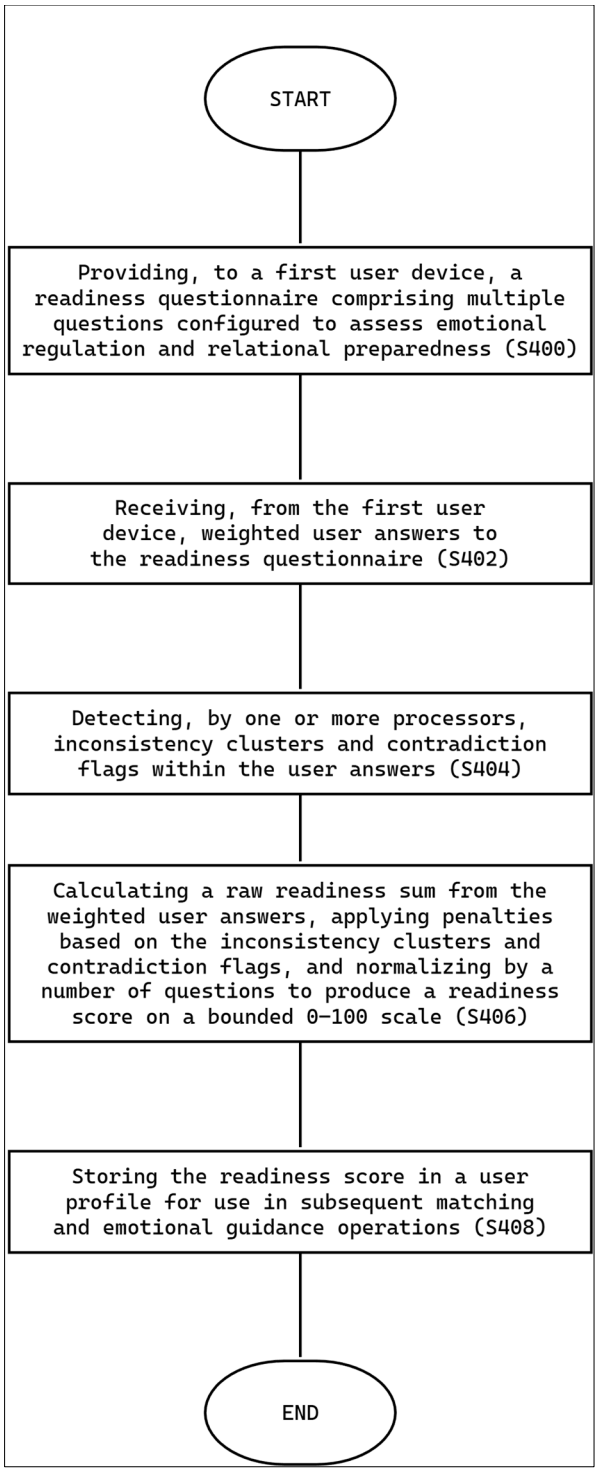
START
Providing, to a first user device, a readiness questionnaire comprising multiple questions configured to assess emotional regulation and relational preparedness (S400)
Receiving, from the first user device, weighted user answers to the readiness questionnaire (S402)
Detecting, by one or more processors, inconsistency clusters and contradiction flags within the user answers (S404)
Calculating a raw readiness sum from the weighted user answers, applying penalties based on the inconsistency clusters and contradiction flags, and normalizing by a number of questions to produce a readiness score on a bounded 0–100 scale (S406)
Storing the readiness score in a user profile for use in subsequent matching and emotional guidance operations (S408)
END

FIGURE 4

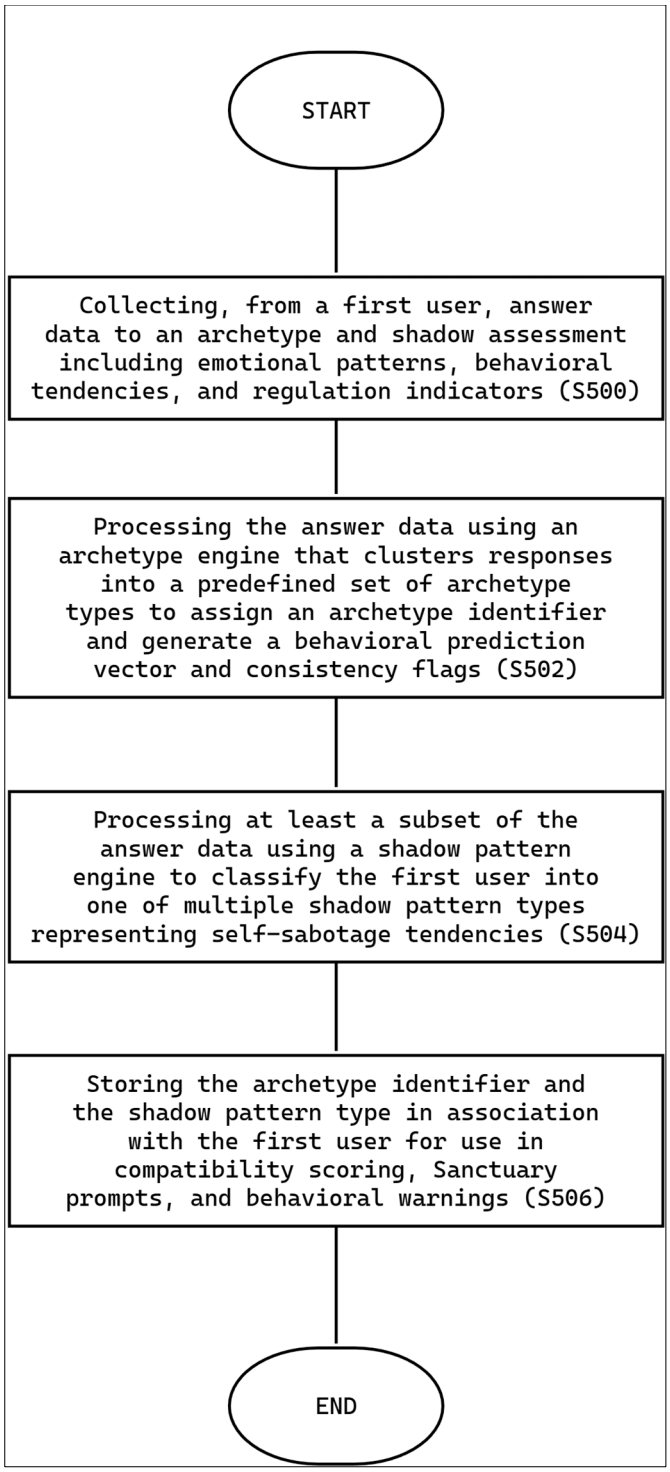
START
Collecting, from a first user, answer data to an archetype and shadow assessment including emotional patterns, behavioral tendencies, and regulation indicators (S500)
Processing the answer data using an archetype engine that clusters responses into a predefined set of archetype types to assign an archetype identifier and generate a behavioral prediction vector and consistency flags (S502)
Processing at least a subset of the answer data using a shadow pattern engine to classify the first user into one of multiple shadow pattern types representing self-sabotage tendencies (S504)
Storing the archetype identifier and the shadow pattern type in association with the first user for use in compatibility scoring, Sanctuary prompts, and behavioral warnings (S506)
END

FIGURE 5

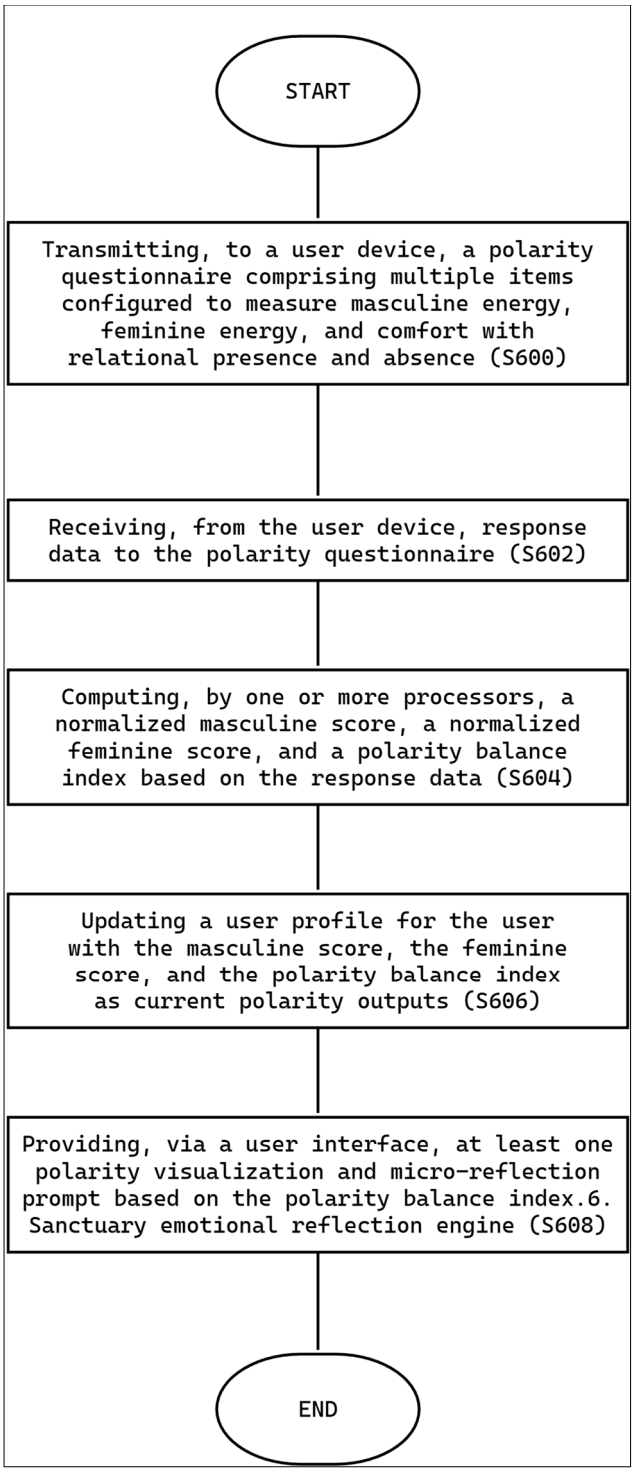
START
Transmitting, to a user device, a polarity questionnaire comprising multiple items configured to measure masculine energy, feminine energy, and comfort with relational presence and absence (S600)
Receiving, from the user device, response data to the polarity questionnaire (S602)
Computing, by one or more processors, a normalized masculine score, a normalized feminine score, and a polarity balance index based on the response data (S604)
Updating a user profile for the user with the masculine score, the feminine score, and the polarity balance index as current polarity outputs (S606)
Providing, via a user interface, at least one polarity visualization and micro-reflection prompt based on the polarity balance index.6. Sanctuary emotional reflection engine (S608)
END

FIGURE 6

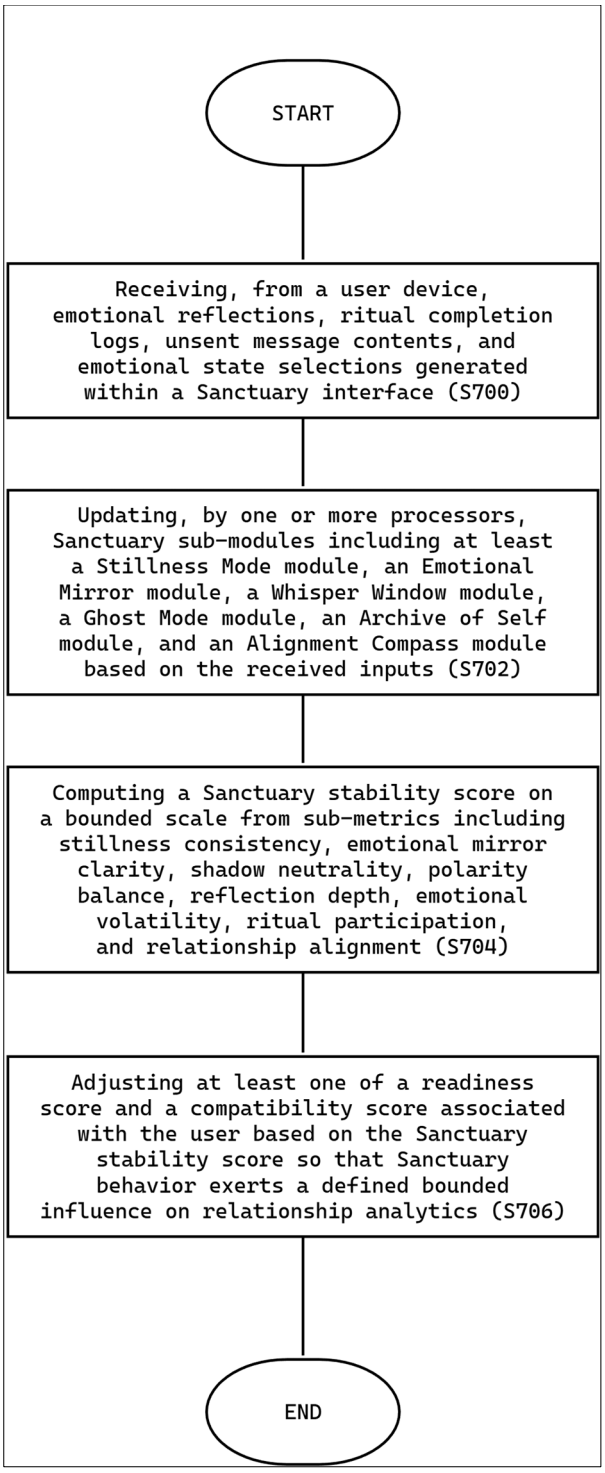
START
Receiving, from a user device, emotional reflections, ritual completion logs, unsent message contents, and emotional state selections generated within a Sanctuary interface (S700)
Updating, by one or more processors, Sanctuary sub-modules including at least a Stillness Mode module, an Emotional Mirror module, a Whisper Window module, a Ghost Mode module, an Archive of Self module, and an Alignment Compass module based on the received inputs (S702)
Computing a Sanctuary stability score on a bounded scale from sub-metrics including stillness consistency, emotional mirror clarity, shadow neutrality, polarity balance, reflection depth, emotional volatility, ritual participation, and relationship alignment (S704)
Adjusting at least one of a readiness score and a compatibility score associated with the user based on the Sanctuary stability score so that Sanctuary behavior exerts a defined bounded influence on relationship analytics (S706)
END

FIGURE 7

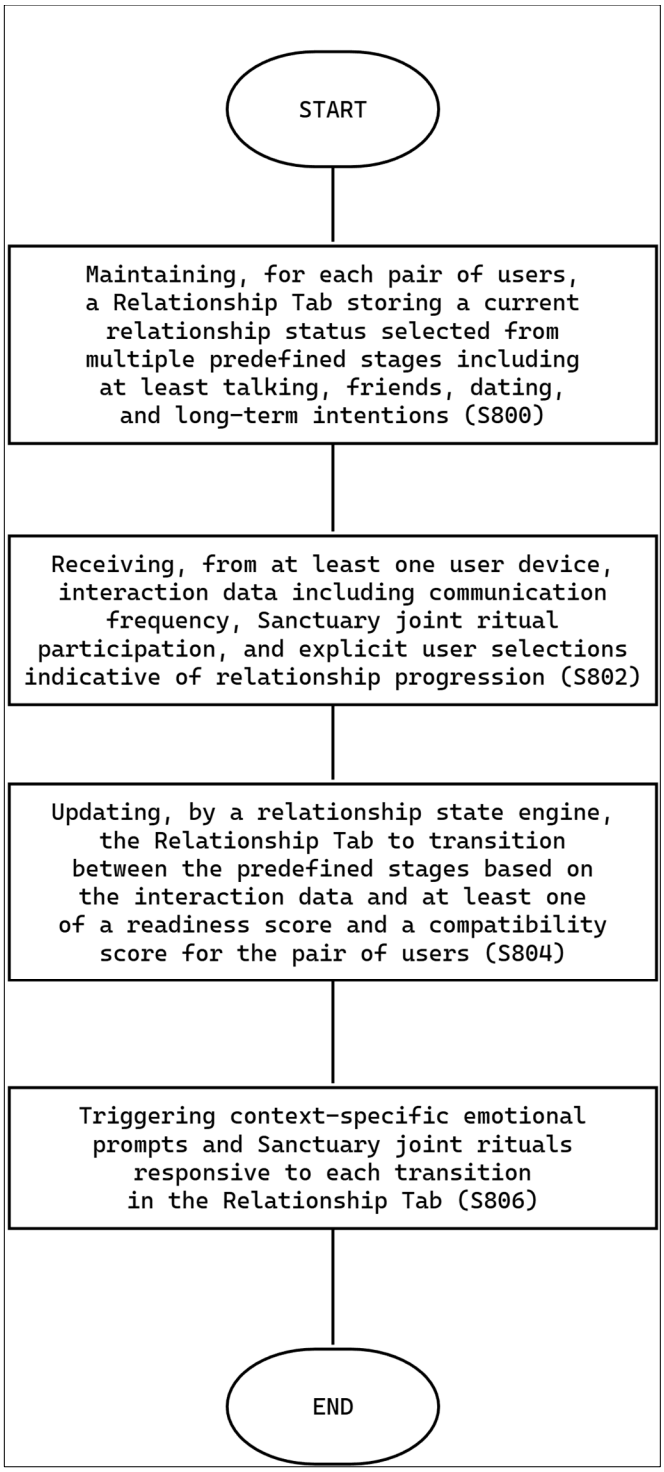
START
Maintaining, for each pair of users, a Relationship Tab storing a current relationship status selected from multiple predefined stages including at least talking, friends, dating, and long-term intentions (S800)
Receiving, from at least one user device, interaction data including communication frequency, Sanctuary joint ritual participation, and explicit user selections indicative of relationship progression (S802)
Updating, by a relationship state engine, the Relationship Tab to transition between the predefined stages based on the interaction data and at least one of a readiness score and a compatibility score for the pair of users (S804)
Triggering context-specific emotional prompts and Sanctuary joint rituals responsive to each transition in the Relationship Tab (S806)
END

FIGURE 8

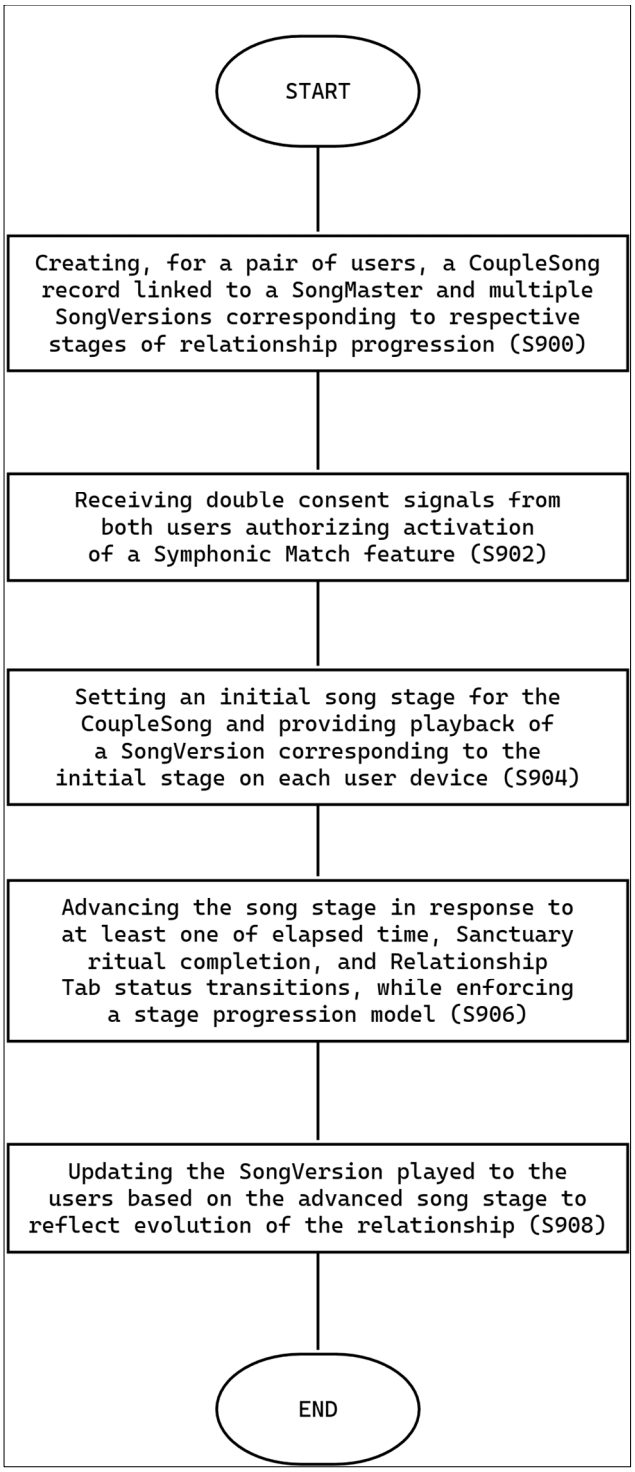
START
Creating, for a pair of users, a CoupleSong record linked to a SongMaster and multiple SongVersions corresponding to respective stages of relationship progression (S900)
Receiving double consent signals from both users authorizing activation of a Symphonic Match feature (S902)
Setting an initial song stage for the CoupleSong and providing playback of a SongVersion corresponding to the initial stage on each user device (S904)
Advancing the song stage in response to at least one of elapsed time, Sanctuary ritual completion, and Relationship Tab status transitions, while enforcing a stage progression model (S906)
Updating the SongVersion played to the users based on the advanced song stage to reflect evolution of the relationship (S908)
END

FIGURE 9

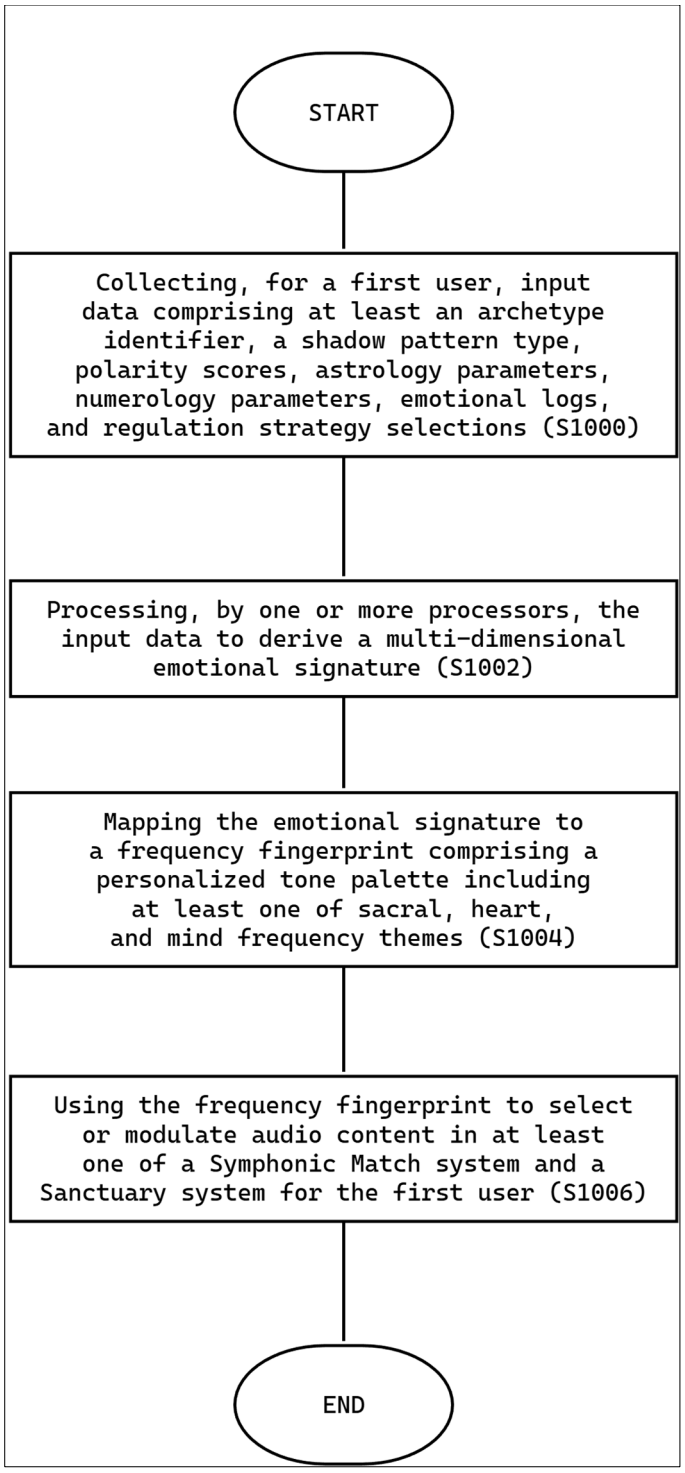
START
Collecting, for a first user, input data comprising at least an archetype identifier, a shadow pattern type, polarity scores, astrology parameters, numerology parameters, emotional logs, and regulation strategy selections (S1000)
Processing, by one or more processors, the input data to derive a multi-dimensional emotional signature (S1002)
Mapping the emotional signature to a frequency fingerprint comprising a personalized tone palette including at least one of sacral, heart, and mind frequency themes (S1004)
Using the frequency fingerprint to select or modulate audio content in at least one of a Symphonic Match system and a Sanctuary system for the first user (S1006)
END

FIGURE 10

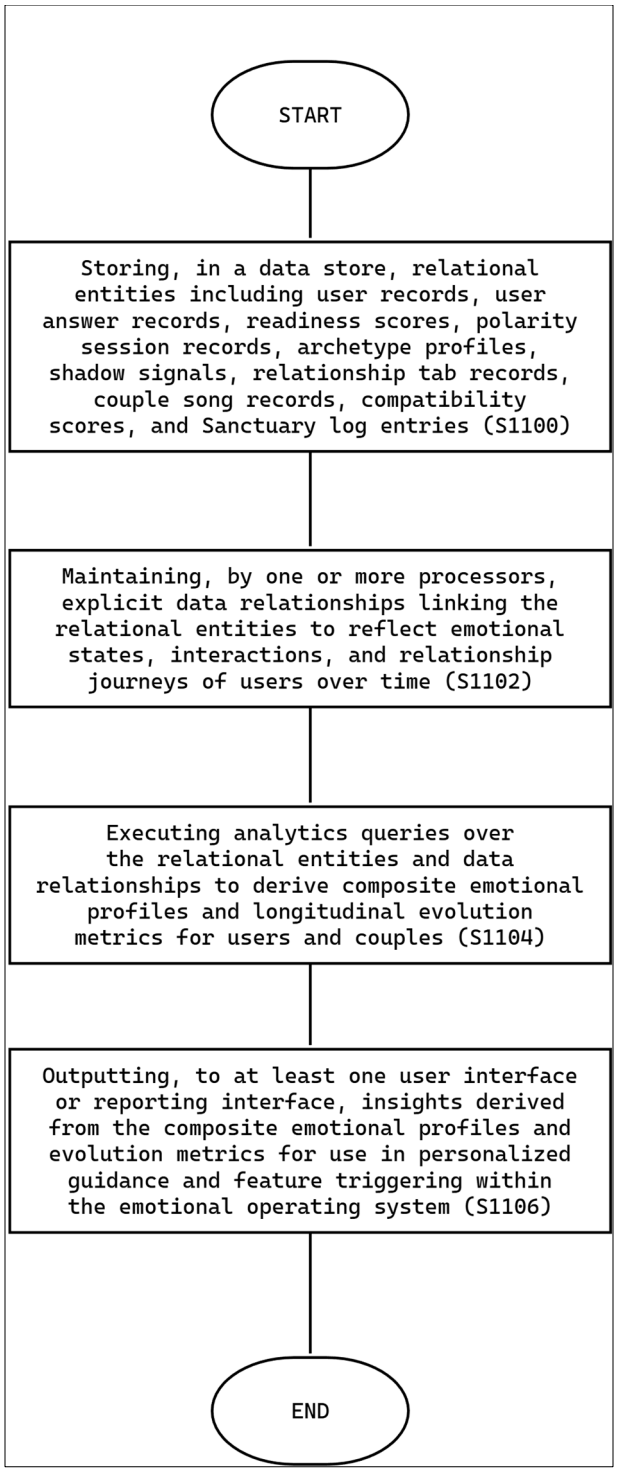
START
Storing, in a data store, relational entities including user records, user answer records, readiness scores, polarity session records, archetype profiles, shadow signals, relationship tab records, couple song records, compatibility scores, and Sanctuary log entries (S1100)
Maintaining, by one or more processors, explicit data relationships linking the relational entities to reflect emotional states, interactions, and relationship journeys of users over time (S1102)
Executing analytics queries over the relational entities and data relationships to derive composite emotional profiles and longitudinal evolution metrics for users and couples (S1104)
Outputting, to at least one user interface or reporting interface, insights derived from the composite emotional profiles and evolution metrics for use in personalized guidance and feature triggering within the emotional operating system (S1106)
END

FIGURE 11