

Module Title



Topic 5:

Design and Build a Database (2)

Scope and Coverage

This topic will cover:



- An introduction to GET and POST
- An introduction to MySQL
 - Database queries
 - Data types and ranges
 - SQL statements



Learning Outcomes



By the end of this topic students will be able to:

- Design and build a database which interacts with web page.

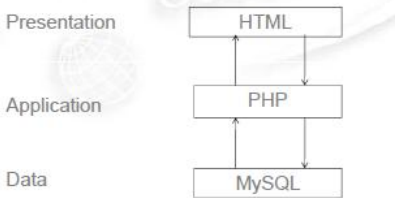


Introduction



- This lecture will introduce you to understanding how HTTP permits the sending of data to web pages and how to use MySQL into our dynamic websites architecture.
 - MySQL fits into the data layer of our N-Tier architecture.
- PHP acts as the mediator between the client and the database management system.
 - The presentation layer never communicates directly with the data layer.
 - The data layer never communicates directly with the client layer.

Northumbria Community College

Our Architecture So Far





```
graph TD; HTML[HTML] <--> PHP[PHP]; PHP <--> MySQL[MySQL];
```

Northumbria Community College



Databases and PHP

- In order to make use of a data layer, you must have access to a **database**.
 - You will need one for the activities throughout this course.
 - You will need a username and password.
 - You will be provided with these as part of your course.
 - For the purpose of this course, we assume that your database is stored on a **localhost**.
 - It doesn't have to be, but this would be the usual arrangement.

Northumbria Community College

Connecting to the Database - 1

- For this module, we have created a user with login and password:
 - **monke13nccuser** with password **ncc1**
- When creating your own code you will use your **OWN** username and password.
- We will use a database called **monke13ncc**.
- This database is currently empty.
 - It has no tables.
 - It has no data.

North Carolina Central University



Connecting to the Database - 2

- To make the connection to our MYSQL data, use the following code:

```
<?php
$host = "localhost";
$user = "monke13_nccuser";
$pass = "ncc1";
$dbname = "monkey13_ncc";



$connection = mysql_connect($host, $user, $pass)
or die ("Couldn't connect to database");

?>
```

North Carolina Central University

Errors

- Depending on the level of reporting in your browser, you may or may not get meaningful error messages if this goes wrong.
- However, if you have a problem, then check the following:
 - The host is not correct
 - The username does not exist
 - The password does not match the user

North Carolina Central University



A Database Connection

- Having made the connection to the server, you must select the database with which you were going to work.

```
<?php
    $host = "localhost";
    $user = "monkey13_nccuser";
    $pass = "ncc1";
    $database = "monkey13_ncc";



    $connection = mysql_connect($host, $user, $pass)
    or die ("Couldn't connect to database");
    mysql_select_db ($database);

?>
```

North Carolina Central University



Connection Made

- Once the connection is made, we can start manipulating our underlying database.
 - We do this using standard SQL queries, with which you should already be familiar.
- First we build a query in a variable, and then we pass the query and the database connection to a function called mysql_query.

North Carolina Central University



GET

- Using the GET method, the information that is encoded gets sent as an extension to the URL.
- It will appear as something like:
`http://<url>/dice_roll_get.php?num=6&faces=7`
- This information is available to PHP via the `$_GET` variable.
- This action used to provided data to a PHP form influences the code that we use to access it.
- We can make use of the GET protocol by changing the action in our form to GET.

North Carolina Central University



POST

- The POST protocol is most useful on a day-to-day basis.
- POST has no limitations on size of data.
- It has no limitations on data types.
- It works by placing the encoded data in a standard HTTP header.

Joining Great Britain's 20+ Regions

Limitations of POST and GET

- Both protocols permit you to send data to a PHP script
- That data persists as long as the script is running (if the page is reloaded it will usually ask to resend the data).
- If we move outside of the confines of a single PHP script, we will lose the data.
- Now lets create the database table



Joining Great Britain's 20+ Regions

Creating a Table 1

```
$query = "CREATE TABLE test-table (
    FirstName varchar (15), SurName varchar (15)
)";



$ret = mysql_query ($query, $connection);

if ($ret) {
    Echo "<p>Table created!</p>";
}
else {
    Echo "<p>Something went wrong: " . Mysql_error ();
    + "</p>";
}
```

Joining Great Britain's 20+ Regions

Creating a Table 2



- This is a process that can be done only once.
 - After that, it will fail saying that the table already exists.
- Mysql_error is a useful function that returns the next of the last MySQL error that was encountered.
 - Databases can be frustrating, so get into the habit of using this for diagnostic purposes
- Once we have browsed to this PHP page we will have a table in our database.
 - Often this is done as a separate **setup.php** process

Northumbria Community College

Putting Data in a Table



- Almost all MySQL manipulation is done through the mysql_query function.
 - It will be the primary mechanisms by which you achieve your objective.
- We can use it to execute any valid SQL:

```
$query = "INSERT INTO test_table (FirstName, SurName ) values ('Michael', 'Heron')";  
$ret = mysql_query ($query, $connection);  
  
if ($ret) {  
    echo "<p>Data Inserted!</p>";  
}  
else {  
    echo "<p>Something went wrong: " . mysql_error(); + "</p>";  
}
```

Northumbria Community College



Getting Data out of a Database

- Getting data out of a database too is done through queries.
- However, manipulating that data requires us to do some further process.
- The results come out in the form of an **associative array**.
- Data can be retrieved using GET or POST as seen above.

Northumbria Community College



Sending of Data to Web Pages

- HTTP permits the sending of data to web pages.
- Two methods for this are:
 - GET
 - POST
- When it is time to send information, it is encoded by the client and then sent in one of two ways.

North Central College



The Associative Array

- Most arrays are indexed with a number.
- Associative arrays are indexed with other kinds of data, such as descriptive strings.
- They work the same way – the index provides the corresponding element.
 - The index in an associative array is often called a **key**.
 - The element is often called the **value**.

North Central College



Manipulating the Results

- The results come out as an **array of associative arrays**.
 - The keys of each associative array are the fields in the database.
 - The values are the contents of the database corresponding to those fields for a record.
- Thus, making use of the data we have queried for the database requires us to provide handling code in PHP.

North Central College

Extracting the Data - 1

- PHP gives us a number of helper functions.
 - If we want how many records that were returned, we use the `mysql_num_rows` function.
- This is valuable information we will need if we are to perform operators on each of the records that were returned.
- The function takes the results of a query as a parameter, and gives an integer in return.

North Carolina Central University

Extracting the Data - 2

```
<?php
    $host = "localhost";
    $user = "monkey13_ncuser";
    $pass = "ncc1";
    $database = "monkey13_ncdb";



    $connection = mysql_connect($host, $user, $pass)
        or die ("Couldn't connect to database");
    mysql_select_db ($database);

    $query = "SELECT * FROM test_table";

    $ret = mysql_query ($query, $connection);



    $num_results = mysql_num_rows ($ret);

    echo "<p>There were $num_results results returned from the query.</p>";
?>
```

North Carolina Central University



Extracting the Data - 3

- We have two main ways of getting to the actual data.
 - Through the `mysql_result` function
 - Through the `mysql_fetch_array` function.
- With the former, we provide the results, the index of the specific row we wish to query and the field we wish to query:
`$num_results = mysql_num_rows ($ret);`
`$name = mysql_result ($ret, 0 "FirstName");`
Echo "`<p>There were $num_results results returned from the query.`
", and the first FirstName was `$name</p>`;"

North Carolina Central University

Fetching a Row - 1

- The results set we get from the query contains each of the rows, but it also contains an internal counter of the last row for which we asked.
 - We can use `mysql_fetch_array` to fetch each row in order.
 - Each call to the function increments the counter by one.
- We can use this to perform manipulation or output on each row of the results one by one.



Northumbria Community College

Fetching a Row - 2

```
Echo "<table width = '100%'>";
Echo "<tr>";
Echo "<th align = 'left'>Record</th>";
Echo "<th align = 'left'>First Name</th>";
Echo "<th align = 'left'>Surname</th>";
Echo "</tr>";

For ($i = 0; $i < $num_results; $i++) {
    $row = mysql_fetch_array ($ret);
    Echo "<tr>";
    Echo "<td>$i</td>";
    Echo "<td>," . $row["FirstName"] . "</td>";
    Echo "<td>," . $row["Surname"] . "</td>";
    Echo "</tr>";
}



Echo "</table>";
```

Northumbria Community College

User Input - 1

- We can incorporate user input using the techniques we have learned so far.

```
<html>
<head>
<title>Database Form</title>
</head>
<body>
<form action = "database_search.php" method = "POST">
<p>First Name</p>
<input type = "text" name = "firstname">
<p>Surname</p>
<input type = "text" name = "surname">
<input type = "submit" value = "Search that Data">
<input type = "reset" value = "Clear values">
</body>
</html>
```

Northumbria Community College

User Input - 2



- We can incorporate user input into queries into the same way we can into regular output:

```
$firstname = $_POST["firstname"];
$surname = $_POST["surname"];

$query = "SELECT * from test_table WHERE FirstName = \"\$firstname\"
OR SurName = \"\$surname\"";



$ret = mysql_query ($query, $connection);

$num_results = mysql_num_rows ($ret);
```

Nottingham City Council



SQL Injection - 1

- Whenever we insert text from a user into a query, we run the risk of an SQL injection attach.
 - When someone incorporates their own SQL into their form input.
- Many browsers help combat this now by automatically sanitizing some of the input.
 - However, not all do, and not all PHP access will come via a browser.
- You should **sanitise** all user data using the `mysql_real_escape_string()` function.

Nottingham City Council



Sanitised Input

- `$firstname = $_POST["firstname"];`
- `$surname = $_POST["surname"];`
- `$firstname = mysql_real_escape_string ($firstname);`
- `$surname = mysql_real_escape_string ($surname);`
- `$query = "SELECT * from test_table WHERE`
- `FirstName = \"\$firstname\" OR SurName = \"\$surname\"";`
- `$ret = mysql_query ($query, $connection);`

Nottingham City Council



MySQL and PHP - 1

- A proper treatment of how SQL can be used to query a MySQL database is outside the scope of this module.
 - However you will have encountered it in previous modules.
- There are often two ways to accomplish any given data retrieval task using these tools.
 - A broad query with heavy PHP processing
 - A specific query with little PHP process

North Carolina Central University



MySQL and PHP - 2

- With judicious use of joins, ordering and grouping by, you can create very sophisticated SQL queries.
 - These queries are often large and unwieldy.
 - However, MySQL is a platform designed for very efficient storage and retrieval of large amounts of data.
- PHP allows you to query a broad data set (such as select * from <table>) and then manually manipulate it for meaning.
 - This is inefficient, but can be useful for very fine detail work.

North Carolina Central University



MySQL and PHP - 3

- In all cases, you must be mindful of several things:
 - Efficiency of data access
 - Readability of your code
 - Maintainability of your code
 - Portability of your architecture
- You want to make MySQL do as much of the work as it can.
 - However if you have to contort your queries to accomplish a simple goal, PHP can be a more effective tool.

North Carolina Central University



Web Development Frameworks

- *Web development frameworks are software frameworks that are designed to support web applications development.*
- *Web development framework makes it easier to write, maintain and scale web applications.*
- *Web development framework provide tools and libraries that simplify common web development tasks e.g. interacting with databases, supporting sessions and user authorization, and etc.*
- 2 examples of web development frameworks:
 - ASP.NET
 - RubyonRails

Northumbria Community College

Ruby on Rails - 1

- Ruby on rails is a software programme that is designed as a framework for web development.
 - It is based on Ruby software
 - It is fun
 - It allows you to write less code
 - It is designed so that when you are writing code you don't have to repeat yourself
 - Convention over configuration is the preferred method of coding.

Northumbria Community College



Ruby on Rails - 2

```
# The Hello Class
class Hello

  def initialise( name )
    @name = name.capitalize
  end



  def salute
    puts "Hello #{@name}!"
  end

  # Create a new object
  h = Hello.new("Andy")
  # Output "Hello Andy!"
  h.salute
end
```

Northumbria Community College

Conclusion

- PHP offers integrated support for MySQL and other databases.
 - MySQL is the one we use throughout this module.
- PHP and MySQL integration is handled via the use of queries.
 - The data that comes back from a MySQL query can be further refined by PHP as needed.
- It is important to sanitise the input we receive from a user.
 - Or we risk SQL injection attacks.

Northumbria Community College



Terminology

Associative Array - An array which is indexed by data types (usually strings) other than just integers.

SQL Injection - A (often malicious) piece of SQL that is provided by the user to influence the result of a query.



Sanitization - The process of taking potentially suspect user input and converting into a form that will not be harmful for database queries.


Ruby on Rails – web framework that is built on Ruby programming language.

Northumbria Community College

References

- Rubyonrails, 201. [online] Available at:
http://guides.rubyonrails.org/getting_started.htm

Northumbria Community College



Awarding Great British Qualifications

Topic 5 – Design and Build a Database (2)

Any Questions?
