


• GLbTOKEN Architecture

How the pages on GitHub link to Railway → New API → AI models – end to end

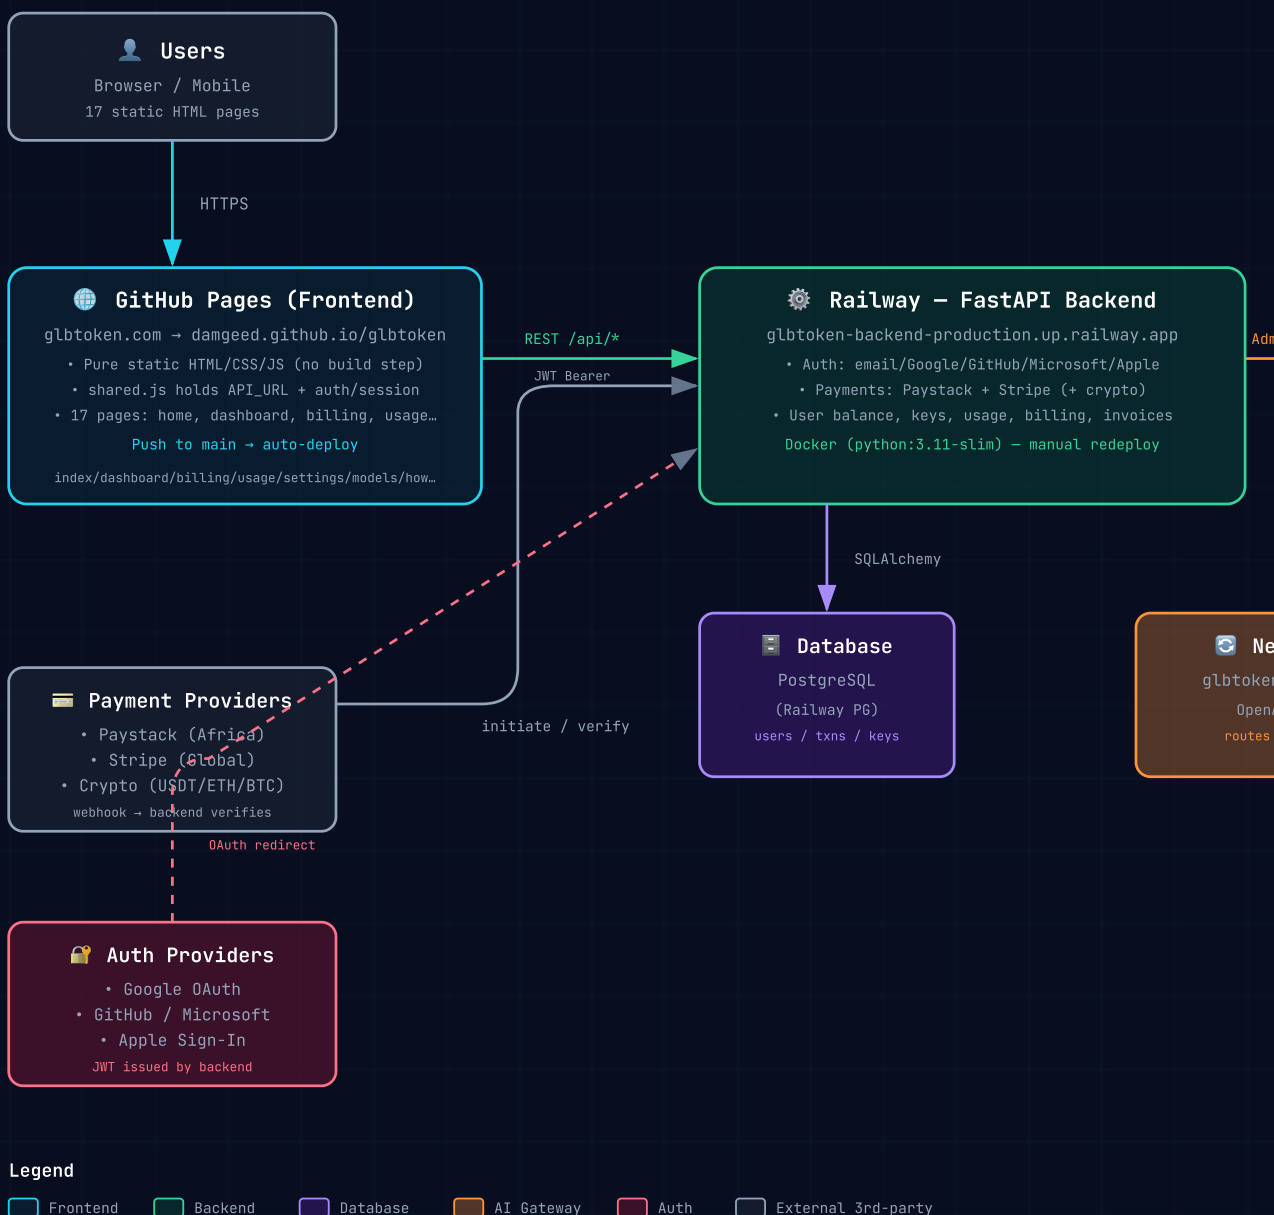

🔄 How a request moves through the system

1. User opens glbtoken.com → GitHub Pages serves the static HTML/CSS/JS (17 pages, no server).

2. **Login:** browser sends credentials → Railway FastAPI verifies (email/password or Google/GitHub/Microsoft/Apple OAuth) → issues **JWT** (access + refresh token) stored per-tab.
3. **Top up:** billing page calls `POST /api/payments/...` → backend creates a Paystack/Stripe/crypto payment → provider webhook calls back → backend verifies signature → credits user balance in PostgreSQL.
4. **Buy tokens / create key:** backend syncs the user + quota to **New API** via its admin API (1 GlbTOKEN = 1 quota unit).
5. **Chat / API call:** the app talks to `NEW_API_BASE_URL/v1/chat/completions` with an OpenAI-compatible payload → New API routes to the actual model provider (OpenAI / Anthropic / Google / DeepSeek...).
6. **Usage tracking:** backend records token consumption → dashboard/usage/billing pages read it via `GET /api/...`
7. **Deploy:** push to GitHub main → Pages redeploys frontend automatically; Railway backend redeploys **manually** from the dashboard.

● Frontend – GitHub Pages

- Static HTML/CSS/JS, no build step
- Domain: `glbtoken.com` → `damgeed.github.io/glbtoken`
- `shared.js`: API_URL + auth + session
- 17 pages incl. dashboard/billing/usage/settings
- Auto-deploy on push to `main`

● Backend – Railway (FastAPI)

- `glbtoken-backend-production.up.railway.app`
- Auth: email + Google/GitHub/MS/Apple OAuth
- Payments: Paystack / Stripe / crypto
- Business logic: balance, keys, usage, invoices
- Docker `python:3.11-slim` – manual redeploy

● AI Gateway – New API

- `glbtoken-new-api.up.railway.app`
- OpenAI-compatible `/v1/*` endpoints
- Backend syncs users + quota via admin API
- Routes to OpenAI / Anthropic / Google / more
- 1 GlbTOKEN = 1 quota unit

● Data & Storage

- PostgreSQL on Railway
- Tables: users, transactions, keys, settings
- Avatars stored as data-URL in user settings
- Login history with GeoIP location