

---

**Cheetah**

---

**Cheetah**  
**Use-Case Specification: Add University**

**Version 1.1**

Cheetah

Version 1.1

02/05/2017

## Revision History

Date	Version	Description	Author
28/10/2016	1.0	Initial Version	Damian Pistorius, Lior Olszewski, Sara Olszewski
02/05/2017	1.1	Function Points	Sara Olszewski

## Table of Contents

1.	Use-Case Name	4
1.1	Brief Description	4
2.	Flow of Events	4
2.1	Basic Flow	4
3.	Special Requirements	6
3.1	Functionality in the Browser	6
4.	Preconditions	6
4.1	Log-In	6
5.	Postconditions	6
5.1	Submit	6
6.	Extension Points	6

# Use-Case Specification: Add University

## 1. Use-Case Name


### 1.1 Brief Description

This use case allows the student to create and submit add his institution if it isn't existing yet.


## 2. Flow of Events

### 2.1 Basic Flow

ActivityDiagram:

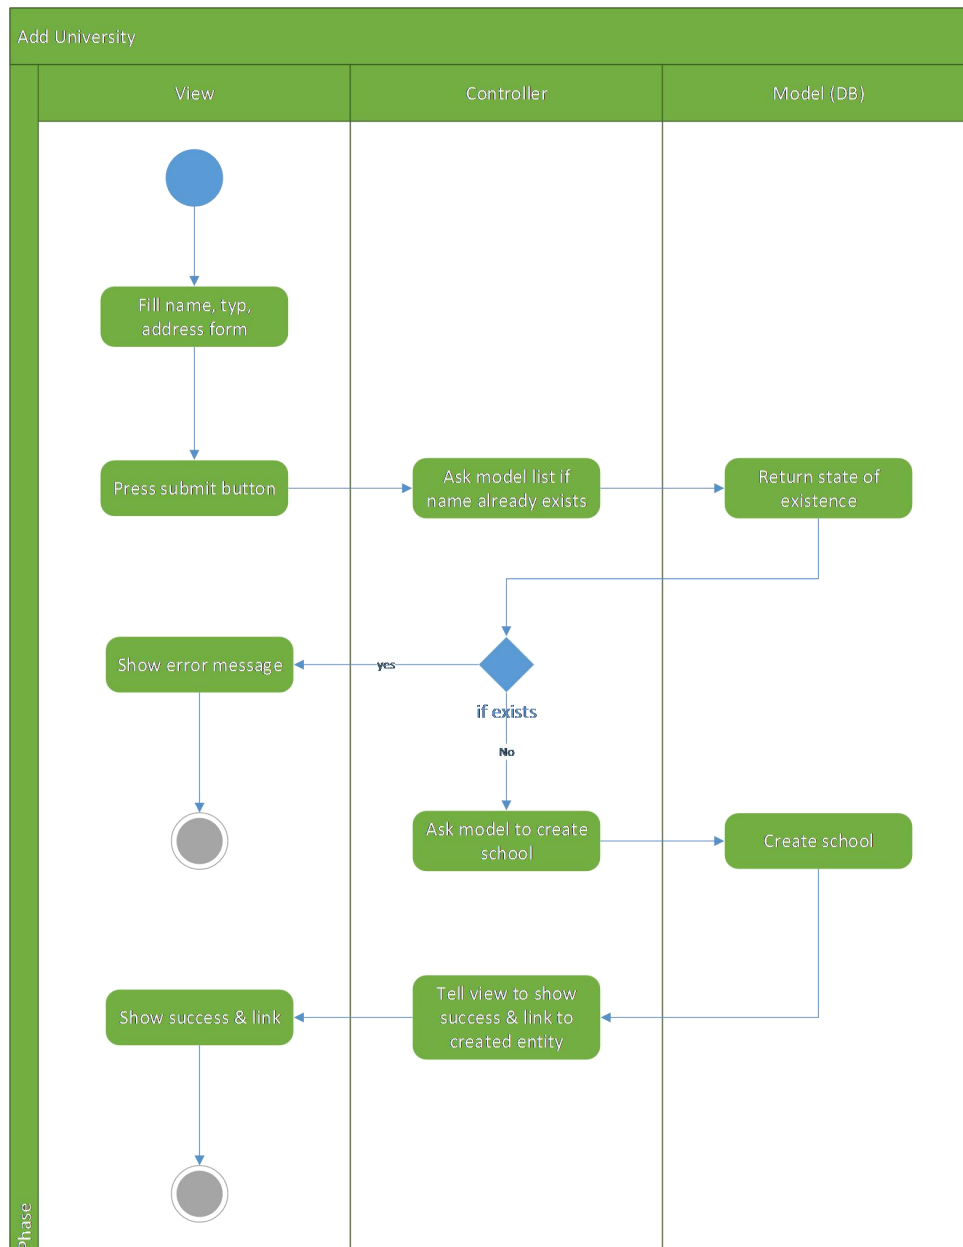

**Mock-Up:**

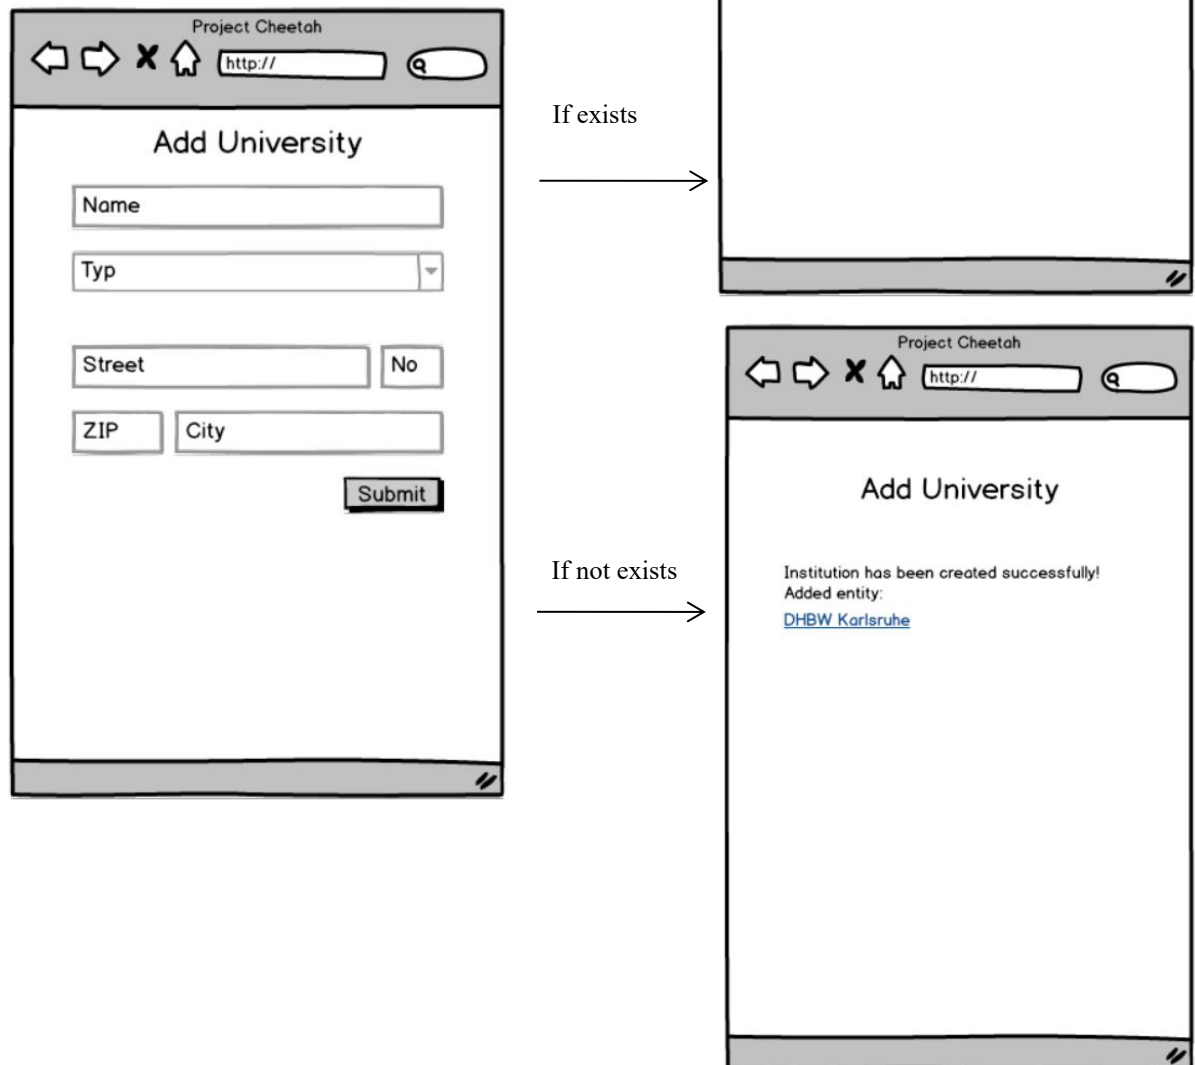

### **3. Special Requirements**

#### **3.1 Functionality in the Browser**

Since it will be a web application, it should fit every browser. It should have a responsive design.

### **4. Preconditions**

#### **4.1 Log-In**

The student has to be registered and logged in.

### **5. Postconditions**

#### **5.1 Submit**

The student has to press the submit button so the database can create and add the new school.

### **6. Extension Points**

Function Point Calculation:

[https://docs.google.com/spreadsheets/d/1GuAvXTwR3EBxf9bSZ5d9jDknXt4O-wumNrIfMivH\\_Uo/edit#gid=0](https://docs.google.com/spreadsheets/d/1GuAvXTwR3EBxf9bSZ5d9jDknXt4O-wumNrIfMivH_Uo/edit#gid=0)