

Linquiq Team Handover Report

Product: Linquiq (mobile + web)

Operator:

This report explains how to run the apps, how the system is built, what the API endpoints do, and what a new team needs to get Linquiq running.

1. What Linquiq is


Linquiq helps people capture and organize networking info from conferences and expos:

- Notes, photos, voice recordings, and files
- "Linqs"

Repo layout

Folder	What it is
MobileApp	

2. Architecture (simple)

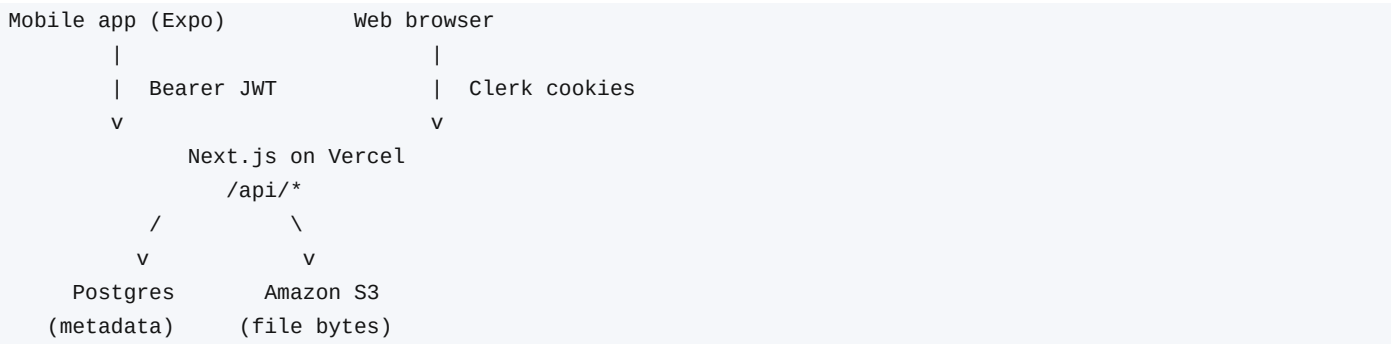

Pieces

- Clerk - sign-in, waitlist/invites, user identity
- Next.js

Auth rule

- Web uses Clerk session cookies
- Mobile

3. What to hand the new team (access)

Give them ownership or admin on:

- GitHub repo (`DanDan1134/Linquinq`)

- Vercel

Also share:

- Current Production env var values (via a secure vault, not chat/email)

- How to

4. Environment variables (Web)

Create `Web/.env` (never commit secrets):

```
DATABASE_URL=postgresql://...
NEXT_PUBLIC_CLERK_PUBLISHABLE_KEY=pk...
CLERK_SECRET_KEY=sk...
AWS_ACCESS_KEY_ID=...
AWS_SECRET_ACCESS_KEY=...
AWS_REGION=...
AWS_BUCKET_NAME=...
```

Same values must exist on Vercel Production.

Mobile: Clerk publishable key in `MobileApp/App.tsx` (`ClerkProvider`) must match that same Clerk app.

5. How to run the Web app

```
cd Web
npm install
# create Web/.env with the vars above

# If schema changed:
npx drizzle-kit generate
npx drizzle-kit migrate

npm run dev
```

What | URL

Local UI

CI: ``.github/workflows/ci.yml`` runs on pushes/PRs to ``main`` that change ``Web/`` -> ``lint`` -> ``test`` -> ``build``.

6. How to run the Mobile app

```
cd MobileApp
npm install
npx expo start
```

Then:

- ``i`` - iOS simulator

- ``a`` - A

Critical mobile settings

1. ``API_BASE`` is in ``MobileApp/api/client.ts``
2. Product

EAS / TestFlight

Profiles in ``MobileApp/eas.json``: ``development``, ``preview``, ``production``

```
eas build --platform ios --profile production
eas submit --platform ios
```

Free Expo plan: 15 Android + 15 iOS builds per month. Deleting old builds does not restore quota. When out: wait for month reset, build locally (``eas build --local``), or upgrade.

7. Data model (short)

Table | Purpose

``entries``

Schema: ``Web/src/db/schema.ts``

Bytes live

8. API endpoints

Auth: Clerk cookie (web) or ``Authorization: Bearer <JWT>`` (mobile)

Bases

Environment | Base

Local |

All routes below are under `/api`.

Method	Path	Purpose
--------	------	---------

GET		
-----	--	--

Upload flow

1. POST /api/files/upload-helper with file metadata -> temporary PUT URLs + S3 keys

2. Client u

9. Web pages (non-API)

Path	Purpose
------	---------

/	L
---	---

10. First-week checklist

1. Get access to GitHub, Vercel, Clerk, AWS, Postgres, Expo, Apple

2. Store P

11. Common pitfalls

- Using `https://linquiq.com` as mobile `API\_BASE` -> redirect to www -> lost auth -> 401

- Differ

12. Where to look in the repo

Path | Why

README.m

13. Security note for handover

- Keep secrets out of git and out of this document's committed copies of real keys

- Prefer