Tên: Lê Đăng Khôi Lớp: CNTT2

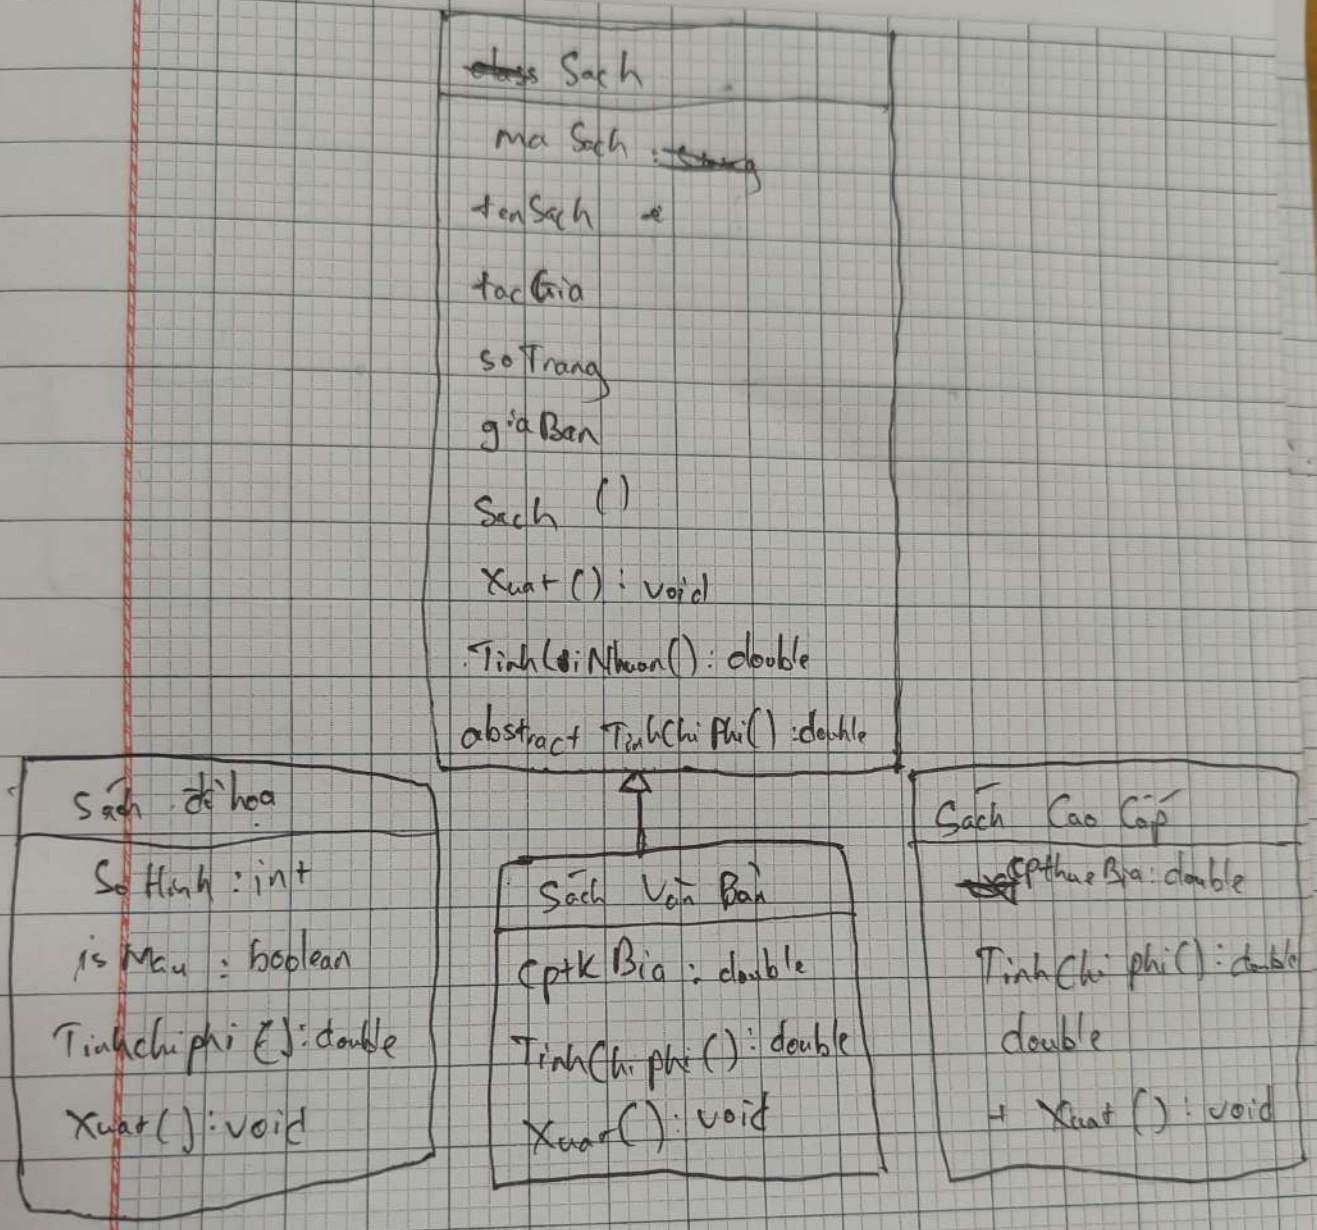

HÒA BÌNH

```
using System;
public abstract class Sach {
```

b.

```
public string MaSach { get; set; }
public string tensach { get; set; }
public string tacgia { get; set; }
public int sotrang { get; set; }
public double GiaBan { get; set; }
```

c.

```
public Sach () {
    MaSach = "S001";
    TenSach = "Hướng đi tương";
    Tac Gia = "Nguyễn Cửu Đàm";
    so Trang = 100;
    Gia ban = 40 000;
}
public virtual void xuat(){
    Console.WriteLine ($"[{MaSach}] {TenSach} - TG:
{tacgia} - {sotrang} trang - Gia: {GiaBan}");
}
```

HÒA BÌNH

```
public abstract double TinhChiphi ();
public double TinhLoiNhuan () {
    double thueSanXuat = GiaBan * 0,03;
    double nhuanBut = GiaBan * 0,2;
    return GiaBan - TinhChiPhi () - thueSanXuat - nhuanBut;
    }
}

public class SachDoHoa : Sach {
    public int soHinhVe { get; set; }
    public bool LaSachMau { get; set; }
    public override double TinhChiPhi () {
        double chiPhiVe = LaSachMau? SoHinhVe*2000: soHinhVe*1200;
        double phiBoGia = 50.000;
        double phiUopThom = soTrang* 200;
        return chiPhiVe + phiBoGia + phiUopThom;
    }
    public override void Xuat() {
        base. Xuat();
        Console. WriteLine($" -> Loại : đồ họa | Lợi nhuận:
```

HÒA BÌNH

{TinhLoiNhuan()}"");

}

}

BT2:

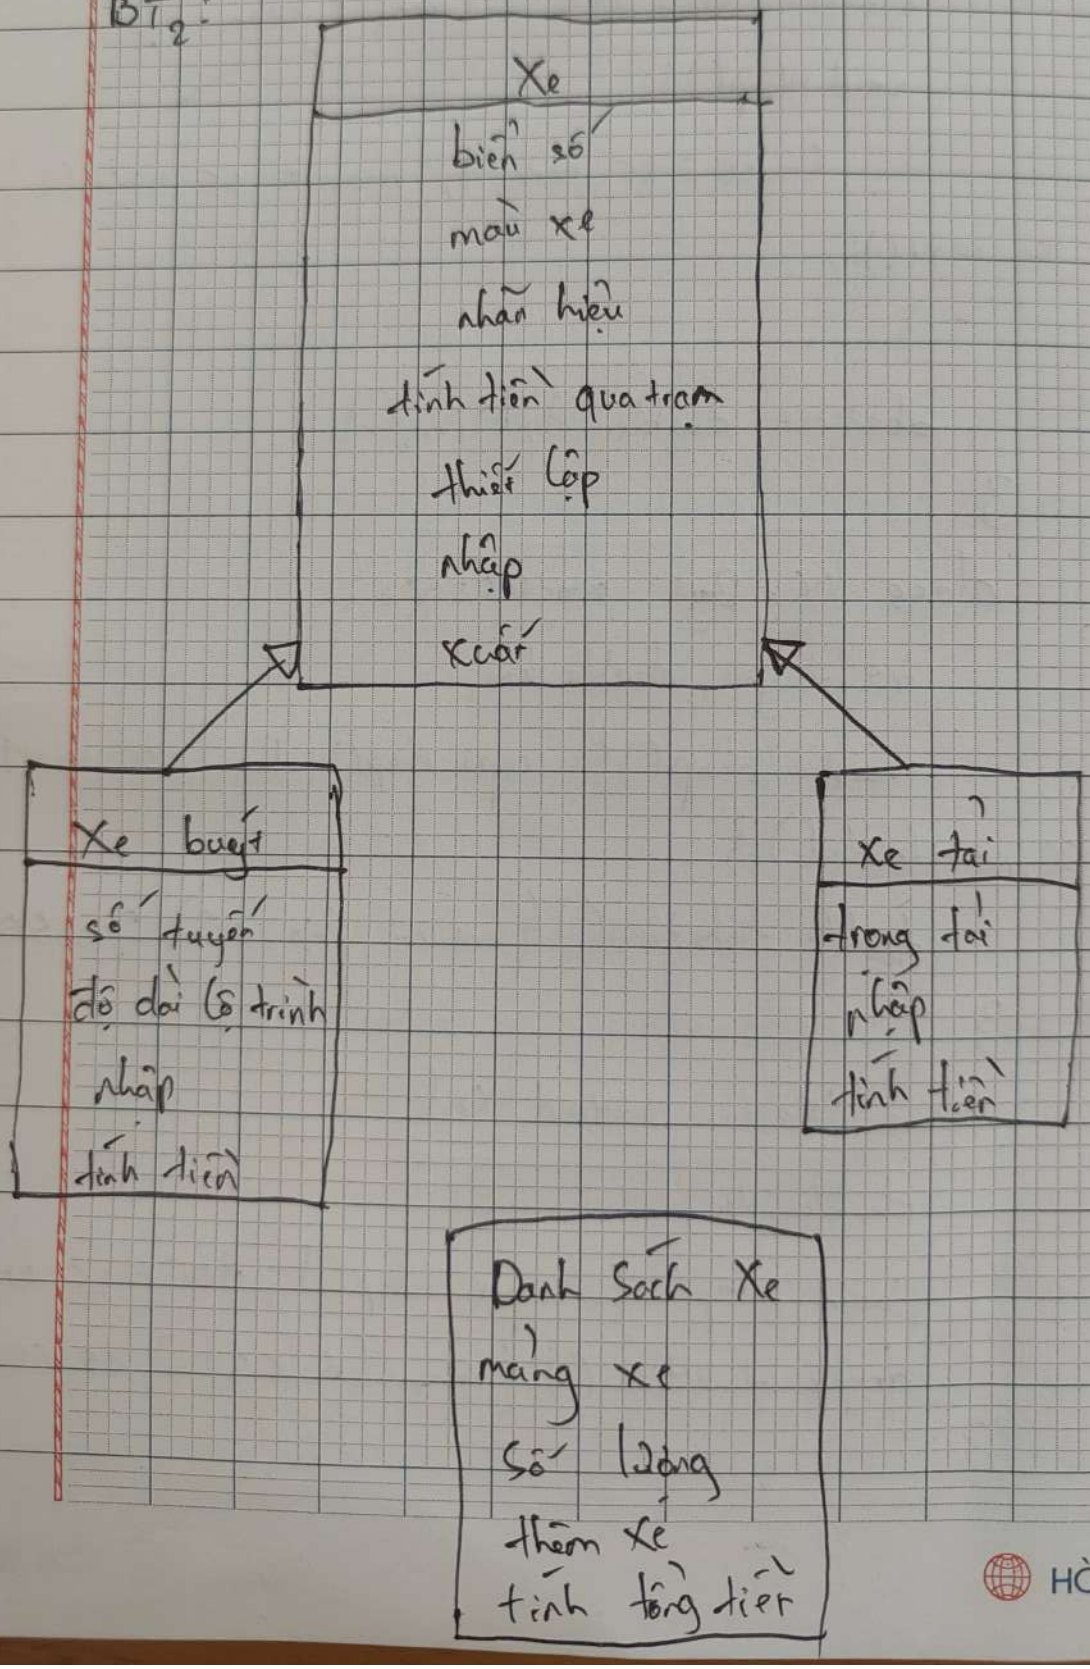

HÒA BÌNH

```
import java.util.scanner
abstract class Xe {
    String bienSo, mau, hieu;
    Scanner sc = new Scanner(System.in);
    void nhap() {
        bienso = sc.next(); mau = sc.next(); hieu =
sc.next();
    }
    abstract double tinhTien();
}
class XeBuyt extends Xe {
    int tuyen; double km;
    void nhap() { super.nhap(); tuyen = sc.nextInt(); Km =
sc.nextdouble(); }
    double tinhtien() { return (tai < 3) ? 15000 : 30000;
}
class Xe tai extend Xe {
    double tai;
    void nhap() { super.nhap(); tai = sc.next double(); }
    double tinhtien() { return (tai < 3) ? 15 000 : 30 000; }
}
```

```
class QLXe{
    xe[] ds = new Xe[100]; int n=0;
    void them(int loai){
        ds[n] = (loai == 1) ? new XeBay+(): new
XeTai();
        ds[n++].nhap();
    }
    void TongTien(){
        double t=0
        for(int i=0; i<n; i++) t+=ds[i].tinhTien();
        System.out.print("Tong: "+t);
    }
}
public class Main{
    public static void main(String[] args){
        Scanner s = new Scaner(System.in);
        QLXe ql = new QLXe();
        int sl = s.nextint();
        for(int i=0; i<sl; i++) ql.them(s.nextint());
        ql.tongTien();
    }
}
```

BT3:

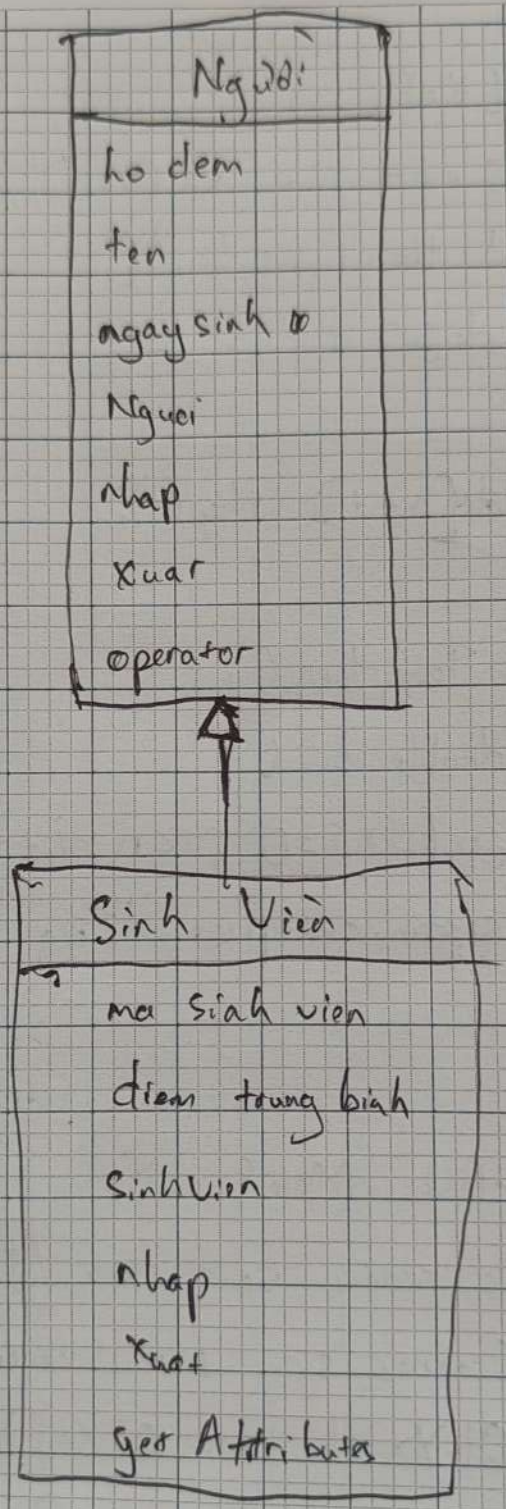
Người
ho dem
ten
ngay sinh
Nguoi
nhap
xuat
operator
Sinh Viên
ma sinh vien
diem trung binh
SinhVien
nhap
xuat
get Attributes

```
#include <iostream>
#include <string>
#include <vector>
#include <algorithm>
using namespace std;
class Nguoi {
protected:
    string hodem;
    string ten;
    int ngay, thang, nam;
public
    Nguoi(): hodem(" "), ten(" "), ngay(1), thang(1),
nam(2000) { }
    ~~virtual void nhap() {~~
    ~~cout~~
    int d, m, y
    void nhap() {cin >> hodem >> ten >> d >> m
>> y;}
    void xuat() {cout << hodem << " " << ten << "
" << d << "/" << m << "/" << y;}
```

```
    bool operator >(Nguoi b) {
        if (ten != b.ten) return ten > b.ten;
        return hodem > b.hodem;
    }
};
class SinhVien : public Nguoi {
public:
    string ma; float dtb;
    void nhap() {Nguoi::nhap(); cin >> ma >> dtb;}
    void xuat() {Nguoi::xuat(); cout << ","<< ma <<","
<< dtb << endl;}
};
int main() {
    int n; cin >> n;
    SinhVien ds[200];
    for (int i=0; i<n; i++) ds[i].nhap();
    for (int i=0; i<n-1; i++)
        for (int j=i+1; j<n; j++)
            if (ds[i] > ds[j]) swap(ds[i], ds[j]);
    cout << "\nDs sau sapxep:\n";
    float max=0;
    for(int i=0; i<n; i++){
```

HÒA BÌNH

```
        ds[i].xuat();
        if (ds[i].dtb > max) max = ds[i].
dtb;
    }
    cout << "\nSV diem cao nhat (" << max <<
): \n";
    for(int i=0; i<n; i++)
        if( ds[i].dtb == max) ds[i].xuat();
    return 0;
}
```