
MongoDB Setup


1.**Account:** Sign-up for MongoDB Atlas using this link:

https://www.mongodb.com/cloud/atlas/register


2.**Cluster:** In the main pane, find »Create a cluster«

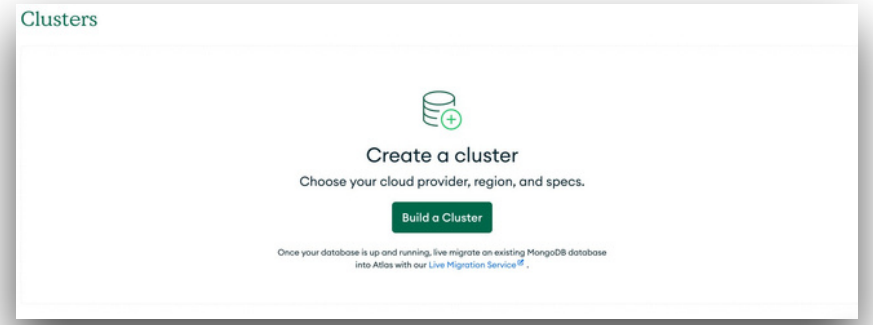


3. **Cluster configuration:** Deploy a »free« cluster and leave default options.

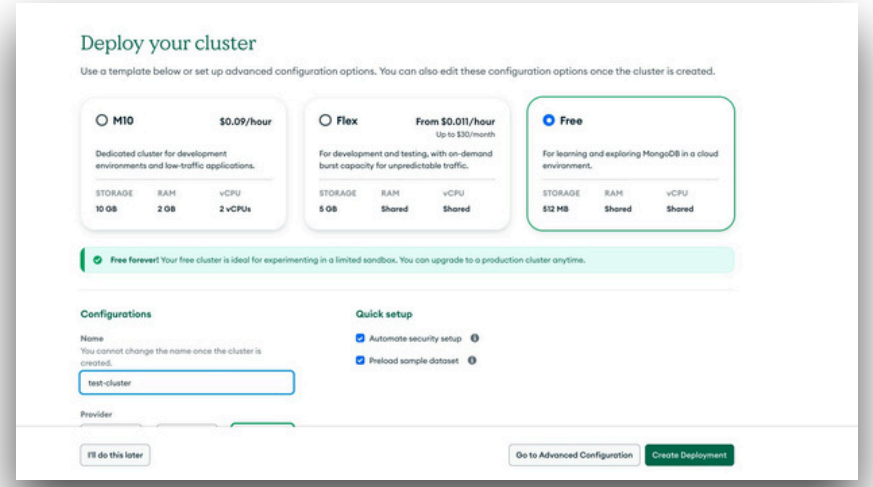


4. **Add user:** Inside your cluster, click on »Browse Collections« and select »Database & Network Access« from the left sidebar. Create a new database user. Store your username and password; you will need it for PySpark.

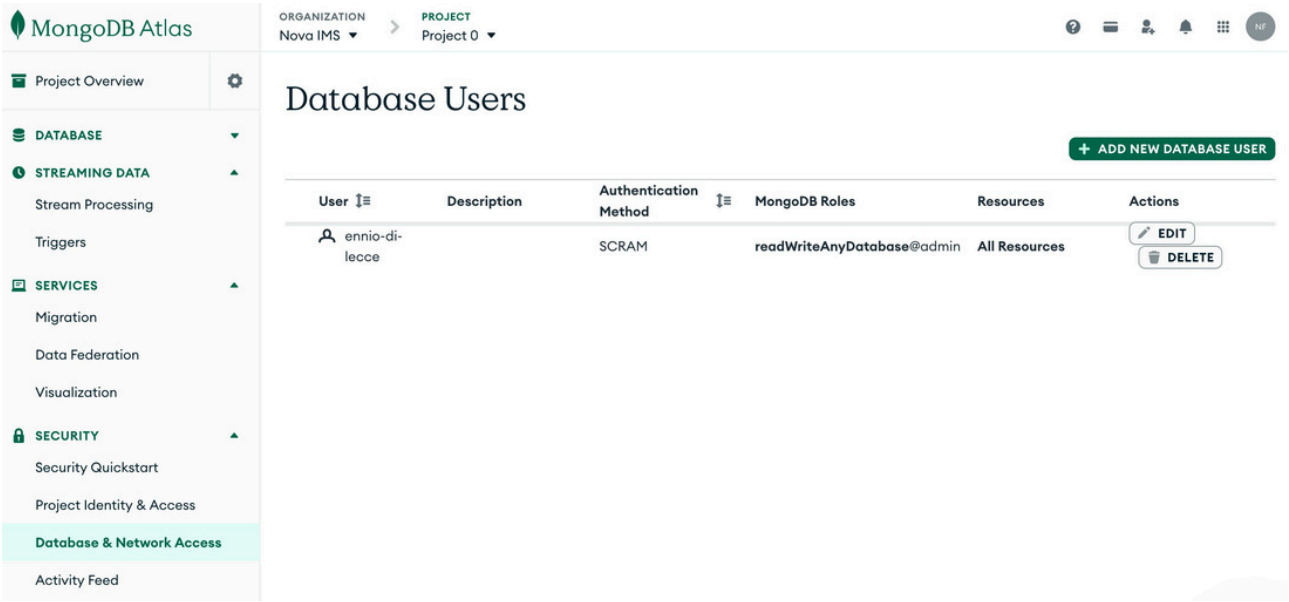

5. **Connection string:** Extract the connection string (here under section 3).

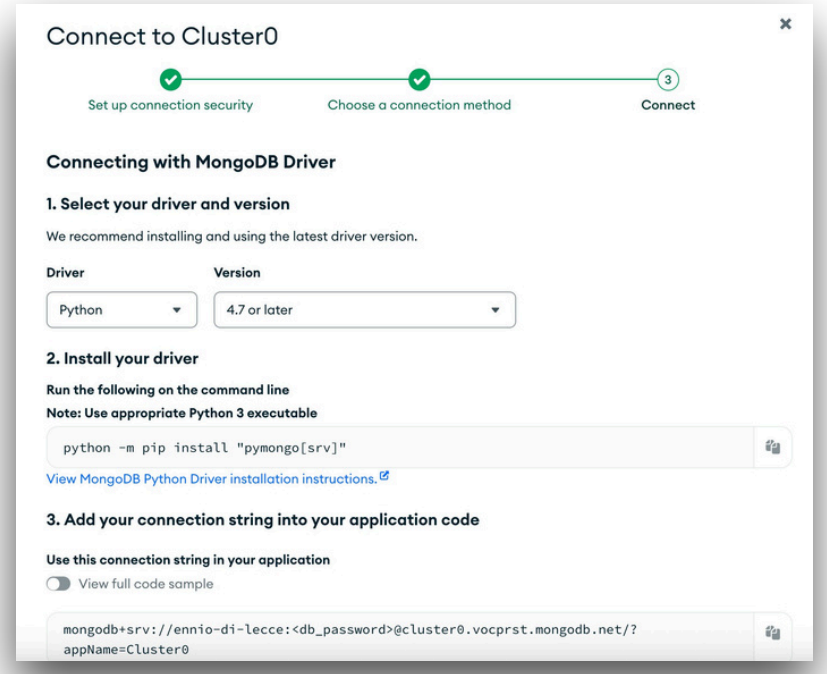

6. **IP address whitelisting:** Whenever we need to connect to our database from a new location, we need to make sure the IP address is whitelisted. We can *ping* in our Jupyter notebook and add the IP address accordingly.

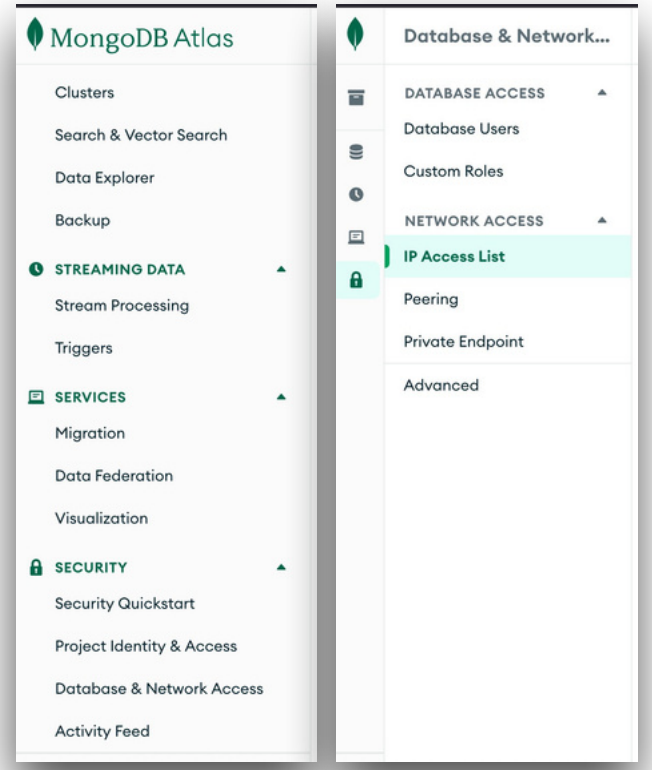

7. **Creating a CIDR address:** The CIDR address 0.0.0.0/0 allows connections from any IPv4 address. Adding it to the MongoDB Atlas IP Access List allows Databricks to connect without needing to register a specific IP address for the notebook environment, which is required for Databricks Free Edition serverless computing.

