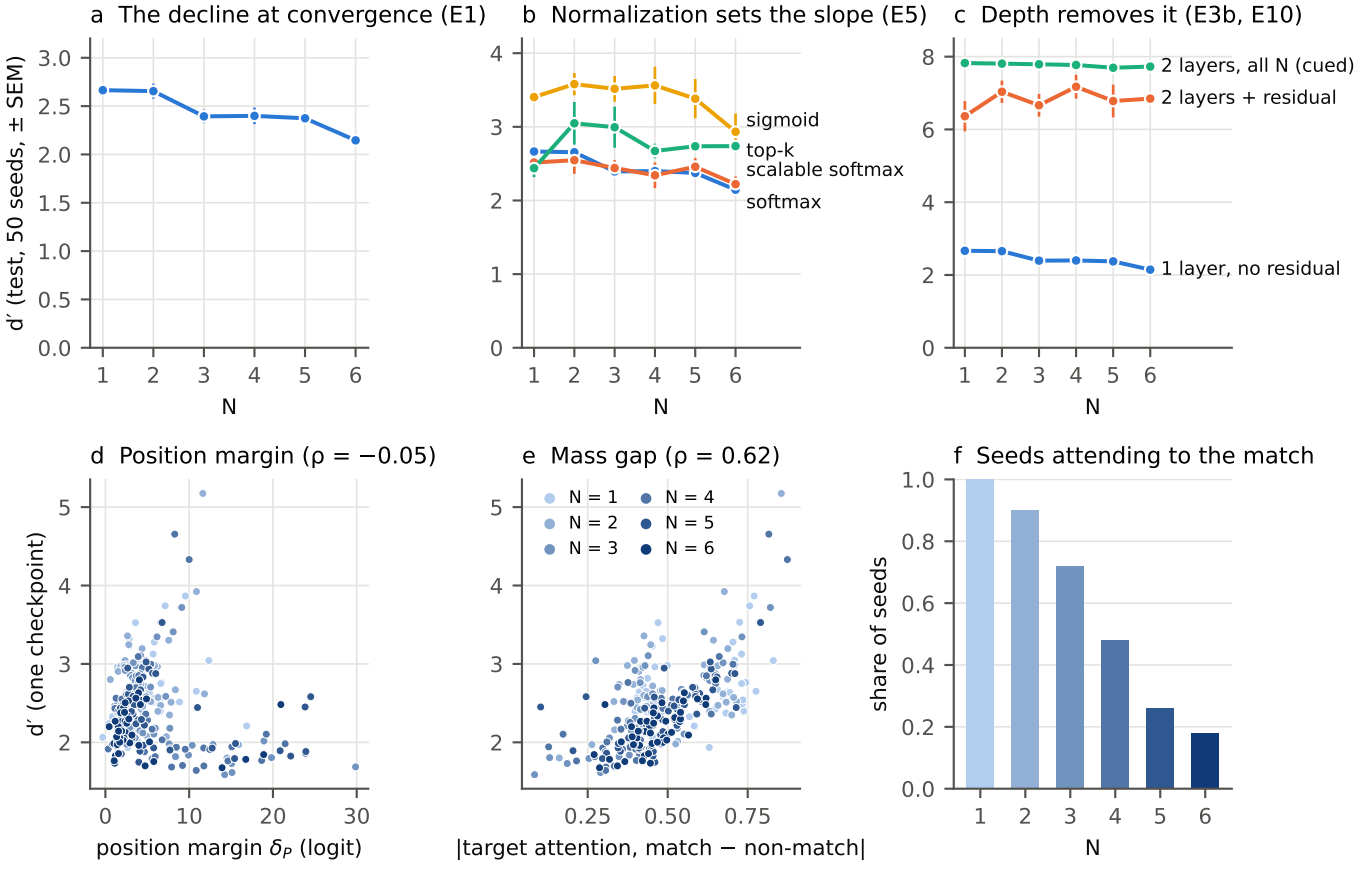
a The decline at convergence (E1)
d′ (test, 50 seeds, ± SEM)
N
b Normalization sets the slope (E5)
sigmoid
top-k
scalable softmax
softmax
N
c Depth removes it (E3b, E10)
2 layers, all N (cued)
2 layers + residual
1 layer, no residual
N
d Position margin (ρ = −0.05)
d′ (one checkpoint)
position margin δ_P (logit)
e Mass gap (ρ = 0.62)
N = 1
N = 2
N = 3
N = 4
N = 5
N = 6
|target attention, match − non-match|
f Seeds attending to the match
share of seeds
N