

Scientific Programming in Python crash course

Inteligencia Artificial en los Sistemas de Control Autónomo
Máster Universitario en Ingeniería Industrial

Departamento de Automática

Objectives

1. Introduce scientific programming problems
2. Efficient matrix computations in Python
3. Visualize data in Python

Bibliography

Jake VanderPlas. Python Data Science Handbook. Chapter 1. O'Reilly. (Link).

Table of Contents

1. The data scientist toolkit

- Motivation
- Overview
- Anaconda
- Conda

2. numpy

- Understanding Data Types in Python

3. NumPy

- Introduction
- NumPy array attributes
- NumPy data types

- NumPy notebook

4. Pandas

- Introduction
- The Pandas **Series** object
- The Pandas **DataFrame** object
- Pandas notebook

5. Data visualization

- Introduction
- Matplotlib
- Matplotlib notebook
- Seaborn
- Seaborn notebook

The data scientist toolkit

Motivation

Data science is about manipulating data

- Need of specialized tools
- Two main languages: R and Python

Python is a general purpose programming language

- Easy integration
- Huge ecosystem of packages and tools

Need of data-oriented tools

- Features provided by third-party tools

The data scientist toolkit

Overview

Tool	Type	Description
conda	Software	Python environments and package management
iPython	Software	Advanced Python interpreter
Jupyter	Software	Python notebooks (Python interpreter)
Numpy	Package	Efficient array operations
Pandas	Package	Dataframe support
Matplotlib	Package	Data visualization
Seaborn	Package	Data visualization with dataframes
Scikit-learn	Package	AI/ML package for Python

The data scientist toolkit

Anaconda

Most of those tools are packaged in *Anaconda*

- Python distribution for Data Science
- Environment management for Python
- Package management system

Anaconda provides *conda*

- Packages management tool
- Environment management for Python

In addition, Anaconda provides *Spyder*

- Python IDE designed for Data Science



The data scientist toolkit

Conda crash introduction

Conda environment for Data Science

1. `conda create --name ml seaborn=0.9.0`
2. `source activate ml`
3. `conda install ipython`
4. `conda install nb_conda`
5. `conda install scikit-learn`

List environments:

```
conda info --envs
```

Activate environment:

```
source activate <env>
```

Install package:

```
conda install <package>
```

List packages:

```
conda list
```

Exit environment (Linux):

```
deactivate
```

Introduction

Understanding Data Types in Python (I)

Static typing

```
/* C code */  
int result = 0;  
for(int i=0; i<100; i++){  
    result += i;  
}
```

- Data types must be declared
- Data types cannot change
- Error detection in compilation
- Variables names are, basically, labels

Dynamic typing

```
# Python code  
result = 0  
for i in range(100):  
    result += i
```

- Data types are not declared
- Data types can change
- Error detection in run-time
- Variables are complex data structures (even for simple types)

Introduction


Understanding Data Types in Python (II)

Dynamic typing must be implemented somewhere ...


Python 3.4 source code

```
struct _longobject {  
    long ob_refcnt;  
    PyTypeObject *ob_type;  
    size_t ob_size;  
    long ob_digit[1];  
};
```

C Integer



Python Integer



Introduction

Understanding Data Types in Python (IV)

Standard Python data types are powerful and flexible

- Flexibility has a price: Reduced performance
- Not an big issue in generic programming
- A big issue in scientific programming
- We require efficient data manipulation mechanisms: NumPy

NumPy: Python package for numeric computation

- Efficient array implementation
- Fast mathematical functions
- Random numbers generation
- Static data types: Less flexibility

Most Python modules for AI/ML depend on NumPy, in particular

- Pandas (dataframes), Scikit-learn (ML), Seaborn (data visualization)

NumPy

Introduction

NumPy must be imported in order to be available

- You can use `np?` or `np.<TAB>`

The main component of NumPy is `ndarray`

- Python object
- Efficient matrix representation
- Homogeneous elements

Convention

```
import numpy as np
```

```
In [1]: array = np.array  
        ([1, 2, 3])  
In [2]: array  
Out[1]: array([1, 2, 3])  
In [3]: array = np.array  
        ([[1, 2], [3, 4]])
```

NumPy

NumPy array attributes

Ndarray objects expose several attributes

- **ndim**: Dimensions
- **shape**: Size of each dimension
- **size**: Number of elements
- **dtype**: Data type
- **itemsize**: Size of each element (in bytes)
- **nbytes**: Size of the array (in bytes)

```
x = np.random.randint(10, size=(3, 4))
print("x ndim: ", x.ndim)
print("x shape:", x.shape)
print("x size: ", x.size)
print("dtype:", x.dtype)
print("itemsize:", x.itemsize)
print("nbytes:", x.nbytes)
```

NumPy

NumPy data types

Python is implemented in C

- Data types in NumPy are based on those in C

Two styles to declare types

- String:
`np.zeros(10,
dtype='int16')`
- NumPy object:
`np.zeros(10,
dtype=np.int16)`

DATA TYPE	DESCRIPTION
<code>bool_</code>	Boolean (True or False) stored as a byte
<code>int_</code>	Default integer type
<code>intc</code>	Identical to C
<code>intp</code>	Integer used for indexing
<code>int8</code>	Byte
<code>int16</code>	Integer
<code>int32</code>	Integer
<code>int64</code>	Integer
<code>uint8</code>	Unsigned integer
<code>uint16</code>	Unsigned integer
<code>uint32</code>	Unsigned integer
<code>uint64</code>	Unsigned integer
<code>float_</code>	Shorthand for float64
<code>float16</code>	Half precision float
<code>float32</code>	Single precision float
<code>float64</code>	Double precision float
<code>complex_</code>	Shorthand for complex128
<code>complex64</code>	Complex number
<code>complex128</code>	Complex number

NumPy

NumPy notebook

NumPy notebook

([Link to notebook](#))

Pandas

Introduction

A DS/ML workflow needs more features

- Missing data
- Data input
- Operations on groups
- Label columns and rows


Pandas provides all those features, and more

- Pandas = **PAN**el **DA**ta **S**ystem
- Built on NumPy's ndarray
- Provides **dataframes**

Pandas provides two main objects

- Series and DataFrame

pandas

$$y_i t = \beta' x_{it} + \mu_i + \epsilon_{it}$$


Convention

```
import numpy as np
import pandas as pd
```


Pandas

The Pandas Series object (I)

A **Series** is a one-dimensional array of indexed data

- NumPy arrays indices are implicit (i.e. its position)
- Series indices are explicit, and can be any type

INDEX	VALUES
'a'	0.25
'b'	0.5
'c'	0.75
'd'	0.99

Two attributes

- **values:** ndarray
- **index:** pd.Index object

Two indices

- Implicit: Regular index
- Explicit: Custom index

```
data = pd.Series([0.25,
                  0.5, 0.75, 1.0])
data.values
data.index
data[1:3]
```

Pandas

The Pandas Series object (II)

Custom indices

```
In [1] : data = pd.Series([0.25, 0.5, 0.75, 1.0],
                          index=['a', 'b', 'c', 'd'])
```

```
In [2]: data
```

```
Out [1]:
```

```
a      0.25
b      0.50
c      0.75
d      1.00
dtype: float64
```

```
In [3]: data['a']
```

```
Out [2]: 0.25
```

```
In [4]: data[0]
```

```
Out [3]: 0.25
```

Pandas


The Pandas DataFrame object (I)

A DataFrame is a 2-D tabular data structure

- Similar to a spreadsheet
- Homogeneous columns
- Heterogeneous rows

Two read-only attributes, both `pd.Index`

- `index`: Rows
- `columns`: Columns



The diagram shows a table representing a DataFrame. The table has three columns: 'Regd. No', 'Name', and 'Marks%'. It has five rows, with the first row being the header. Arrows point from the labels 'Columns' and 'rows' to their respective parts of the table.

Columns		
Regd. No	Name	Marks%
1000	Steve	86.29
1001	Mathew	91.63
1002	Jose	72.90
1003	Patty	69.23
1004	Vin	88.30

rows

(Source)

Pandas

The Pandas DataFrame object (II)

DataFrame example

```
In [1]: import seaborn as sns
```

```
In [2]: iris = sns.load_dataset('iris')
```

```
In [3]: iris.head()
```

```
Out [1]:
```

	sepal_length	sepal_width	petal_length	petal_width	species
0	5.1	3.5	1.4	0.2	setosa
1	4.9	3.0	1.4	0.2	setosa
2	4.7	3.2	1.3	0.2	setosa
3	4.6	3.1	1.5	0.2	setosa
4	5.0	3.6	1.4	0.2	setosa

```
In [246]: iris.columns
```

```
Out [246]:
```

```
Index(['sepal_length', 'sepal_width', 'petal_length',  
      'petal_width', 'species'], dtype='object')
```

Pandas

The Pandas DataFrame object (III)

Read from a file

- Excel:

```
pd.read_excel('filename.xlsx', sheetname='mysheet')
```

- CSV (very common!!!): `pd.read_csv('filename.csv')`

CSV example

```
# This CSV file contains data about weights and heights
"id", "weight", "height", "sex", "race"
1, 143.5, 81.6, "Female", "White"
2, 109.1, 83.7, "Female", "Black"
4, 104.8, 54.6, "Female", "Hisp"
7, 130.2, 81.7, "Male", "White"
```

CVS can be exported from MS Excel or programmatically

Pandas


Pandas notebook

NumPy notebook

[\(Link to notebook\)](#)

Datavisualization

Motivation (I)

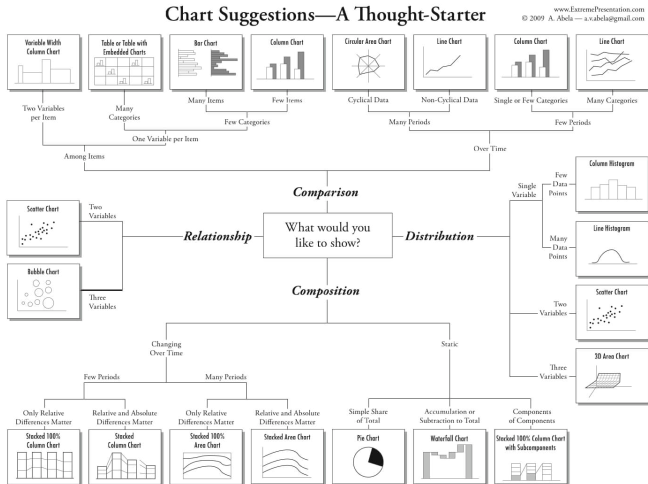

(Source)
(Alternative resource)

Data visualization

Matplotlib (I)

Matplotlib is a Python package

- Based on NumPy
- Imitates Matlab

Three operation modes

- Scripts.
Must use `plt.show()` to enter event loop. Use it once!
- IPython shell.
Must use `%matplotlib`
- IPython notebook. Two modes
 - `%matplotlib inline`
 - `%matplotlib notebook`

Convention

```
import matplotlib as mpl
import matplotlib.pyplot as plt
```

myplot.py

```
import matplotlib.pyplot as plt
import numpy as np

x = np.linspace(0, 10, 100)

plt.plot(x, np.sin(x))
plt.plot(x, np.cos(x))

plt.show()
```


Data visualization

Matplotlib (II)

Matplotlib comes with two interfaces

- Matlab-like. Old-fashioned function-oriented API.
- Object-oriented. Object-oriented and more powerful API.

Matlab API

```

^^ Iplt.figure() # create a plot

^^ I# create the first of two
    panels and set current axis
^^ Iplt.subplot(2, 1, 1) # (rows,
    columns, panel number)
^^ Iplt.plot(x, np.sin(x))

^^ I# create the second panel and
    set current axis
^^ Iplt.subplot(2, 1, 2)
^^ Iplt.plot(x, np.cos(x));
^^ I

```

OO API

```

^^ Iplt.figure() # create a plot

^^ I# create the first of two
    panels and set current axis
^^ Iplt.subplot(2, 1, 1) # (rows,
    columns, panel number)
^^ Iplt.plot(x, np.sin(x))

^^ I# create the second panel and
    set current axis
^^ Iplt.subplot(2, 1, 2)
^^ Iplt.plot(x, np.cos(x));
^^ I

```

Pandas

Matplotlib notebook

Matplotlib notebook

([Link to notebook](#))

Data visualization

Seaborn (I)

Seaborn is a modern data-visualization Python package

- Based on matplotlib
- ... it uses matplotlib indeed
- Pandas-aware
- High level
- Advanced visualizations
- Easy to use

Still under development! (v. 0.9)

Convention

```
import seaborn as sns
```

This documentation is for Seaborn
0.9 or newer

Data visualization

Seaborn (II)

Display initialization

- `plt.show()`
- `%matplotlib`

Style initialization

- Default Seaborn style `sns.set()`
- By default, same style than matplotlib

Several functions ...

- ... similar parameters

Parameters

- `x`: Data axis x
- `y`: Data axis Y
- `data`: Dataframe name
- `hue`: Color
- `style`: Style
- `sizes`: Size
- `kind`: Alternate representation


Data visualization

Seaborn (III)

Typical Seaborn usage

1. Prepare data
2. Set up aesthetics
3. Plot
4. Customize the plot

```
import matplotlib.pyplot as plt
import seaborn as sns
# Prepare data
tips = sns.load_dataset("tips")
# Set up aesthetics
sns.set_style("whitegrid")
# Plot
g = sns.lmplot(x="tip", y="total_bill", data=tips, aspect=2)
# Plot customization
g = (g.set_axis_labels("Tip", "Total bill (USD)").set(xlim=(0, 10), ylim=(0, 100)))
plt.title("title")
plt.show(g)
```

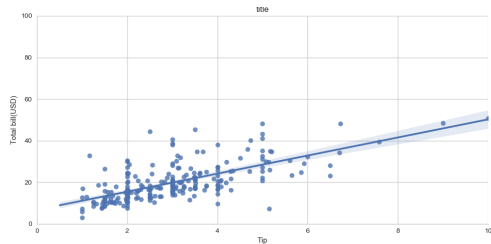

Seaborn

Seaborn notebook

Seaborn notebook

[\(Link to notebook\)](#)