


Task 6 Screenshots

Make + add2pb multiple examples:

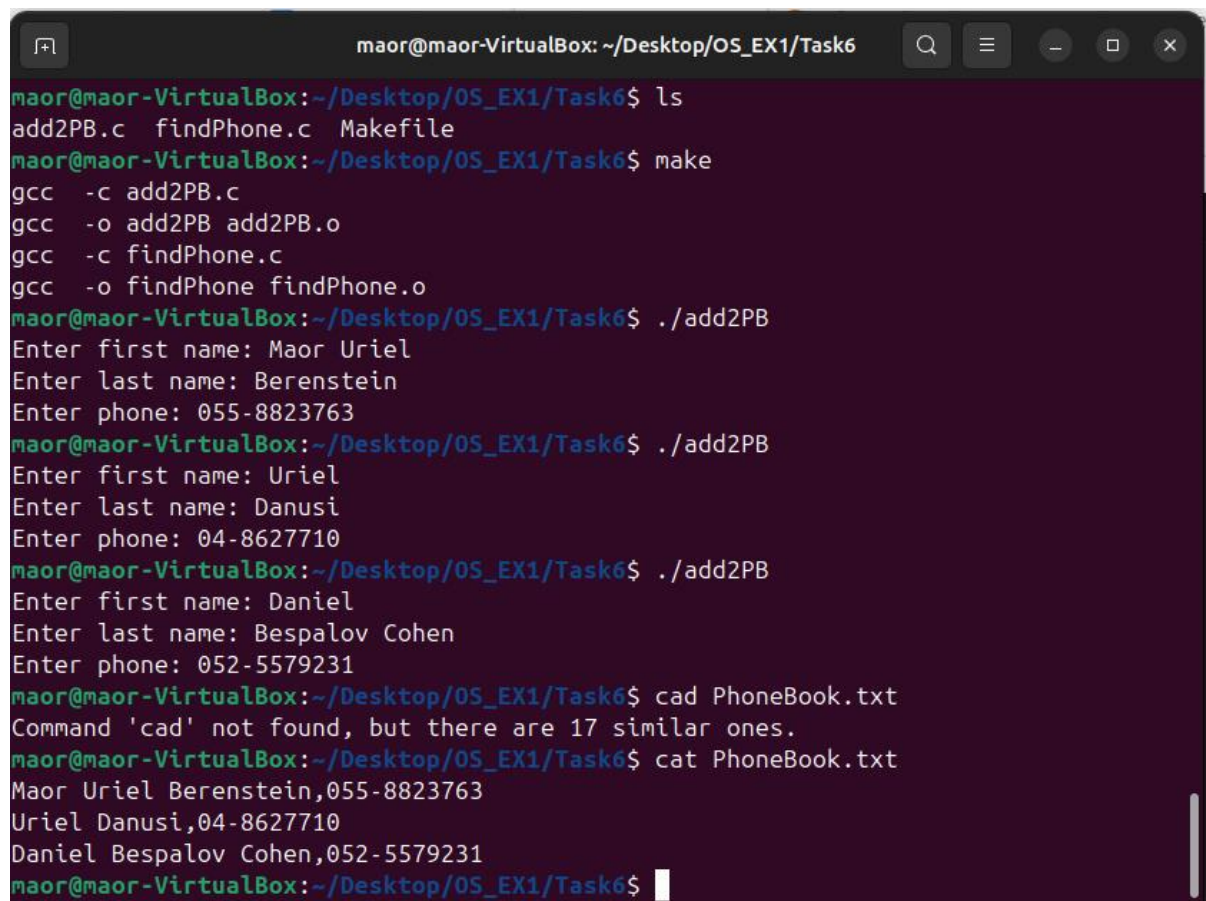


```
maor@maor-VirtualBox: ~/Desktop/OS_EX1/Task6
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ls
add2PB.c  findPhone.c  Makefile
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ make
gcc -c add2PB.c
gcc -o add2PB add2PB.o
gcc -c findPhone.c
gcc -o findPhone findPhone.o
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./add2PB
Enter first name: Maor Uriel
Enter last name: Berenstein
Enter phone: 055-8823763
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./add2PB
Enter first name: Uriel
Enter last name: Danusi
Enter phone: 04-8627710
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./add2PB
Enter first name: Daniel
Enter last name: Bepalov Cohen
Enter phone: 052-5579231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ cad PhoneBook.txt
Command 'cad' not found, but there are 17 similar ones.
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ cat PhoneBook.txt
Maor Uriel Berenstein,055-8823763
Uriel Danusi,04-8627710
Daniel Bepalov Cohen,052-5579231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$
```

findPhone Examples:

With 2 same names

and with family name

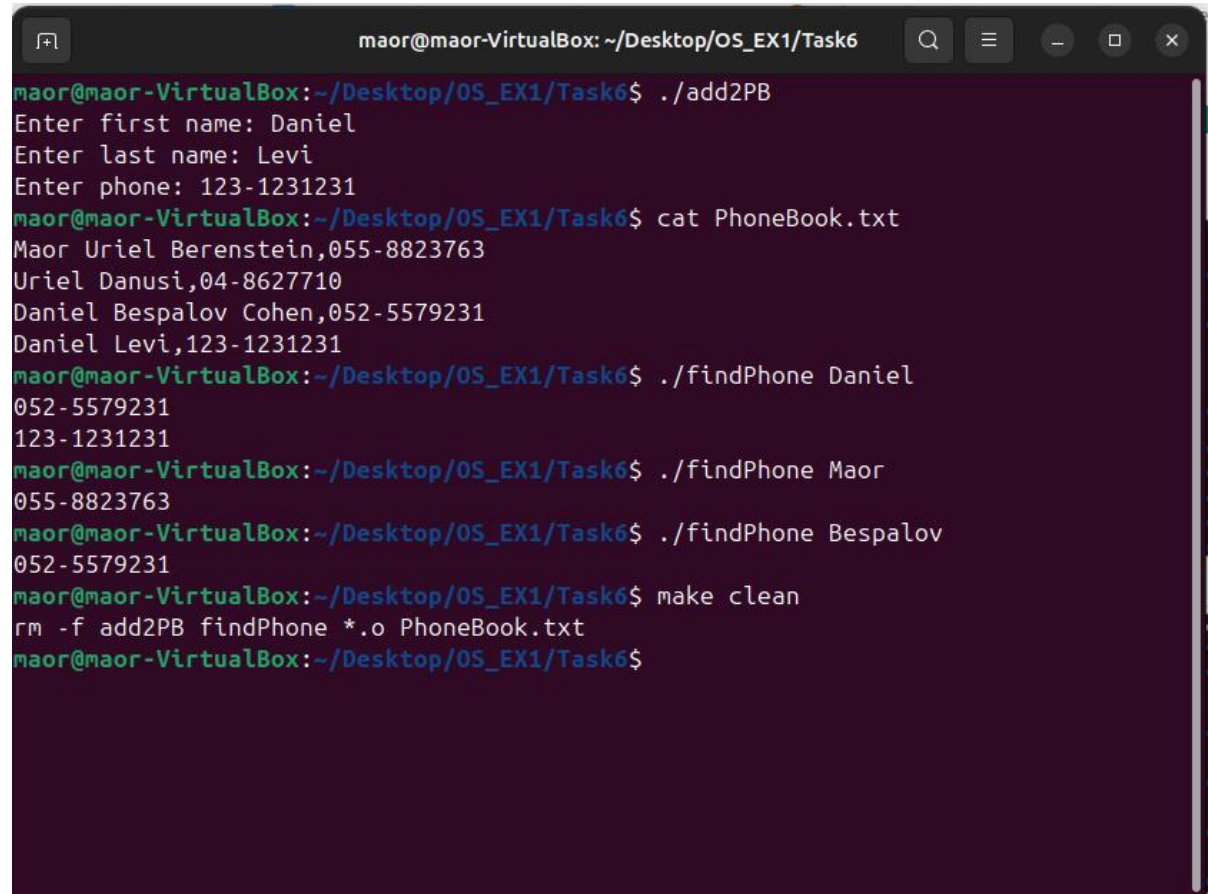A terminal window titled 'maor@maor-VirtualBox: ~/Desktop/OS_EX1/Task6' with standard window controls. The terminal shows the following sequence of commands and outputs:

```
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./add2PB
Enter first name: Daniel
Enter last name: Levi
Enter phone: 123-1231231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ cat PhoneBook.txt
Maor Uriel Berenstein,055-8823763
Uriel Danusi,04-8627710
Daniel Bepalov Cohen,052-5579231
Daniel Levi,123-1231231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./findPhone Daniel
052-5579231
123-1231231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./findPhone Maor
055-8823763
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ ./findPhone Bepalov
052-5579231
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$ make clean
rm -f add2PB findPhone *.o PhoneBook.txt
maor@maor-VirtualBox:~/Desktop/OS_EX1/Task6$
```