

-Paso a paso para hacer pruebas manuales api rest github de recuperación en Postman

Paso 1

Crear Classic Token en github

Se crea accediendo a la siguiente URL: <https://github.com/settings/tokens>

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

What's this token for?

Expiration

 30 days (Jun 19, 2026) ▾

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

☐ repo	Full control of private repositories
☐ repo:status	Access commit status
☐ repo_deployment	Access deployment status
☐ public_repo	Access public repositories
☐ repo:invite	Access repository invitations
☐ security_events	Read and write security events
☐ workflow	Update GitHub Action workflows
☐ write:packages	Upload packages to GitHub Package Registry
☐ read:packages	Download packages from GitHub Package Registry
☐ delete:packages	Delete packages from GitHub Package Registry
☐ admin:org	Full control of orgs and teams, read and write org projects
☐ write:org	Read and write org and team membership, read and write org projects
☐ read:org	Read org and team membership, read org projects
☐ manage_runners:org	Manage org runners and runner groups
☐ admin:public_key	Full control of user public keys
☐ write:public_key	Write user public keys
☐ read:public_key	Read user public keys

Colocar nombre del token y seleccionar solo el apartado de repo, con este ya basta para realizar pruebas de recuperación y dar click al final en generar token.

.


☐ delete_repo	Delete repositories
☐ write:discussion	Read and write team discussions
☐ read:discussion	Read team discussions
☐ admin:enterprise	Full control of enterprises
☐ manage_runners:enterprise	Manage enterprise runners and runner groups
☐ manage_billing:enterprise	Read and write enterprise billing data
☐ read:enterprise	Read enterprise profile data
☐ scim:enterprise	Provisioning of users and groups via SCIM
☐ audit_log	Full control of audit log
☐ read:audit_log	Read access of audit log
☐ codespace	Full control of codespaces
☐ codespace:secrets	Ability to create, read, update, and delete codespace secrets
☐ copilot	Full control of GitHub Copilot settings and seat assignments
☐ manage_billing:copilot	View and edit Copilot Business seat assignments
☐ write:network_configurations	Write org hosted compute network configurations
☐ read:network_configurations	Read org hosted compute network configurations
☐ project	Full control of projects
☐ read:project	Read access of projects
☐ admin:gpg_key	Full control of public user GPG keys
☐ write:gpg_key	Write public user GPG keys
☐ read:gpg_key	Read public user GPG keys
☐ admin:ssh_signing_key	Full control of public user SSH signing keys
☐ write:ssh_signing_key	Write public user SSH signing keys
☐ read:ssh_signing_key	Read public user SSH signing keys

Generate token
Cancel

Paso 2

Teniendo el Código del Token a utilizar te diriges a Postman y configuras tu variable de entorno o environment en el apartado de la parte superior derecha de tu postman, para realizar las pruebas de recuperación más fácilmente.

☐ github
 Fork 0
Share


Variable	Value
☒ GitHub-Test	
Base_url	https://api.github.com
Add variable	

Paso 3

Creamos una coleccion y en esta crearemos métodos http Get donde utilizaremos de base la url : <https://api.github.com> y utilizando esta como base ejecutaremos las siguientes consultas ya con la información previa de api rest de GitHub.

<https://api.github.com/user>
<https://api.github.com/user/repos>
[https://api.github.com/repos/\"nombreuser\"/\"nombrerepositorio\"](https://api.github.com/repos/\)
[https://api.github.com/repos/\"nombreuser\"/\"nombrerepositorio\"/commits](https://api.github.com/repos/\)

estos son breves ejemplos de las consultas que podemos realizar

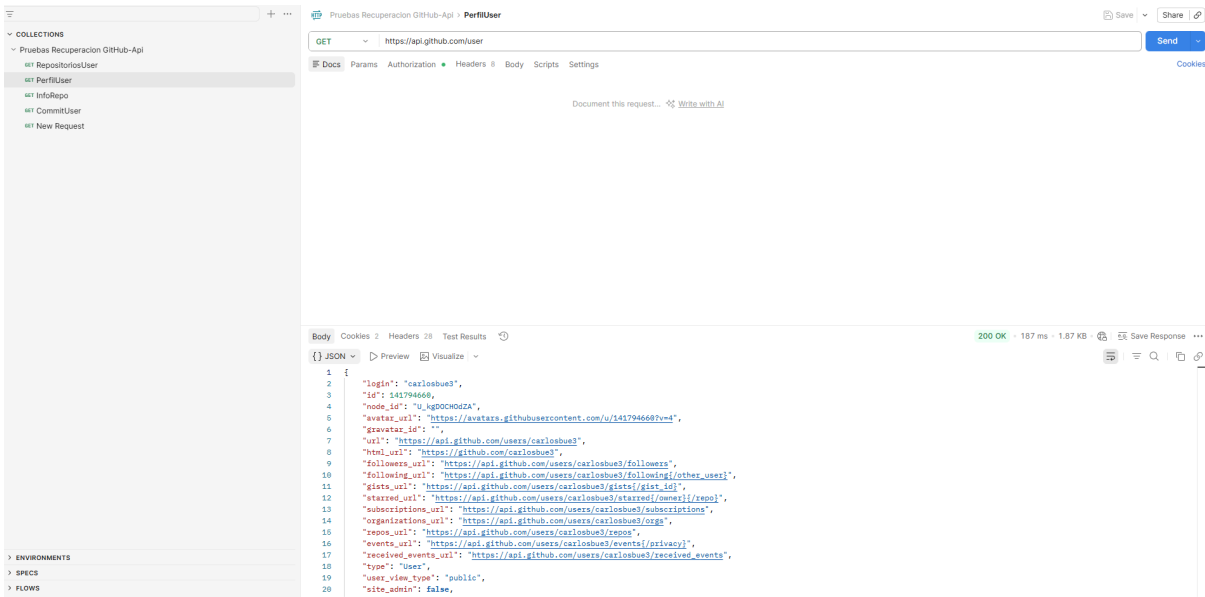

Por último corremos nuestra colección y confirmamos que las pruebas se lograron realizar de manera correcta.

