


1. Crear repositorio

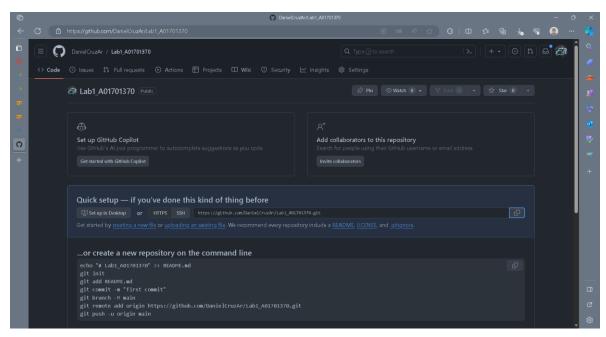

2. Clonar repositorio localmente

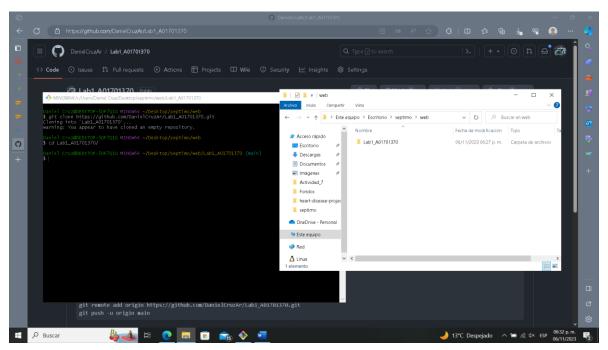

3. Agregar archivos localmente

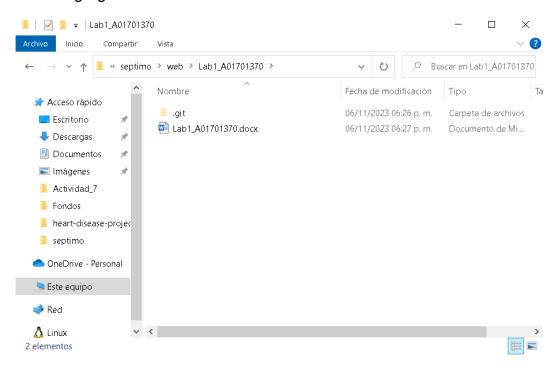

4. Subir los cambios al repositorio remoto

```
Amiel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web

§ git clone https://github.com/OanielCruzar/Lab1_A01701370.git

Cloning into 'Lab1_A01701370'.

warning: You appear to have cloned an empty repository.

Daniel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web

§ cd Lab1_A01701370'

Daniel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web/Lab1_A01701370 (main)

§ git add .

Daniel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web/Lab1_A01701370 (main)

§ git commit -m "Lab1 docx"

[main (root-commit) 1ffe08c] Lab1 docx

2 files changed. 0 insertions(1) 0 deletions(-)

create mode 100644 Lab1_A01701370.docx

create mode 100644 -Ab1_A01701370.docx

Caniel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web/Lab1_A01701370 (main)

§ git push

Enumerating objects: 1, done.

Counting objects: 100% (4/4), done.

Delta compression using up to 8 threads

Compressing objects: 100% (4/4), done.

Writing objects: 100% (4/4), a07.95 kie | 20.53 Mie/s, done.

Total 4 (delta 0), reused 0 (delta 0), pack-reused 0

To https://github.com/DanielCruzAr/Lab1_A01701370.git

* [new branch] main -> main

Daniel Cruz@DESKTOP-5DF701g MINGW64 ~/Desktop/septimo/web/Lab1_A01701370 (main)

§ |
```

