


Pràctica 1

Sistemes de control de versions

Un client encarregat de realitzar formacions a empreses ha decidit crear un curs nou per poder ensenyar javascript aplicat a interaccions amb elements HTML. Per a això, ens ha demanat que implementem una xicoteta pàgina web en la qual mostrem alguns exemples en els quals s'utilitza aquest llenguatge de programació. La seua idea és que el producte final tinga un aspecte similar al següent esquema:

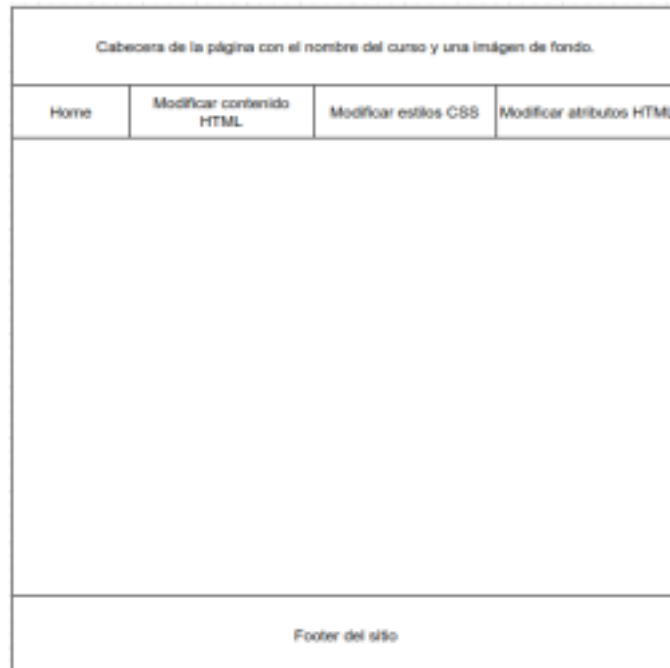

El nostre equip de programadors està compost per 3 persones. Per aquest motiu, hem decidit dividir el treball de la manera següent:

1. L'usuari 1, que és el més experimentat, s'encarregarà de crear el repositori del projecte i implementarà l'estructura inicial de la pàgina en la qual inclourà la capçalera, la barra de navegació amb l'accés a Home i el footer de la pàgina. A la part central del home inclourà una breu descripció del curs.
2. L'usuari 2 crearà la secció de "Modificar contingut HTML" en el qual inclourà algun exemple similar al que existeix en el següent [enllaç](#) així com una explicació d'aquest codi. També desenvoluparà la secció "Modificar atributs HTML"
3. L'usuari 3 que acaba d'arribar a l'empresa implementarà la secció "Modificar estils CSS" de la mateixa manera que ha fet l'usuari 2. Afegirà exemples similars a [aquest](#) (comentant el codi).

A més, a causa de la complexitat del projecte, s'ha decidit seguir la metodologia git Flow per poder realitzar el desenvolupament.

Així doncs, la nostra tasca consistirà a crear un repositori a Github en el qual simulem tota la implementació acordada a més de documentar tot el procés correctament perquè el nostre client veja que som una empresa seriosa i treballem seguint una metodologia (això inclou missatges de commit seguint les bones pràctiques vistes a classe). Aquesta documentació, haurà d' estar inclosa en el github pages del propi repositori del projecte i haurà de contenir:

1. Una introducció teòrica de què és git, la metodologia git flow i per què la utilitzem en el nostre desenvolupament.
2. Explicació detallat del procés realitzat (incloent-hi captures) en el qual:
 1. L'**usuari 1** que és el més experimentat, s'encarregarà de crear el repositori del projecte, per poder utilitzar la metodologia git flow (creació de branques inicials), i implementarà l'estructura inicial del projecte utilitzant el següent boilerplate ([link](#)). Aquesta pàgina inicial inclourà la capçalera, la barra de navegació amb l'accés a Home i el footer de la pàgina.
 2. L'**usuari 2**, crea dos features (feature/contingutHTML i feature/atributsHTML, 1 per cada secció que ha d'implementar).
 3. L '**usuari 3**, crea una feature (feature/estilsCSS) associada al canvi per afegir la seua secció. L'usuari 3, a més, crea una nova release amb totes les features que etiqueta com v1.0.
 4. L'**usuari 1** que s'encarrega de les proves, decideix millorar un poc la secció del contingut creada per l'usuari 2. Per a això, crea un hotfix (hotfix/milloresV_1_0) que efectua aquesta millora.

En finalitzar el treball, el nostre repositori haurà de contenir, a més de les branques necessàries per poder realitzar el desenvolupament comentat, una branca (gh-pages) en la qual s'inclourà tota la documentació del procés i un projecte creat en github en el qual es donarà accés com a col·laborador a l'usuari de github [antoni-gimenez](#). En el canvas d'aquest projecte, hauran d' aparèixer les features i hotfix que s' han creat al llarg d' aquesta activitat amb tota la informació possible.

*Per simular que som l'usuari 1, 2 o 3, en el missatge del commit nom de cadascun d'ells.

1. CREACIÓN DEL REPOSITORIO (Usuari_1)	5
2. TAREA USUARIO 1	7
a. ESTRUCTURA INICIAL	7
3. TAREA USUARIO 2	9
a. FEATURE: ContinugtHTML	9
b. FEATURE: atributsHTML	10
4. TAREA USUARIO 3	12
5. USUARIO 1: HOTFIX	16
6. Creación del Pages	18

1. CREACIÓN DEL REPOSITORIO (Usuari_1)

```
MINGW64:/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo
$ git clone https://github.com/DanielG77/Git_Practicas.git
Cloning into 'Git_Practicas'...
warning: You appear to have cloned an empty repository.

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo
$ cd Git_Practicas/

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ vi README.md

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ vi .gitignore

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ git status
On branch main

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        README.md

nothing added to commit but untracked files present (use "git add" to track)

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ git add .
g
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ git commit -m "Primer Commit"
[main (root-commit) 865d0a2] Primer Commit
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 .gitignore
 create mode 100644 README.md

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (main)
$ git branch -M master

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (master)
$ git push origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 16 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 229 bytes | 229.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/DanielG77/Git_Practicas.git
 * [new branch]      master -> master

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (master)
$ |
```

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (master)
$ git checkout -b develop
Switched to a new branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'develop' on GitHub by visiting:
remote:   https://github.com/DanielG77/Git_Practicas/pull/new/develop
remote:
To https://github.com/DanielG77/Git_Practicas.git
 * [new branch]      develop -> develop

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow init

which branch should be used for bringing forth production releases?
- develop
- master
Branch name for production releases: [master]

which branch should be used for integration of the "next release"?
- develop
Branch name for "next release" development: [develop]

How to name your supporting branch prefixes?
Feature branches? [feature/]
Bugfix branches? [bugfix/]
Release branches? [release/]
Hotfix branches? [hotfix/]
Support branches? [support/]
Version tag prefix? []
Hooks and filters directory? [C:/Users/Daniel/Area de Pruebas/repo/Git_Practicas/.git/hooks]

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

En aquest punt s'elabora l'estructura base que es requerirà al projecte; és a dir, els elements bàsics com les branques master i develop, a més d'habilitar el flux git-flow que s'utilitzarà al llarg del projecte. En altres paraules, és la creació del repositori.

2. TAREA USUARIO 1

a. ESTRUCTURA INICIAL

```
MINGW64~/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas
Hooks and filters directory? [C:/Users/Daniel/Area de Pruebas/repo/Git_Practicas/.git/hooks]

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow feature start estructura_inicial
Switched to a new branch 'feature/estructura_inicial'

Summary of actions:
- A new branch 'feature/estructura_inicial' was created, based on 'develop'
- You are now on branch 'feature/estructura_inicial'

Now, start committing on your feature. When done, use:

    git flow feature finish estructura_inicial

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ vi index.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ vi style.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ git mv style.css styles.css
fatal: not under version control, source=style.css, destination=styles.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ mv style.css styles.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ cat index.html
<!doctype html>
<html lang="es">

<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width,initial-scale=1" />
  <title>Curso: JS aplicado a HTML - Demo</title>
  <link rel="stylesheet" href="styles.css">
</head>

<body>
  <header class="site-header">
    <h1>JS aplicado a interacciones con HTML</h1>
    <nav>
      <a href="#home">Home</a>
      <a href="#contingut">Modificar contenido HTML</a>
      <a href="#atributs">Modificar atributos HTML</a>
      <a href="#estils">Modificar estilos CSS</a>
      <a href="docs/index.html" target="_blank">Documentación</a>
    </nav>
  </header>

  <main>
    <section id="home" class="panel">
      <h2>Bienvenido</h2>
      <p>Breve descripción del curso: aprendemos a usar JavaScript para manipular DOM, atributos y estilos.</p>
    </section>
  </main>
```

```

MINGW64~/Users/Daniel/Area de Pruebas/repo/Git_Practicas
<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width,initial-scale=1" />
  <title>Curso: JS aplicado a HTML - Demo</title>
  <link rel="stylesheet" href="styles.css">
</head>

<body>
  <header class="site-header">
    <h1>JS aplicado a interacciones con HTML</h1>
    <nav>
      <a href="#home">Home</a>
      <a href="#contingut">Modificar contenido HTML</a>
      <a href="#atributs">Modificar atributos HTML</a>
      <a href="#estils">Modificar estilos CSS</a>
      <a href="docs/index.html" target="_blank">Documentación</a>
    </nav>
  </header>

  <main>
    <section id="home" class="panel">
      <h2>Bienvenido</h2>
      <p>Breve descripción del curso: aprendemos a usar JavaScript para manipular DOM, atributos y estilos.</p>
    </section>
  </main>

  <footer class="site-footer">
    <p>Práctica - Sistema de control de versiones (simulación) - Equipo: usuario1, usuario2, usuario3</p>
  </footer>

  <script src="js/app.js"></script>
</body>
</html>
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ cat styles.css
:root{
  --accent:#0066cc;
  --muted:#666;
  --bg:#f9f9f9;
}
*,
:after,
:before{
  box-sizing:border-box;
}
body{font-family:system-ui,-apple-system,Segoe UI,Roboto,Arial; margin:0; background:var(--bg); color:#222; line-height:1.4}
.site-header{background:var(--accent); color:#fff; padding:1rem; max-width:900px; border-radius:8px; box-shadow:0 2px 6px rgba(0,0,0,.06)}
.site-header h1{margin:0; font-size:1.25rem}
nav{margin-top:0.5rem}
nav a{color:#fff; margin-right:0.8rem; text-decoration:none}
.panel{background:#fff; margin:1rem auto; padding:1rem; max-width:900px; border-radius:8px; box-shadow:0 2px 6px rgba(0,0,0,.06)}
code-block{background:#0b1220; color:#9be7ff;padding:0.6rem;border-radius:4px; overflow:auto}
.explain{color:var(--muted); font-size:.95rem}
.box{width:180px;height:100px;border-radius:8px;background:#eee;display:flex;align-items:center;justify-content:center;margin:0.5rem}
.box.active{background:#cfe9ff;border:2px solid var(--accent); transform:scale(1.02)}
.site-footer{text-align:center;padding:1rem;color:var(--muted)}
button{cursor:pointer;padding:.4rem .6rem;border-radius:6px;border:1px solid #ccc;background:#fff}
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$

```

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ git status
On branch feature/estructura_inicial
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    index.html
    styles.css

nothing added to commit but untracked files present (use "git add" to track)

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ git add .
warning: in the working copy of 'index.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'styles.css', LF will be replaced by CRLF the next time Git touches it

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ git commit -m "Create: estructura base"
[feature/estructura_inicial 2248ff8] Create: estructura base
2 files changed, 56 insertions(+)
create mode 100644 index.html
create mode 100644 styles.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estructura_inicial)
$ git flow feature finish estructura_inicial
Switched to branch 'develop'
Updating 865d0a2..2248ff8
Fast-forward
 index.html | 37 +++++
 styles.css | 19 +++++
 2 files changed, 56 insertions(+)
 create mode 100644 index.html
 create mode 100644 styles.css
Deleted branch feature/estructura_inicial (was 2248ff8).

Summary of actions:
- The feature branch 'feature/estructura_inicial' was merged into 'develop'
- Feature branch 'feature/estructura_inicial' has been locally deleted
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 16 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 1.40 KiB | 1.40 MiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/DanielG77/Git_Practicas.git
 865d0a2..2248ff8 develop -> develop

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

Respecte el punto 2 es trata de la creació, ara més correcta, de l'estructura d'arxius que utilitzaran la resta d'usuaris durant la creació del projecte, deixant una base de l'índex i un full d'estils que serà reutilitzat per a la resta d'arxius, realitzada per l'usuari 1.

3. TAREA USUARIO 2

a. FEATURE: ContinugtHTML

```
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ vi modificar_contenido

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ mv modificar_contenido modificar_contenido.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ cat modificar_contenido.html
<!DOCTYPE html>
<html>

<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width,initial-scale=1" />
  <title>Curso: JS aplicado a HTML - Demo</title>
  <link rel="stylesheet" href="styles.css">
</head>

<body>
  <header class="site-header">
    <h1>JS aplicado a interacciones con HTML</h1>
    <nav>
      <a href="index.html">Home</a>
      <a href="modificar_contenido.html">Modificar contenido HTML</a>
      <a href="#atributs">Modificar atributos HTML</a>
      <a href="#estils">Modificar estilos CSS</a>
      <a href="docs/index.html" target="_blank">Documentación</a>
    </nav>
  </header>
  <main>
    <section id="home" class="panel">

      <h2>What Can JavaScript Do?</h2>

      <p id="demo">JavaScript can change HTML content.</p>

      <button type="button" onclick='document.getElementById("demo").innerHTML = "Hello JavaScript!">Click Me!</button>
    </section>
  </main>
  <footer class="site-footer">
    <p>Práctica - Sistema de control de versiones (simulación) - Equipo: usuario1, usuario2, usuario3</p>
  </footer>

  <script src="js/app.js"></script>
</body>

</html>
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ vi index.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ |

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ git status
On branch feature/feature/contingutHTML
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   index.html

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    modificar_contenido.html

no changes added to commit (use "git add" and/or "git commit -a")
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ git add .

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ git commit -m "Usuari2: Creacio y Insercio de Modificar_contenidoHTML"
[feature/feature/contingutHTML dcc5259] Usuari2: Creacio y Insercio de Modificar_contenidoHTML
 2 files changed, 45 insertions(+), 3 deletions(-)
 create mode 100644 modificar_contenido.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$
```

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ git push -u origin feature/feature/contingutHTML
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 16 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 717 bytes | 717.00 KiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
remote:
remote: Create a pull request for 'feature/feature/contingutHTML' on GitHub by visiting:
remote:   https://github.com/DanielG77/Git_Practicas/pull/new/feature/feature/contingutHTML
remote:
To https://github.com/DanielG77/Git_Practicas.git
 * [new branch]      feature/feature/contingutHTML -> feature/feature/contingutHTML
branch 'feature/feature/contingutHTML' set up to track 'origin/feature/feature/contingutHTML'.

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/feature/contingutHTML)
$ git flow feature finish feature/contingutHTML
Switched to branch 'develop'
Updating 2248ff8..dcc5259
Fast-forward
 index.html | 6 +---
 modificar_contenido.html | 42 +-----
 2 files changed, 45 insertions(+), 3 deletions(-)
 create mode 100644 modificar_contenido.html
To https://github.com/DanielG77/Git_Practicas.git
 - [deleted]      feature/feature/contingutHTML
Deleted branch feature/feature/contingutHTML (was dcc5259).

Summary of actions:
- The feature branch 'feature/feature/contingutHTML' was merged into 'develop'
- Feature branch 'feature/feature/contingutHTML' has been locally deleted; it has been remotely deleted from 'origin'
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
bash: git: command not found

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 16 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 717 bytes | 717.00 KiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To https://github.com/DanielG77/Git_Practicas.git
 2248ff8..dcc5259 develop -> develop

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

b. FEATURE: atributsHTML

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow feature start atributsHTML
Switched to a new branch 'feature/atributsHTML'

Summary of actions:
- A new branch 'feature/atributsHTML' was created, based on 'develop'
- You are now on branch 'feature/atributsHTML'

Now, start committing on your feature. When done, use:

    git flow feature finish atributsHTML

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ vi
.git/ .gitignore README.md index.html modificar_contenido.html styles.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ vi modificar_atributo.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ vi index.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ vi modificar_contenido.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ |

```

Per a la tasca 3 de l'usuari 2, utilitza les dues *features* que s'indiquen al fitxer, intentant dividir el treball en diversos *commits* i reutilitzar el codi de l'usuari 1. Mantingues els missatges de *commit* clars, descriptius i tan breus com siga possible.

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git status
On branch feature/atributsHTML
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   index.html
        modified:   modificar_contenido.html

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        modificar_atributo.html

no changes added to commit (use "git add" and/or "git commit -a")

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git add .
warning: in the working copy of 'modificar_atributo.html', LF will be replaced by CRLF the next time Git touches it

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git staus
git: 'staus' is not a git command. See 'git --help'.

The most similar command is
    status

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git status
On branch feature/atributsHTML
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   index.html
        new file:   modificar_atributo.html
        modified:   modificar_contenido.html

```

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git commit -m "Usuario2: creacio y insercion de modificar_atributos"
[feature/atributsHTML d1ab9d3] Usuario2: creacio y insercion de modificar_atributos
3 files changed, 45 insertions(+), 3 deletions(-)
create mode 100644 modificar_atributo.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/atributsHTML)
$ git flow feature finish atributsHTML
Switched to branch 'develop'
Updating dcc5259..d1ab9d3
Fast-forward
   index.html | 4 +--
   modificar_atributo.html | 42 ++++++
   modificar_contenido.html | 2 +-
   3 files changed, 45 insertions(+), 3 deletions(-)
   create mode 100644 modificar_atributo.html
Deleted branch feature/atributsHTML (was d1ab9d3).

Summary of actions:
- The feature branch 'feature/atributsHTML' was merged into 'develop'
- Feature branch 'feature/atributsHTML' has been locally deleted
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 16 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 860 bytes | 860.00 KiB/s, done.
Total 5 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 2 local objects.
To https://github.com/DanielG77/Git_Practicas.git
   dcc5259..d1ab9d3  develop -> develop

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

4. TAREA USUARIO 3

a. Feature: StilsCSS

```
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow feature start estilsCSS
Switched to a new branch 'feature/estilsCSS'

Summary of actions:
- A new branch 'feature/estilsCSS' was created, based on 'develop'
- You are now on branch 'feature/estilsCSS'

Now, start committing on your feature. When done, use:

    git flow feature finish estilsCSS

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ vi modificar_css.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ vi modificar_atributo.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ vi modificar_contenido.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ vi index.html
```

```
</html>
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ vi modificar_css.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ cat modificar_css.html
<!DOCTYPE html>
<html>

<head>
  <meta charset="utf-8" />
  <meta name="viewport" content="width=device-width,initial-scale=1" />
  <title>Curso: JS aplicado a HTML - Demo</title>
  <link rel="stylesheet" href="styles.css">
</head>

<body>
  <header class="site-header">
    <h1>JS aplicado a interacciones con HTML</h1>
    <!-- Esta es la cabecera de navegacion que nos permite movernos por la aplicacion -->
    <nav>
      <a href="index.html">Home</a>
      <a href="modificar_contenido.html">Modificar contenido HTML</a>
      <a href="modificar_atributo.html">Modificar atributos HTML</a>
      <a href="modificar_css.html">Modificar estilos CSS</a>
      <a href="docs/index.html" target="_blank">Documentación</a>
    </nav>
  </header>
  <main>
    <section id="home" class="panel">

      <h2>What can JavaScript Do?</h2>

      <p id="demo">JavaScript can change the style of an HTML element.</p>

      <button type="button" onclick="document.getElementById('demo').style.fontSize='35px'">Click Me!</button>
      <!-- Al pulsar el boton es sustituir los valores predeterminados al styles.css -->
    </section>
  </main>
  <footer class="site-footer">
    <p>Práctica - Sistema de control de versiones (simulación) - Equipo: usuario1, usuario2, usuario3</p>
  </footer>
  <!-- El footer esta preparado para ofrecer informacion a futuro de marcas relacionadas o diversa informacion de la web -->

  <script src="js/app.js"></script>

</body>
```

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ git status
On branch feature/estilsCSS
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   index.html
        modified:   modificar_atributo.html
        modified:   modificar_contenido.html

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        modificar_css.html

no changes added to commit (use "git add" and/or "git commit -a")

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ git add .

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ git commit -m "Usuario3: Creacion y Insercion de modificar_css"
[feature/estilsCSS df91b38] Usuario3: Creacion y Insercion de modificar_css
4 files changed, 47 insertions(+), 3 deletions(-)
create mode 100644 modificar_css.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ git flow feature finish estilsCSS
Fatal: Branch 'feature/estilsCSS' does not exist and is required.

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (feature/estilsCSS)
$ git flow feature finish estilsCSS
Switched to branch 'develop'
Updating d1ab9d3..df91b38
Fast-forward
 index.html | 2 +-
 modificar_atributo.html | 2 +-
 modificar_contenido.html | 2 +-
 modificar_css.html | 44 +++++++++++++++++++++++++++++++++++++++++++++++++++++
 4 files changed, 47 insertions(+), 3 deletions(-)
 create mode 100644 modificar_css.html
Deleted branch feature/estilsCSS (was df91b38).

Summary of actions:
- The feature branch 'feature/estilsCSS' was merged into 'develop'
- Feature branch 'feature/estilsCSS' has been locally deleted
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 16 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 1.03 KiB | 1.03 MiB/s, done.
Total 6 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 3 local objects.
To https://github.com/DanielG77/Git_Practicas.git
 d1ab9d3..df91b38 develop -> develop

```

En aquest punt, com indica la pràctica, he dividit aquest apartat en la **release** i la **feature**, realitzant els canvis indicats a l'exercici i aplicant els *commits* que he considerat oportuns durant la feature, ja que és una xicoteta quantitat de canvis realitzats al contingut original.

b. Creación de la Realis

```
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow release start 1.0
Fatal: Tag '1.0' already exists. Pick another name.

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow release start 1.1
Branches 'develop' and 'origin/develop' have diverged.
And local branch 'develop' is ahead of 'origin/develop'.
Switched to a new branch 'release/1.1'

Summary of actions:
- A new branch 'release/1.1' was created, based on 'develop'
- You are now on branch 'release/1.1'

Follow-up actions:
- Bump the version number now!
- Start committing last-minute fixes in preparing your release
- when done, run:

    git flow release finish '1.1'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (release/1.1)
$ vi README.md

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (release/1.1)
$ git add .

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (release/1.1)
$ git commit -m "Usuario3: Incorporacion de Documentacion del Proyecto"
[release/1.1 9d82548] Usuario3: Incorporacion de Documentacion del Proyecto
1 file changed, 1 insertion(+), 1 deletion(-)

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (release/1.1)
$ git flow release finish 1.1
```

```

Switched to branch 'master'
Your branch is based on 'origin/main', but the upstream is gone.
(use "git branch --unset-upstream" to fixup)
Merge made by the 'ort' strategy.
 README.md | 17 ++++++
 index.html | 37 ++++++
 modificar_atributo.html | 42 ++++++
 modificar_contenido.html | 42 ++++++
 modificar_css.html | 44 ++++++
 styles.css | 19 ++++++
 6 files changed, 201 insertions(+)
 create mode 100644 index.html
 create mode 100644 modificar_atributo.html
 create mode 100644 modificar_contenido.html
 create mode 100644 modificar_css.html
 create mode 100644 styles.css
Already on 'master'
Your branch is based on 'origin/main', but the upstream is gone.
(use "git branch --unset-upstream" to fixup)
Switched to branch 'develop'
Merge made by the 'ort' strategy.
 README.md | 17 ++++++
 1 file changed, 17 insertions(+)
Deleted branch release/1.0 (was 869a9b2).

Summary of actions:
- Release branch 'release/1.0' has been merged into 'master'
- The release was tagged '1.0'
- Release tag '1.0' has been back-merged into 'develop'
- Release branch 'release/1.0' has been locally deleted
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

5. USUARIO 1: HOTFIX

```
Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git flow hotfix start millloresv_1_0
Branches 'master' and 'origin/master' have diverged.
And local branch 'master' is ahead of 'origin/master'.
Switched to a new branch 'hotfix/millloresv_1_0'

Summary of actions:
- A new branch 'hotfix/millloresv_1_0' was created, based on 'master'
- You are now on branch 'hotfix/millloresv_1_0'

Follow-up actions:
- Start committing your hot fixes
- Bump the version number now!
- When done, run:

    git flow hotfix finish 'millloresv_1_0'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (hotfix/millloresv_1_0)
$ vi modificar_atributo.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (hotfix/millloresv_1_0)
$ vi modificar_contenido.html

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (hotfix/millloresv_1_0)
$ git add .

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (hotfix/millloresv_1_0)
$ git commit -m "Usuari1 fix(hotfix) Millora del Footer -modificar_contingut -modificar_atribut"
[hotfix/millloresv_1_0 b8c7706] Usuari1 fix(hotfix) Millora del Footer -modificar_contingut -modificar_atribut
2 files changed, 4 insertions(+), 2 deletions(-)

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (hotfix/millloresv_1_0)
$ git flow hotfix finish millloresv_1_0
```

```
MINGW64:/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas
Merge branch 'hotfix/millloresv_1_0'
# Please enter a commit message to explain why this merge is necessary,
# especially if it merges an updated upstream into a topic branch.
#
# Lines starting with '#' will be ignored, and an empty message aborts
# the commit.
~
~
~
~
~
~
~
```

```
MINGW64:/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas
millloresv_1_0|
#
# Write a message for tag:
#   millloresv_1_0
# Lines starting with '#' will be ignored.
~
~
~
~
~
~
~
```

 MINGW64:/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas

Merge tag 'millloresV_1_0' into develop

millloresV_1_0

Please enter a commit message to explain why this merge is necessary,
especially if it merges an updated upstream into a topic branch.

#

Lines starting with '#' will be ignored, and an empty message aborts
the commit.

~

~

~

~

~

Branches 'master' and 'origin/master' have diverged.
And local branch 'master' is ahead of 'origin/master'.
Branches 'develop' and 'origin/develop' have diverged.
And local branch 'develop' is ahead of 'origin/develop'.
Switched to branch 'master'
Your branch is based on 'origin/main', but the upstream is gone.
(use "git branch --unset-upstream" to fixup)
Merge made by the 'ort' strategy.

modificar_atributo.html | 3 ++-
modificar_contenido.html | 3 ++-
2 files changed, 4 insertions(+), 2 deletions(-)

Switched to branch 'develop'

Merge made by the 'ort' strategy.
modificar_atributo.html | 3 ++-
modificar_contenido.html | 3 ++-
2 files changed, 4 insertions(+), 2 deletions(-)
deleted branch hotfix/millloresV_1_0 (was b8c7706).

Summary of actions:

- Hotfix branch 'hotfix/millloresV_1_0' has been merged into 'master'
- The hotfix was tagged 'millloresV_1_0'
- Hotfix tag 'millloresV_1_0' has been back-merged into 'develop'
- Hotfix branch 'hotfix/millloresV_1_0' has been locally deleted
- You are now on branch 'develop'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)

\$

```

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin develop
Enumerating objects: 17, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 16 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (11/11), 1.79 KiB | 1.79 MiB/s, done.
Total 11 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 3 local objects.
To https://github.com/DanielG77/Git_Practicas.git
   df91b38..4d626d1  develop -> develop

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git push origin master
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/DanielG77/Git_Practicas.git
   865d0a2..d0dbd17  master -> master

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ |

```

6. Creación del Pages

```

MINGW64:/c/Users/Daniel/Area de Pruebas/repo/Git_Practicas

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (develop)
$ git checkout --orphan gh-pages
Switched to a new branch 'gh-pages'

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)
$ ls -a
./ ../ .git/ .gitignore README.md index.html modificar_atributo.html modificar_contenido.html modificar_css.html styles.css

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)
$ ls -a
./ ../ .git/ .gitignore README.md captures/ index.html projecte-canvas.pdf

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)
$ git add .
warning: in the working copy of 'index.html', LF will be replaced by CRLF the next time Git touches it

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)
$ git commit -m "Creacio del pages: documentacio y captures"
[gh-pages (root-commit) da2b4f3] Creacio del pages: documentacio y captures
36 files changed, 210 insertions(+)
create mode 100644 .gitignore
create mode 100644 README.md
create mode 100644 captures/captura1.png
create mode 100644 captures/captura2.png
create mode 100644 captures/captura3.png
create mode 100644 captures/captura4.png
create mode 100644 captures/captura5.png
create mode 100644 captures/captura6.png
create mode 100644 captures/captura7.png
create mode 100644 captures/captura8.png
create mode 100644 captures/captura9.png
create mode 100644 captures/captura91.png
create mode 100644 captures/captura92.png
create mode 100644 captures/captura93.png
create mode 100644 captures/captura94.png
create mode 100644 captures/captura95.png
create mode 100644 captures/captura96.png
create mode 100644 captures/captura97.png
create mode 100644 captures/captura98.png
create mode 100644 captures/captura99.png
create mode 100644 captures/captura991.png
create mode 100644 captures/captura992.png
create mode 100644 captures/captura993.png
create mode 100644 captures/captura994.png
create mode 100644 captures/captura995.png
create mode 100644 index.html
create mode 100644 projecte-canvas.pdf

```

```

create mode 100644 captures/captura9991.png
create mode 100644 captures/captura9992.png
create mode 100644 captures/captura9993.png
create mode 100644 captures/captura9994.png
create mode 100644 captures/captura9995.png
create mode 100644 index.html
create mode 100644 projecte-canvas.pdf

Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)
$ git push -u origin gh-pages
Enumerating objects: 39, done.
Counting objects: 100% (39/39), done.
Delta compression using up to 16 threads
Compressing objects: 100% (38/38), done.
Writing objects: 100% (39/39), 2.77 MiB | 2.08 MiB/s, done.
Total 39 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'gh-pages' on GitHub by visiting:
remote:   https://github.com/DanielG77/Git_Practicas/pull/new/gh-pages
remote:
To https://github.com/DanielG77/Git_Practicas.git
 * [new branch]      gh-pages -> gh-pages
branch 'gh-pages' set up to track 'origin/gh-pages'.


Daniel@DESKTOP-NRT6F6P MINGW64 ~/Area de Pruebas/repo/Git_Practicas (gh-pages)

```

The screenshot shows the GitHub Pages settings interface. On the left is a sidebar with navigation options: General, Access, Collaborators, Moderation options, Code and automation, Branches, Tags, Rules, Actions, Models (with a 'Preview' button), Webhooks, Copilot, Environments, Codespaces, Pages (selected), Security, Advanced Security, Deploy keys, and Secrets and variables. The main content area is titled 'GitHub Pages' and includes the following sections:

- General:** A message stating 'GitHub Pages is designed to host your personal, organization, or project pages from a GitHub repository.' Below this, it says 'Your site is live at https://danielg77.github.io/Git_Practicas/' and 'Last deployed by DanielG77 2 minutes ago'. There are 'Visit site' and 'Unpublish site' buttons.
- Build and deployment:**
 - Source:** A dropdown menu set to 'Deploy from a branch'.
 - Branch:** A message stating 'Your GitHub Pages site is currently being built from the gh-pages branch. [Learn more about configuring the publishing source for your site.](#)' Below this are dropdowns for 'gh-pages' and '/ (root)', with a 'Save' button.
 - A link: 'Learn how to [add a Jekyll theme](#) to your site.'
 - A message: 'Your site was last deployed to the [github-pages](#) environment by the [pages build and deployment](#) workflow. [Learn more about deploying to GitHub Pages using custom workflows](#)'
- Custom domain:** A message stating 'Custom domains allow you to serve your site from a domain other than [danielg77.github.io](#). [Learn more about configuring custom domains.](#)' Below this is an input field, a 'Save' button, and a 'Remove' button.

En aquest punt es tracta d'una breu descripció de com s'ha portat a terme l'apartat de GitHub Pages



Documentació — Sistema de control de versions

Versió pública de la documentació (fills del projecte). Font: Pràctica — Sistema de control de versions. :contentReference[oaicite:1][index=1]
[Resum](#) [Procés](#) [Captures](#) [Informe \(PDF\)](#)

Resum del projecte

Aquí presentem una síntesi de l'organització i l'estat del projecte (sense incloure l'enunciat complet). Equip: **usuari1** (repo i proves), **usuari2** (contingut i atributs), **usuari3** (estils i release).

- **Branques principals:** main (producció), develop (desenvolupament)
- **Features:** feature/contingutHTML, feature/atributsHTML, feature/estilsCSS
- **Hotfix:** hotfix/milloresV_1_0
- **Release:** v1.0 (usuari3) i tags de patch si s'han creat

Procés realitzat (resum)

Treball seguint la metodologia **Git Flow**: features desenvolupades en rames feature/..., una release/1.0 etiquetada i un hotfix/milloresV_1_0 aplicat a main. Els commits segueixen el format suggerit a la pràctica (ex.: usuari2: feat(contingutHTML): ...).

Per al detall lineal del procés (comandes + captures), mira la secció *Captures* i baixa l'informe PDF si ho necessites.

Captures del procés (ordenades segons PDF)

Les imatges estan ordenades per nom i mostren el workflow: creació de repo, features, merges, release i hotfix.

