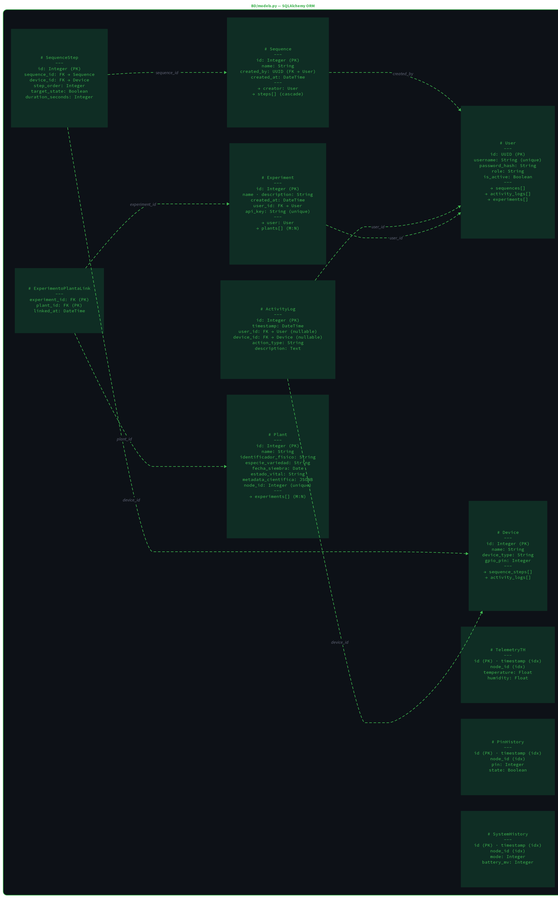
BDJmodels.py – SQLAlchemy ORM
SequenceStep
id: Integer (PK)
sequence_id: FK → Sequence
device_id: FK → Device
step_order: Integer
target_state: Boolean
duration_seconds: Integer
Sequence
id: Integer (PK)
name: String
created_by: UUID (FK → User)
created_at: DateTime
+ creator: User
+ steps[] (cascade)
# User
id: UUID (PK)
username: String (unique)
password_hash: String
role: String
is_active: Boolean
+ sequences[]
+ activity_logs[]
+ experiments[]
# Experiment
id: Integer (PK)
name: + description: String
start_date: DateTime
user_id: FK → User
api_key: String (unique)
+ user: User
+ plants[] (M:N)
# ExperimentPlantasLink
experiment_id: FK (PK)
plant_id: FK (PK)
linked_at: DateTime
ActivityLog
id: Integer (PK)
timestamp: DateTime
user_id: FK → User (nullable)
device_id: FK → Device (nullable)
action_type: String
description: Text
Plant
id: Integer (PK)
name: String
identificador_Fitchic: String
especie_variedad: String
fecha_siembra: Date
estado_vital: String
metadata_clientific: JSON
node_id: Integer (unique)
+ experiments[] (M:N)
# Device
id: Integer (PK)
name: String
device_type: String
gpio_pin: Integer
+ sequence_steps[]
+ activity_logs[]
# Telemetrytb
id (PK) · timestamp (idx)
node_id (idx)
temperature: Float
humidity: Float
PinHistory
id (PK) · timestamp (idx)
node_id (idx)
pin: Integer
state: Boolean
SystemHistory
id (PK) · timestamp (idx)
node_id (idx)
mode: Integer
battery_mv: Integer
sequence_id
created_by
experiment_id
user_id
plant_id
device_id
BDJschemas.py – Pydantic Validation
User
UserCreate
+ password: str
# UserBase
username · role · is_active
UserResponse
+ id: UUID
Device
DeviceCreate
DeviceBase
name · device_type · gpio_pin
DeviceResponse
+ id: int
Sequence
SequenceCreate
+ steps: List[SequenceStepBase]
# SequenceBase
name: str
SequenceResponse
+ id · created_by · created_at
+ steps: List[SequenceStepResponse]
# SequenceStepCreate
# SequenceStepBase
device_id · step_order
target_state · duration_seconds
SequenceStepResponse
+ id · sequence_id
Plant/Experiment/ABS
PlantCreate
PlantBase
name · identificador_Fitchic
especie_variedad · fecha_siembra
estado_vital · metadata_clientific
node_id
PlantResponse
+ id: int
# PlantUpdate
(all Optional)
ExperimentCreate
+ plant_ids: List[int]
# ExperimentBase
name · description
ExperimentResponse
+ id · created_at · user_id
+ api_key · plants[]
ActivityLog
ActivityLogCreate
+ user_id: UUID
# ActivityLogBase
action_type · description
device_id: Optional
ActivityLogResponse
+ id · timestamp · user_id
BDJRest & SessionSaber – Background Jobs
Scheduler
+tasksunsaber/main.py++
APScheduler (AsyncIO)
Hourly: sync_sensor_data_to_redis
30min: dummy_insert_test_data
3AM: enqueue_nightly_etl
Scheduler Tasks
++tasksunsaber/tasks.py++
sync_sensor_data_to_redis()
dummy_insert_test_data()
enqueue_nightly_etl()
RedisManager
ETL Worker
++Worker/tasks.py++ (RQ)
export_experiment_data(
experiments_id, ref_date, days
) → str (zip path)
Extract → Transform → Load
Pandas · Excel · Graphs
API Endpoints – FastAPI Routers (.py)
analysis_router
POST /api/analysis/generate
GET /api/analysis/status/{id}
GET /api/analysis/download/{f}
export_router
POST /api/export/plants
GET /api/export/status/{id}
GET /api/export/download/{id}
auth_router
POST /auth/register
POST /auth/login
GET /authme
discovery_router
GET /api/devices
history_router
GET /api/history/node/{id}
ws_router
ws /ws/{client_id}
sdk_router
GET /api/sdk/mesh/tokens/{id}
command_router
POST /api/command
time_router
CRUD /api/time/plantas
CRUD /api/time/experimentos
system_router
GET /api/system/status
GET /api/system/db-check
Core Infrastructure
Auth (functions)
++core/auth.py++
verify_password(plain, hashed)
get_password_hash(password)
create_access_token(data)
get_current_user(token, db)
get_current_active_user(user)
get_api_key_or_403(esp_id, key, db)
# ConnectionRegistry
++WS_Manager/manager.py++
active: Dict[str, WebSocket]
connect(ws, client_id)
disconnect(client_id)
is_connected(client_id)
send(client_id, payload)
broadcast(payload)
broadcast_except(exclude, payload)
# Dispatcher (functions)
++WS_Manager/dispatcher.py++
handle_gateway_message(data)
start_redis_listener()
start_activity_batch_flusher()
# RedisManager
++Core/redis.py++
redis: Optional[redis.Redis]
connect() · close()
get_client() → redis.Redis
set/get_device_state(device_id)
push_activity_event(event)
push_activity_batch(count)
publish_event(type, payload)
subscribe_events() → AsyncGen
esp/cmd
esp/ack
esp/data
esp/status
esp/ota
esp/log
esp/heartbeat
esp/cmd
esp/ack
esp/data
esp/status
esp/ota
esp/log
esp/heartbeat
esp/cmd
esp/ack
esp/data
esp/status
esp/ota
esp/log
esp/heartbeat