


Ejercicios Sección 2.5


2.5.1. Construir un AFD y el diagrama de transición asociado que acepte el lenguaje $(ab \cup aba)^*$. Compararlo con el AFN del Ejemplo 2.5.1.

2.5.2. Obtener un AFN (que no sea AFD) que acepte el lenguaje $ab^* \cup ab^*a$.

2.5.3. Usar la técnica precedente para determinar si las cadenas *babba* y *aabaaba* son aceptadas por el AFN del Ejemplo 2.5.1.


2.5.4. Sea M el AFN dado por $Q = \{q_0, q_1\}$, $\Sigma = \{a, b\}$, $s = q_0$, $F = \{q_1\}$ y Δ dada en la Figura 2.20. Determinar si a^2b , ba y b^2a están en $L(M)$. Dibujar el diagrama de transición para M .

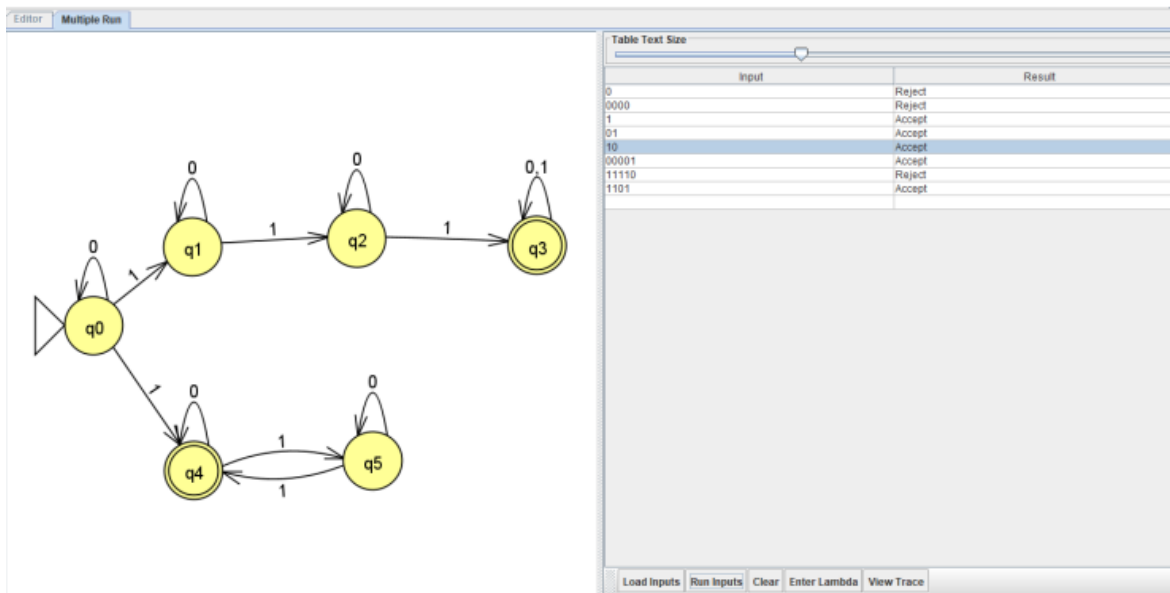

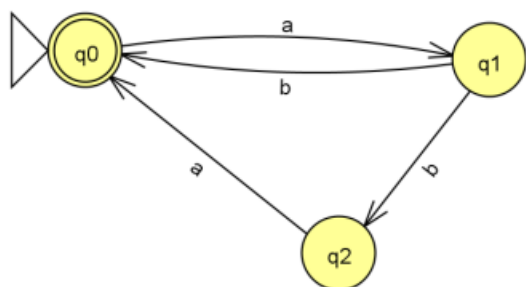

Input	Result
a	Reject
aaaab	Reject
ab	Accept
bbbaa	Reject
ababa	Accept
abba	Reject


Load Inputs Run Inputs Clear Enter Lambda View Trace

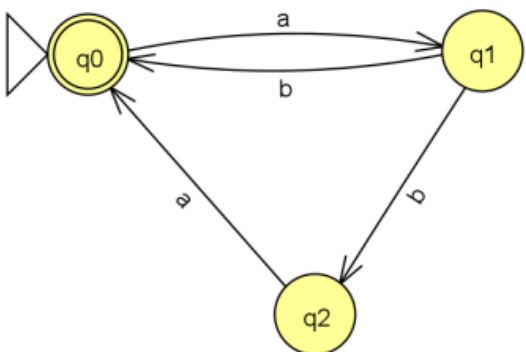

Input	Result
a	Reject
aaaab	Reject
ab	Accept
bbbaa	Reject
ababa	Accept
abba	Reject

Load Inputs Run Inputs Clear Enter Lambda View Trace

Input	Result
babba	Reject
aabaaba	Reject

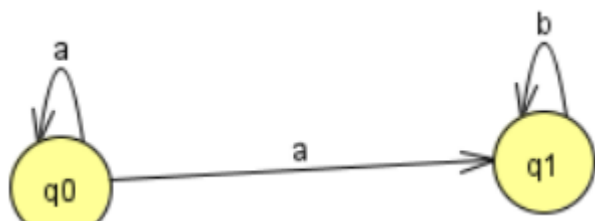

Expresión regular para identificar números telefónicos

```
[\\(]?[\\+]?(\\d{2}|\\d{3})[\\)]?[\\s]?((\\d{6}|\\d{8})|(\\d{3}[\\*\\.\\-\\s]){3}|(\\d{2}[\\*\\.\\-\\s]){4}|(\\d{4}[\\*\\.\\-\\s]){2})|\\d{8}|\\d{10}|\\d{12})
```

Expression JavaScript Flags

/[\\(]?[\\+]?(\\d{2}|\\d{3})[\\)]?[\\s]?((\\d{6}|\\d{8})|(\\d{3}[*\\.\\-\\s]){3}|(\\d{2}[*\\.\\-\\s]){4}|(\\d{4}[*\\.\\-\\s]){2})|\\d{8}|\\d{10}|\\d{12})/g

Text Tests NEW 4 matches (0.9ms)

RegExr was created by gskinner.com.

Edit the Expression & Text to see matches. Roll over matches or the expression for details. PCRE & JavaScript flavors of RegEx are supported. Validate your expression with Tests mode.

The side bar includes a Cheatsheet, full Reference, and Help. You can also Save & Share with the Community and view patterns you create or favorite in My Patterns.

Explore results with the Tools below. Replace & List output custom results. Details lists capture groups. Explain describes your expression in plain English. 42601085 +502 59108463 4260 1085 (502) 3952 4983