# Module2 - R Marddown Document 1

# Danielle Gauthier 2020-04-29

### This is a level 1 header

#### This is a level 2 header

#### This is a level 1 header

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

Here is a link to GOOGLE

Here is a word in **bold** and another word in **bold**.

Here is a word in *italics* and another word in *italics*.

When we compile our document, we are using the rmarkdown package.

Here are some example R commands:

```
2+2 mean(c(1,2,3,4,5))
```

Here is an example of a non-numbered list:

- Breakfast
  - food
    - \* eggs
    - \* toast
    - \* bacon
  - drink
    - \* apple juice
- Lunch
  - taco
- Dinner
  - baked chicken
  - broccoli
  - rice

Here is an example of a numbered list:

- 1. Breakfast
  - a. food
    - i. eggs
    - ii. toast
    - iii. bacon
  - b. drink
    - i. apple juice
- 2. Lunch
  - a. taco
- 3. Dinner
  - a. baked chicken
  - b. broccoli

c. rice

Here is an example of a blockquote:

This is a block quote. This paragraph has two lines.

- 1. This is a list inside a block quote.
- 2. Second item.

Here is an example of a nested blockquote:

This is a block quote. This paragraph has two lines.

This text is nested

Here is an example of code in a blockquote:

```
2+2 mean(c(1,2,3,4,5))
```


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

#### summary(cars)


```
##
        speed
                          dist
           : 4.0
                               2.00
##
                            :
    1st Qu.:12.0
                    1st Qu.: 26.00
##
    Median:15.0
                    Median: 36.00
            :15.4
                            : 42.98
##
    Mean
                    Mean
##
    3rd Qu.:19.0
                    3rd Qu.: 56.00
            :25.0
                            :120.00
##
    Max.
                    Max.
```

#### **Including Plots**

You can also embed plots, for example:

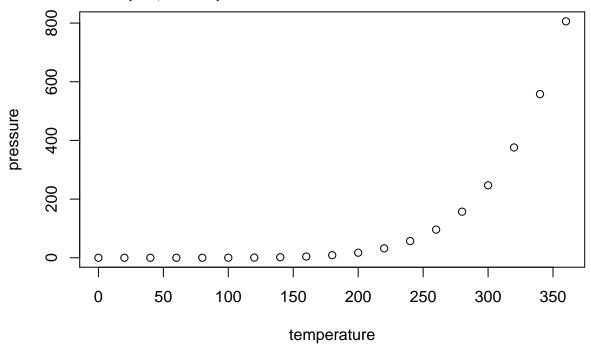

Note that the  $\mbox{echo}$  = FALSE parameter was added to the code chunk to prevent printing of the R code that generated the plot.

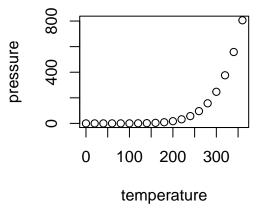

## Insert tables

knitr::kable(head(cars))

speed	dist
4	2
4	10
7	4
7	22
8	16
9	10