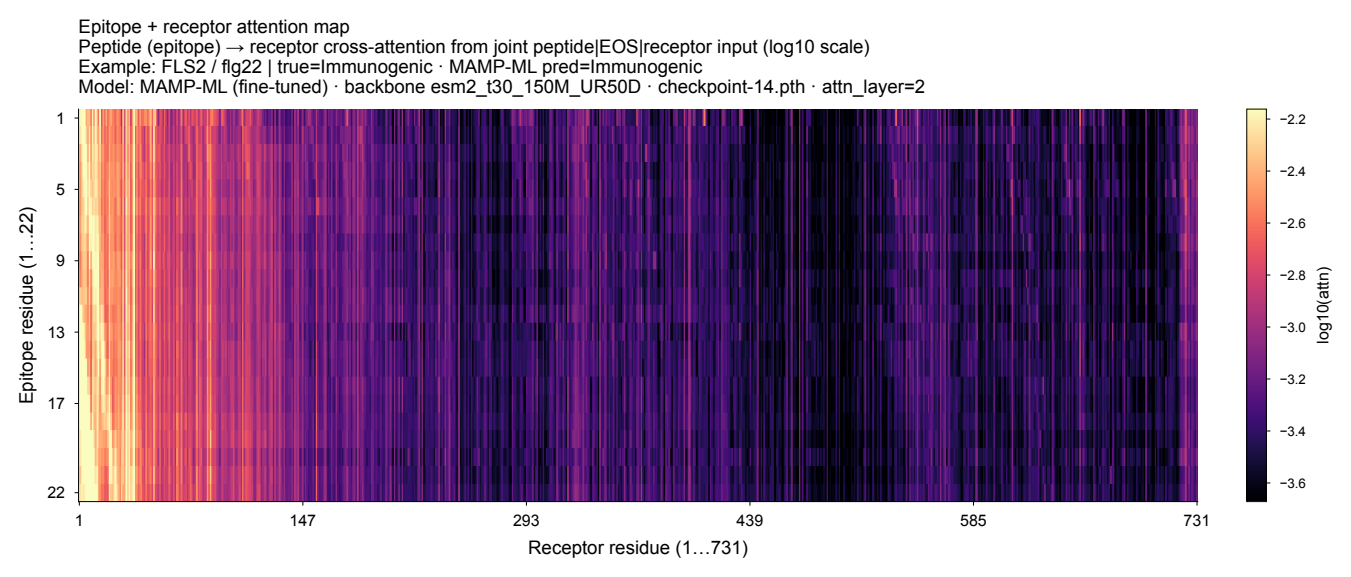

Epitope + receptor attention map
Peptide (epitope) → receptor cross-attention from joint peptide|EOS|receptor input (log10 scale)
Example: FLS2 / flg22 | true=Immunogenic · MAMP-ML pred=Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=2
Epitope residue (1…22)
1
5
9
13
17
22
1
147
293
439
585
731
Receptor residue (1…731)
log10(attn)
−2.2
−2.4
−2.6
−2.8
−3.0
−3.2
−3.4
−3.6