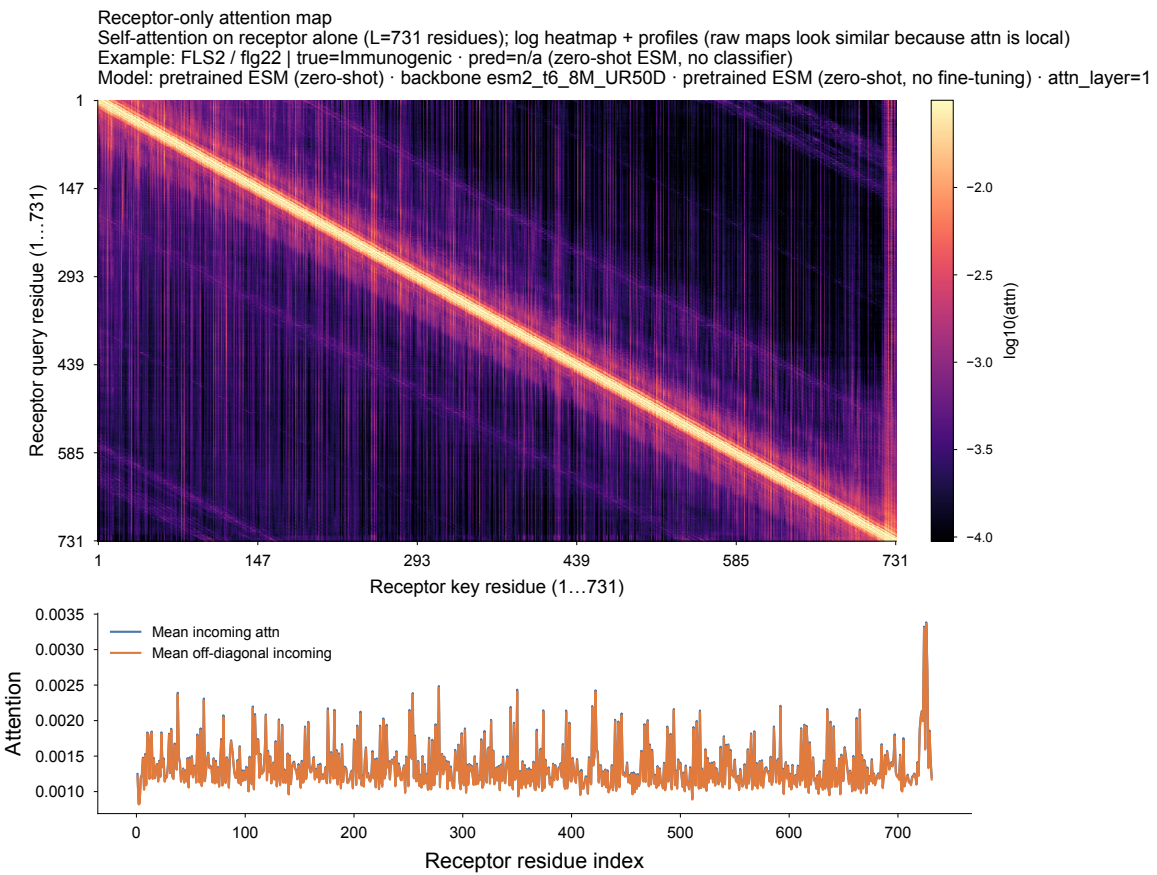

Receptor-only attention map
Self-attention on receptor alone (L=731 residues); log heatmap + profiles (raw maps look similar because attn is local)
Example: FLS2 / flg22 | true=Immunogenic · pred=n/a (zero-shot ESM, no classifier)
Model: pretrained ESM (zero-shot) · backbone esm2_t6_8M_UR50D · pretrained ESM (zero-shot, no fine-tuning) · attn_layer=1
Receptor query residue (1…731)
Receptor key residue (1…731)
log10(attn)
Mean incoming attn
Mean off-diagonal incoming
Attention
Receptor residue index