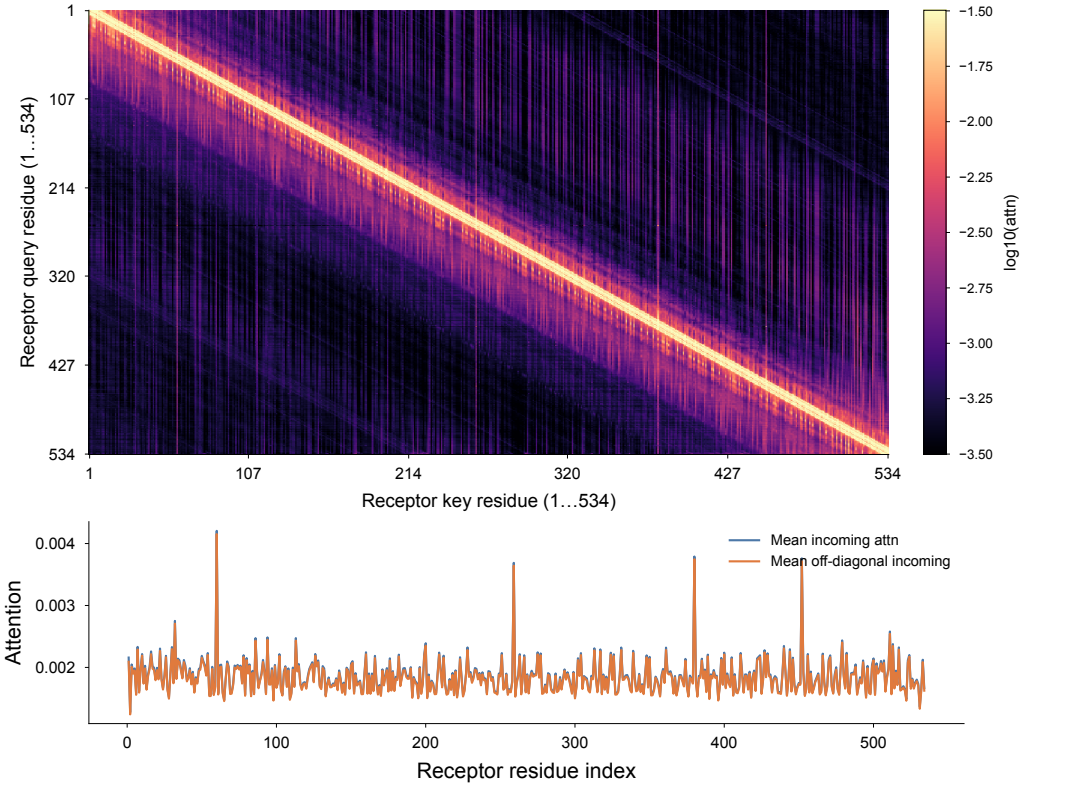

Receptor-only attention map
Self-attention on receptor alone (L=534 residues); log heatmap + profiles (raw maps look similar because attn is local)
Example: EFR / elf18 | true=Weakly Immunogenic · MAMP-ML pred=Weakly Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=1
Receptor query residue (1…534)
1
107
214
320
427
534
Receptor key residue (1…534)
log10(attn)
−1.50
−1.75
−2.00
−2.25
−2.50
−2.75
−3.00
−3.25
−3.50
Attention
0.004
0.003
0.002
Mean incoming attn
Mean off-diagonal incoming
0
100
200
300
400
500
Receptor residue index