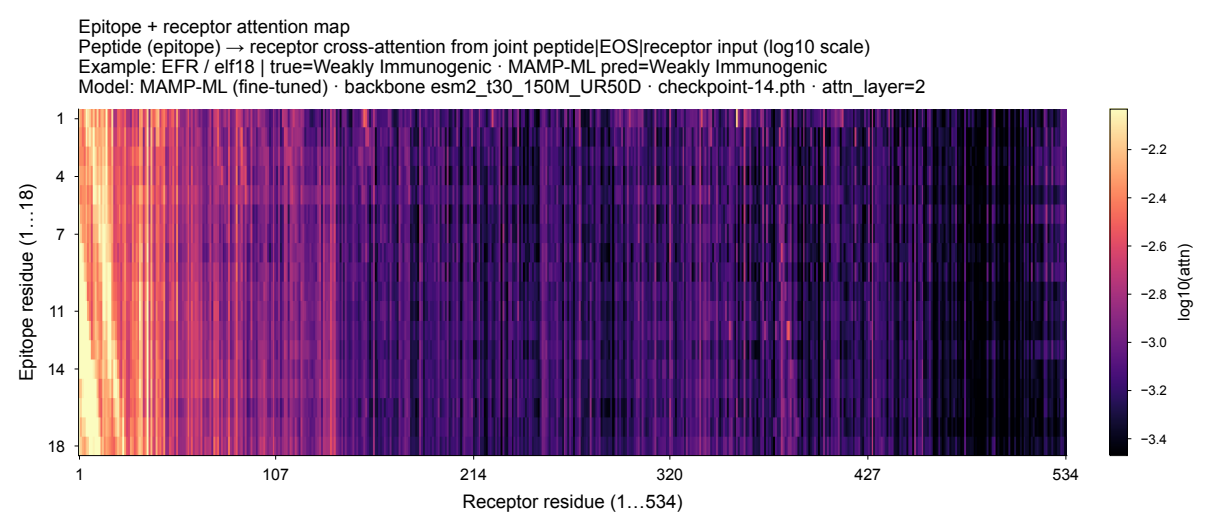
Epitope + receptor attention map
Peptide (epitope) → receptor cross-attention from joint peptide|EOS|receptor input (log10 scale)
Example: EFR / elf18 | true=Weakly Immunogenic · MAMP-ML pred=Weakly Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=2
Epitope residue (1…18)
1
4
7
11
14
18
Receptor residue (1…534)
1
107
214
320
427
534
log10(attn)
−2.2
−2.4
−2.6
−2.8
−3.0
−3.2
−3.4