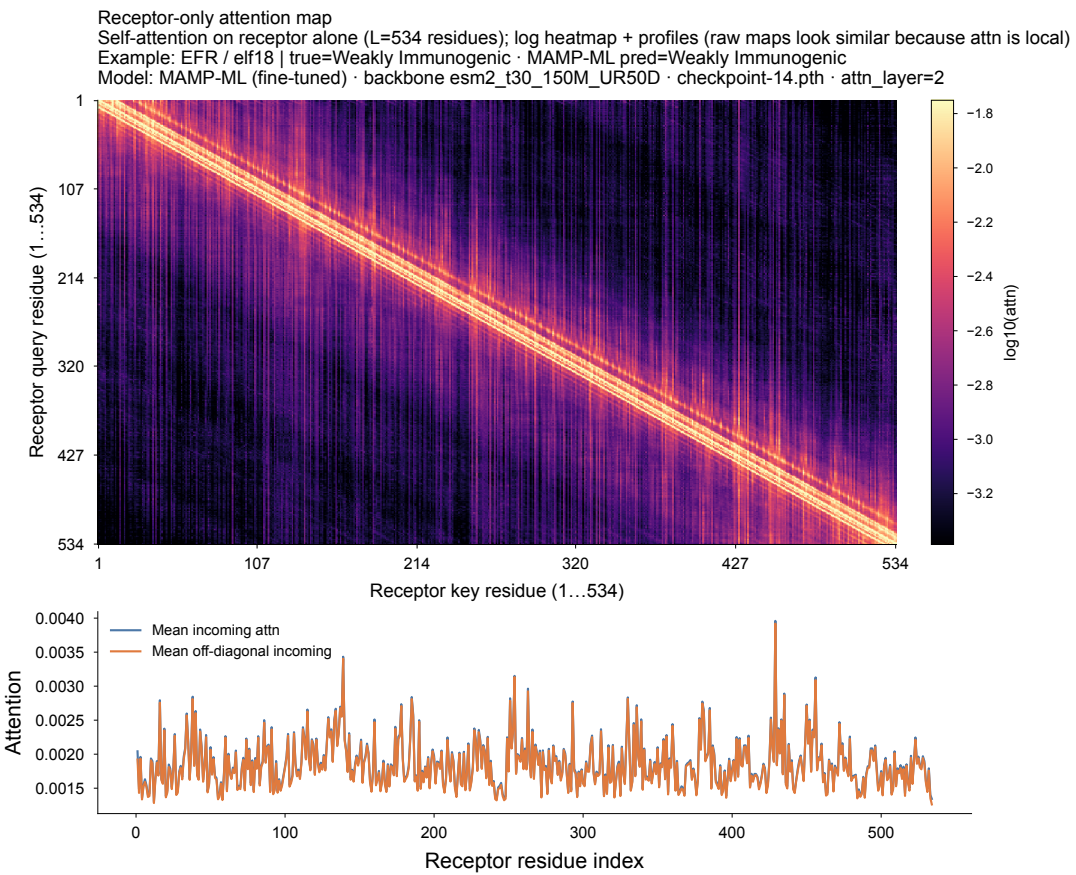

Receptor-only attention map
Self-attention on receptor alone (L=534 residues); log heatmap + profiles (raw maps look similar because attn is local)
Example: EFR / elf18 | true=Weakly Immunogenic · MAMP-ML pred=Weakly Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=2
Receptor query residue (1…534)
Receptor key residue (1…534)
log10(attn)
Mean incoming attn
Mean off-diagonal incoming
Attention
Receptor residue index