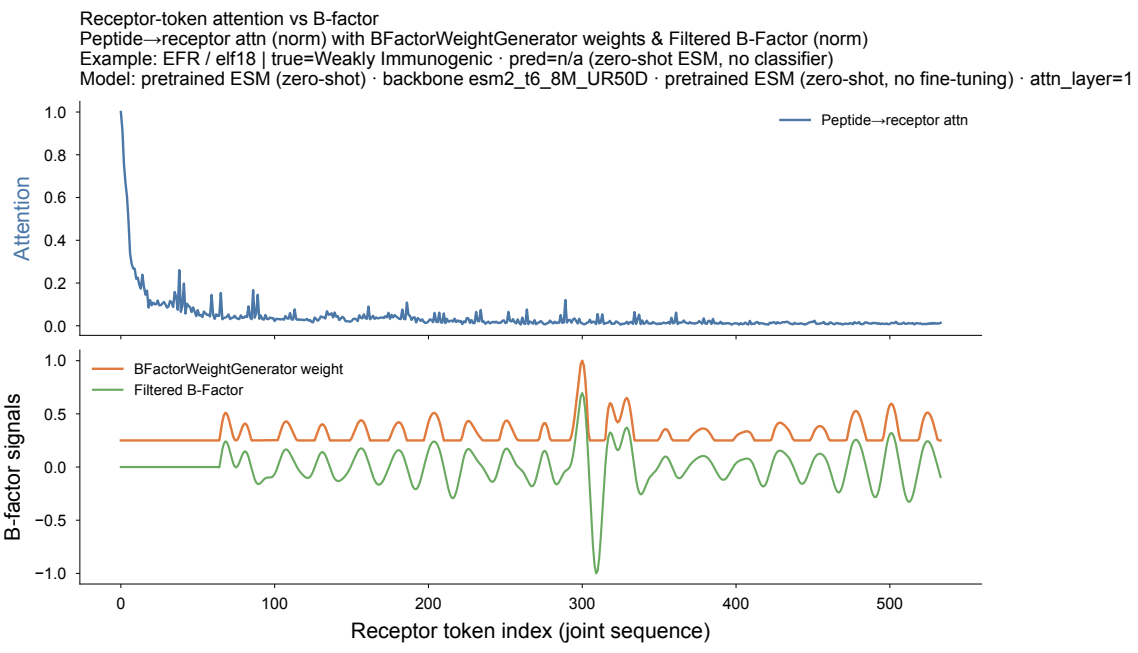
Receptor-token attention vs B-factor
Peptide→receptor attn (norm) with BFactorWeightGenerator weights & Filtered B-Factor (norm)
Example: EFR / elf18 | true=Weakly Immunogenic · pred=n/a (zero-shot ESM, no classifier)
Model: pretrained ESM (zero-shot) · backbone esm2_t6_8M_UR50D · pretrained ESM (zero-shot, no fine-tuning) · attn_layer=1
Peptide→receptor attn
Attention
1.0
0.8
0.6
0.4
0.2
0.0
BFactorWeightGenerator weight
Filtered B-Factor
B-factor signals
1.0
0.5
0.0
−0.5
−1.0
0
100
200
300
400
500
Receptor token index (joint sequence)