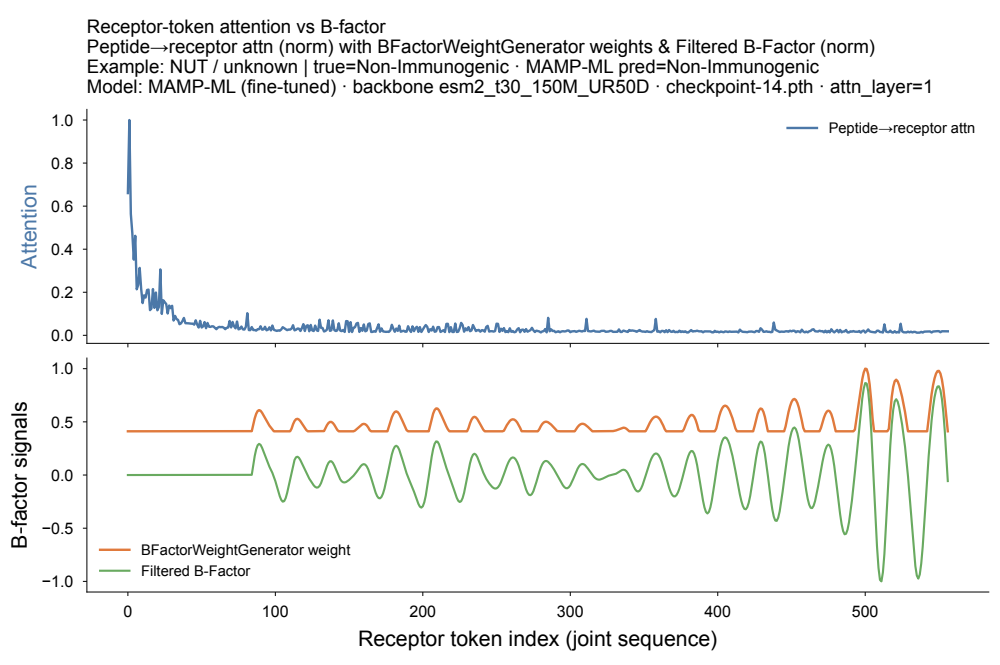
Receptor-token attention vs B-factor
Peptide→receptor attn (norm) with BFactorWeightGenerator weights & Filtered B-Factor (norm)
Example: NUT / unknown | true=Non-Immunogenic · MAMP-ML pred=Non-Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=1
Attention
Peptide→receptor attn
B-factor signals
BFactorWeightGenerator weight
Filtered B-Factor
Receptor token index (joint sequence)