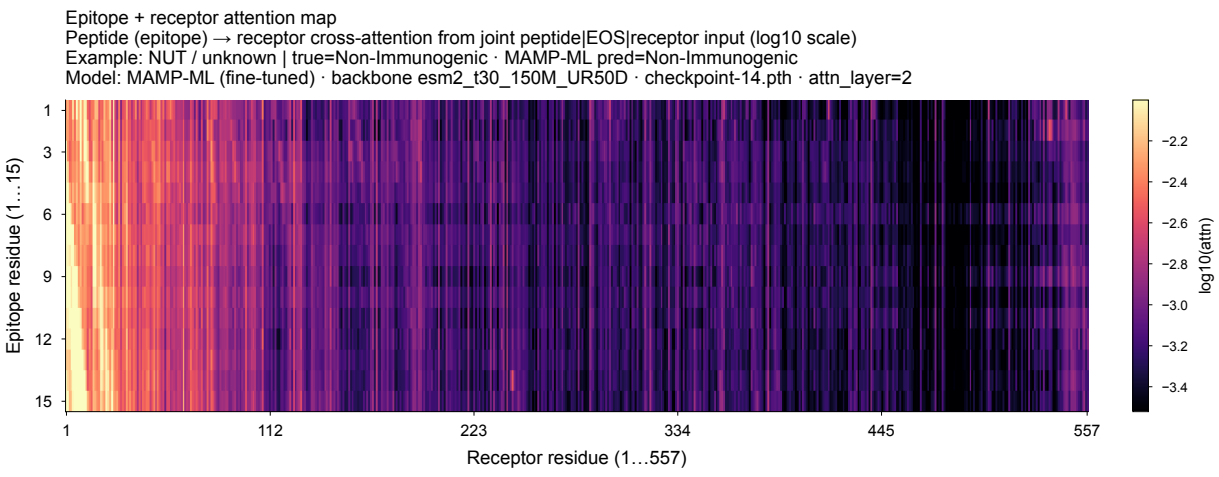
Epitope + receptor attention map
Peptide (epitope) → receptor cross-attention from joint peptide|EOS|receptor input (log10 scale)
Example: NUT / unknown | true=Non-Immunogenic · MAMP-ML pred=Non-Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=2
Epitope residue (1…15)
1
3
6
9
12
15
Receptor residue (1…557)
1
112
223
334
445
557
log10(attn)
−2.2
−2.4
−2.6
−2.8
−3.0
−3.2
−3.4