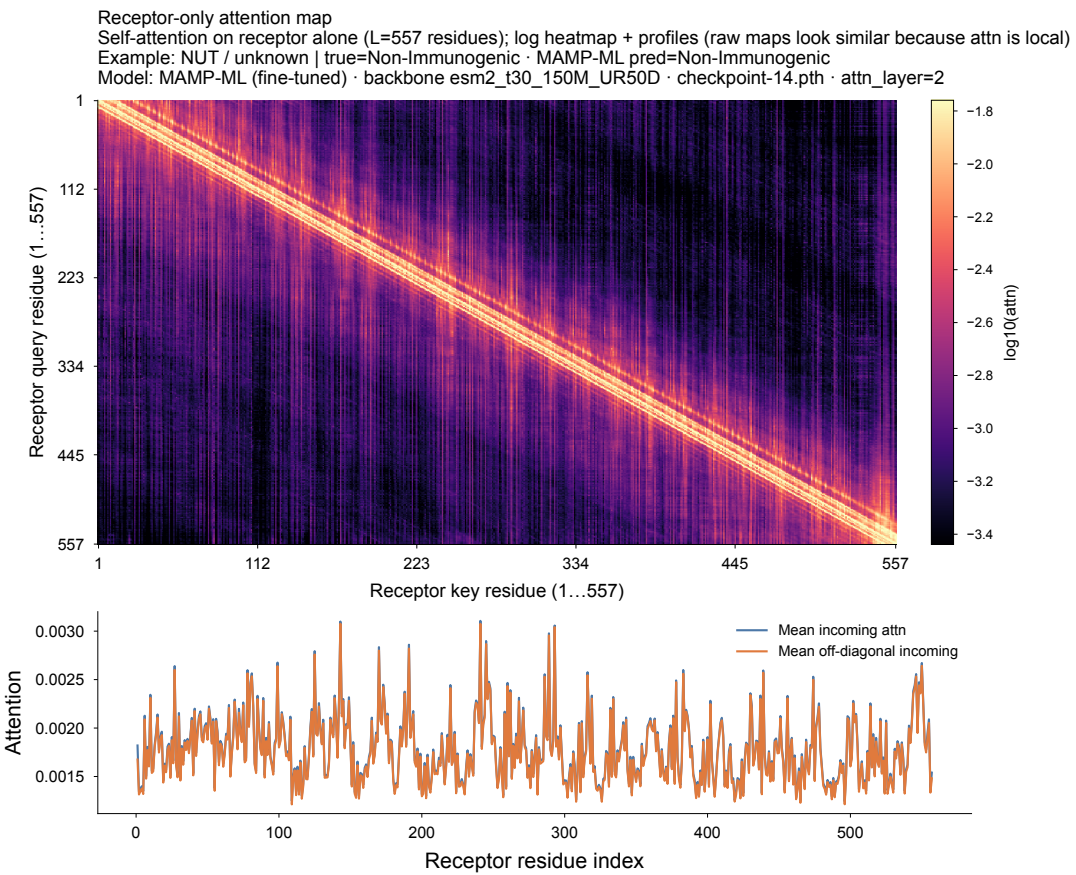

Receptor-only attention map
Self-attention on receptor alone (L=557 residues); log heatmap + profiles (raw maps look similar because attn is local)
Example: NUT / unknown | true=Non-Immunogenic · MAMP-ML pred=Non-Immunogenic
Model: MAMP-ML (fine-tuned) · backbone esm2_t30_150M_UR50D · checkpoint-14.pth · attn_layer=2
Receptor query residue (1…557)
Receptor key residue (1…557)
log10(attn)
Mean incoming attn
Mean off-diagonal incoming
Attention
Receptor residue index