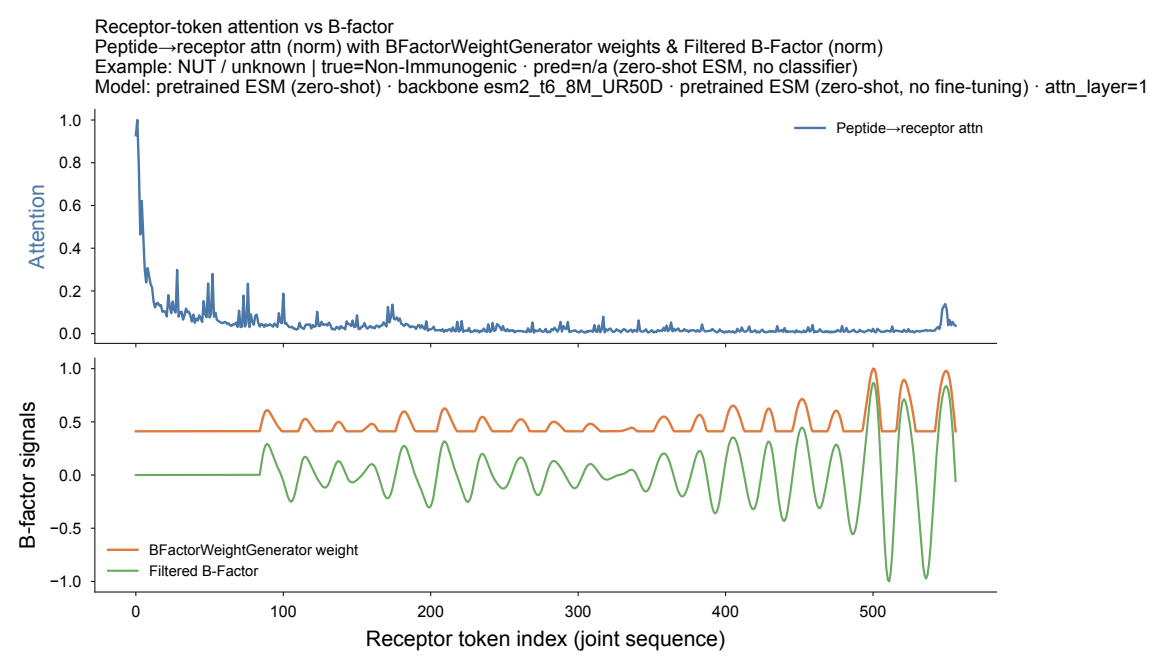
Receptor-token attention vs B-factor
Peptide→receptor attn (norm) with BFactorWeightGenerator weights & Filtered B-Factor (norm)
Example: NUT / unknown | true=Non-Immunogenic · pred=n/a (zero-shot ESM, no classifier)
Model: pretrained ESM (zero-shot) · backbone esm2_t6_8M_UR50D · pretrained ESM (zero-shot, no fine-tuning) · attn_layer=1
Attention
Peptide→receptor attn
B-factor signals
BFactorWeightGenerator weight
Filtered B-Factor
Receptor token index (joint sequence)