
Bilag 2

Mappe struktur

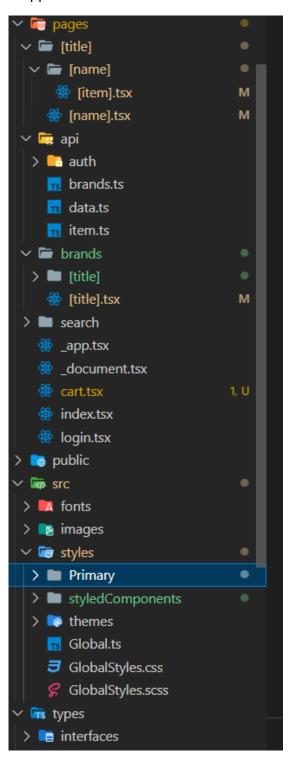

Eks på en af de 3 nextjs express handlers

```
import { NextApiRequest, NextApiResponse } from "next";
const handler = async (req: NextApiRequest, res: NextApiResponse) => {
 const { brand }: any = req.query;
 let capitalizedBrand: any = "";
 if (brand) {
 capitalizedBrand = brand.charAt(0).toUpperCase() + brand.slice(1);
 const brandsArray: any = [];
  let returnData: any = [];
   const response = await axios.get("https://api.mediehuset.net/stringsonline/brands");
   response.data.items.forEach((element: any) => {
     brandsArray.push({ title: element.title, id: element.id });
  for (let i = 0; i < brandsArray.length; i++) {</pre>
   if (brandsArray[i].title == capitalizedBrand) {
       const response = await axios.get(`https://api.mediehuset.net/stringsonline/brands/${brandsArray[i].id}`);
       returnData = response.data;
      } catch (error) {
      console.error(error);
 res.status(200).json({
  data: returnData,
export default handler;
```

Eks på zustand med typescript

```
ers > in useSearchApi.ts > ...
    import { create } from "zustand";

export interface StoreApi {
    searchApi: string;
    setSearchApi: (value: string) => void;
}

export const useSearchApi = create(
    (set): StoreApi => ({
        searchApi: "",
        setSearchApi: (value: string) => set((state: any) => ({ searchApi: value })),
    })
};

);
```