
How to set this bad boy up:

Step 1: Database Connection Pop-up:

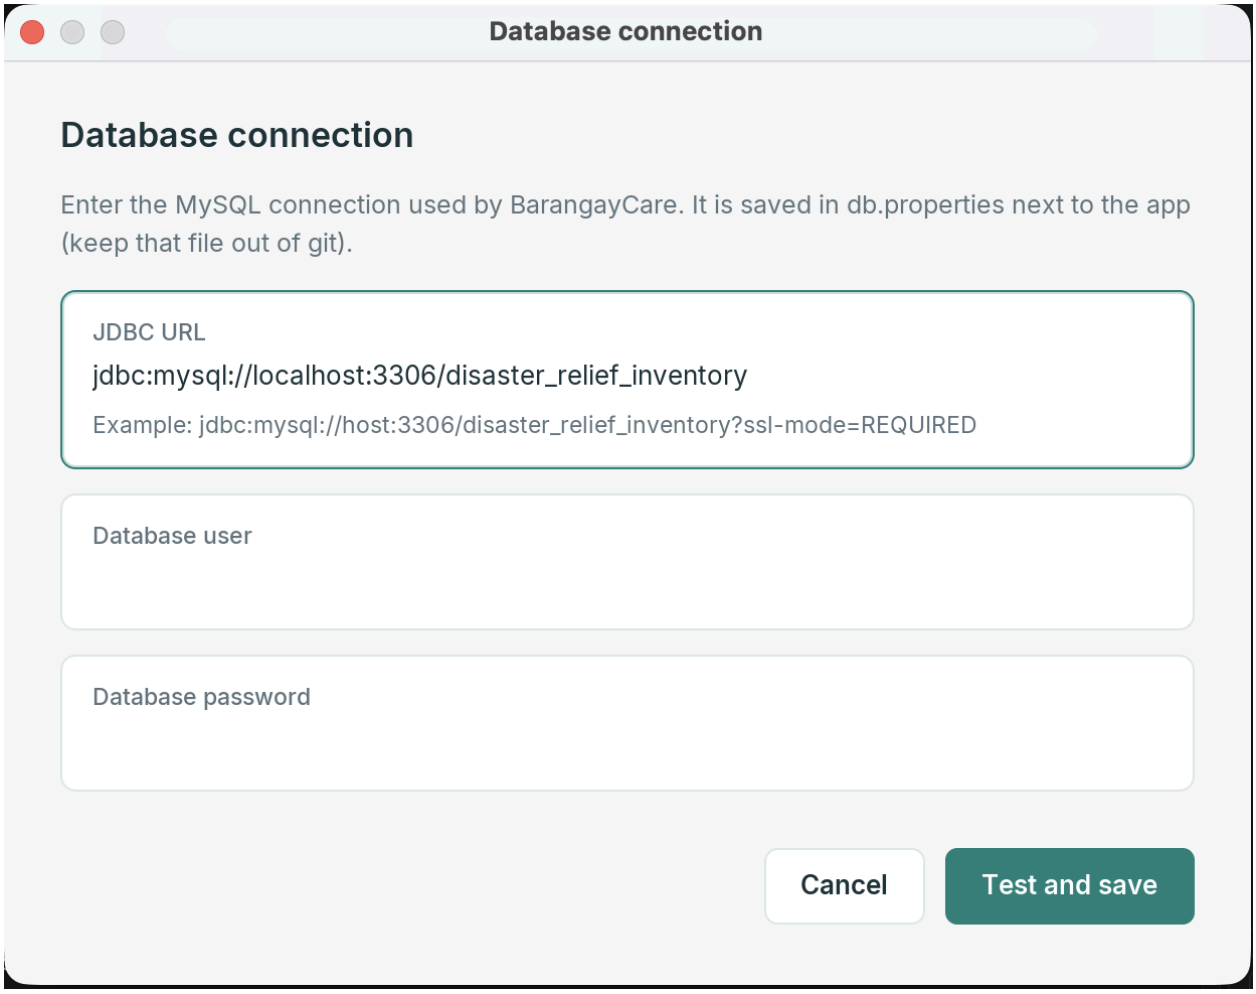

Using XAMPP actually makes this process easier because it includes a built-in visual database manager called **phpMyAdmin**.

Here is exactly how to set up your database and connect your code using XAMPP:

1. Start the MySQL Server


- Open the **XAMPP Control Panel**.
- Click the **Start** button next to **MySQL**.
- *Verification:* The word "MySQL" will turn green, and you should see it running on port `3306`.

2. Create the Database using phpMyAdmin

- In the XAMPP Control Panel, click the **Admin** button next to MySQL (or open your web browser and go to `http://localhost/phpmyadmin`).
- In the top menu bar, click on **Databases**.
- Under "Create database", type `disaster_relief_inventory`.
- Click **Create**.

3. Run Your Schema Script

- On the left sidebar of phpMyAdmin, click on your newly created `disaster_relief_inventory` database.
- Click the **SQL** tab in the top menu.
- Paste your entire long schema script (from your first message) into the text box.
- Click the **Go** button at the bottom right. This will create all your tables, views, and triggers.

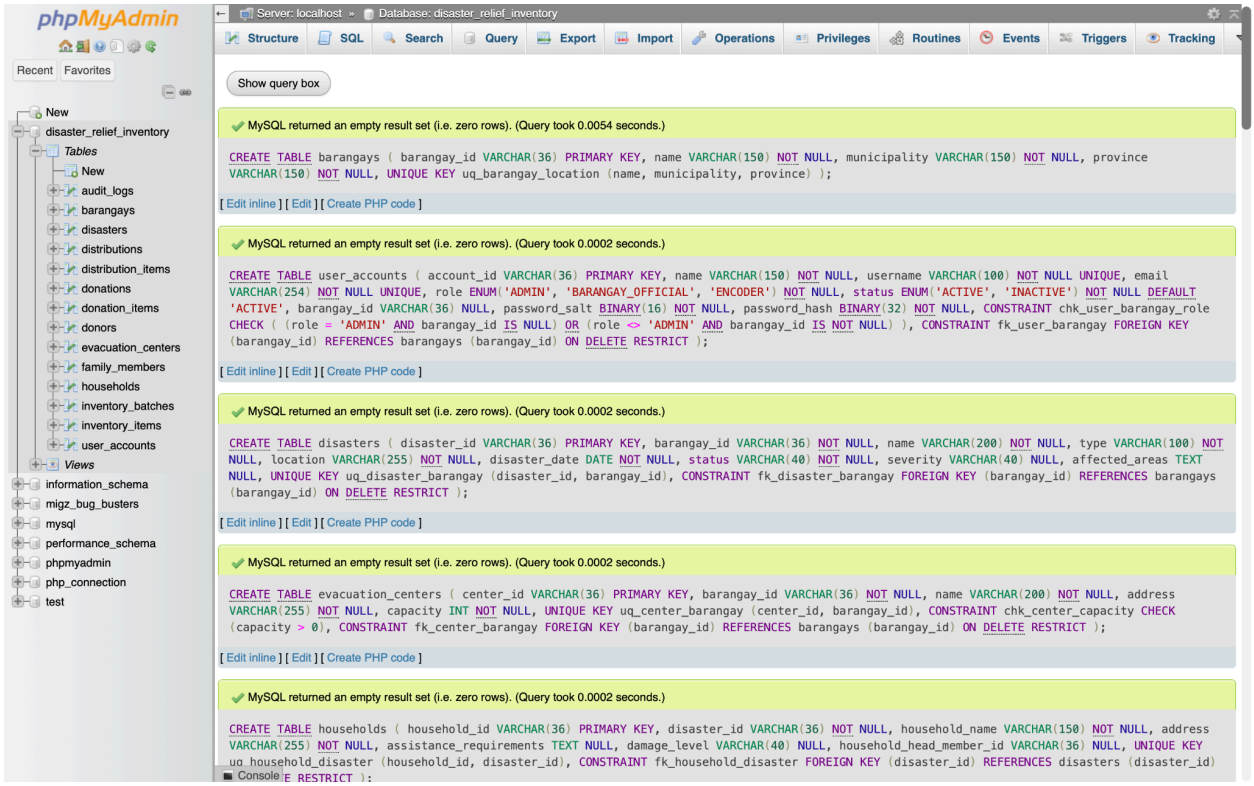
phpMyAdmin
Recent
Favorites
New
disaster_relief_inventory
Tables
New
audit_logs
barangays
disasters
distributions
distribution_items
donations
donation_items
donors
evacuation_centers
family_members
households
inventory_batches
inventory_items
user_accounts
Views
information_schema
migz_bug_busters
mysql
performance_schema
phpmyadmin
php_connection
test
Server: localhost » Database: disaster_relief_inventory
Structure
SQL
Search
Query
Export
Import
Operations
Privileges
Routines
Events
Triggers
Tracking
Show query box
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0054 seconds.)
CREATE TABLE barangays (barangay_id VARCHAR(36) PRIMARY KEY, name VARCHAR(150) NOT NULL, municipality VARCHAR(150) NOT NULL, province VARCHAR(150) NOT NULL, UNIQUE KEY uq_barangay_location (name, municipality, province));
[Edit inline] [Edit] [Create PHP code]
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE user_accounts (account_id VARCHAR(36) PRIMARY KEY, name VARCHAR(150) NOT NULL, username VARCHAR(100) NOT NULL UNIQUE, email VARCHAR(254) NOT NULL UNIQUE, role ENUM('ADMIN', 'BARANGAY_OFFICIAL', 'ENCODER') NOT NULL, status ENUM('ACTIVE', 'INACTIVE') NOT NULL DEFAULT 'ACTIVE', barangay_id VARCHAR(36) NULL, password_salt BINARY(16) NOT NULL, password_hash BINARY(32) NOT NULL, CONSTRAINT chk_user_barangay_role CHECK ((role = 'ADMIN' AND barangay_id IS NULL) OR (role <> 'ADMIN' AND barangay_id IS NOT NULL)), CONSTRAINT fk_user_barangay FOREIGN KEY (barangay_id) REFERENCES barangays (barangay_id) ON DELETE RESTRICT);
[Edit inline] [Edit] [Create PHP code]
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE disasters (disaster_id VARCHAR(36) PRIMARY KEY, barangay_id VARCHAR(36) NOT NULL, name VARCHAR(200) NOT NULL, type VARCHAR(100) NOT NULL, location VARCHAR(255) NOT NULL, disaster_date DATE NOT NULL, status VARCHAR(40) NOT NULL, severity VARCHAR(40) NULL, affected_areas TEXT NULL, UNIQUE KEY uq_disaster_barangay (disaster_id, barangay_id), CONSTRAINT fk_disaster_barangay FOREIGN KEY (barangay_id) REFERENCES barangays (barangay_id) ON DELETE RESTRICT);
[Edit inline] [Edit] [Create PHP code]
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE evacuation_centers (center_id VARCHAR(36) PRIMARY KEY, barangay_id VARCHAR(36) NOT NULL, name VARCHAR(200) NOT NULL, address VARCHAR(255) NOT NULL, capacity INT NOT NULL, UNIQUE KEY uq_center_barangay (center_id, barangay_id), CONSTRAINT chk_center_capacity CHECK (capacity > 0), CONSTRAINT fk_center_barangay FOREIGN KEY (barangay_id) REFERENCES barangays (barangay_id) ON DELETE RESTRICT);
[Edit inline] [Edit] [Create PHP code]
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE households (household_id VARCHAR(36) PRIMARY KEY, disaster_id VARCHAR(36) NOT NULL, household_name VARCHAR(150) NOT NULL, address VARCHAR(255) NOT NULL, assistance_requirements TEXT NULL, damage_level VARCHAR(40) NULL, household_head_member_id VARCHAR(36) NULL, UNIQUE KEY uq_household_disaster (household_id, disaster_id), CONSTRAINT fk_household_disaster FOREIGN KEY (disaster_id) REFERENCES disasters (disaster_id)
E RESTRICT);
Console

Step 3: YOO IT STILL FUCKING NEED A PASSWORD!?


If the error says something like **"using password: NO"**, it means your Java code requires a password to be there and won't accept a blank one.

The easiest way to fix this is to go into XAMPP and set the MySQL password to match what your file originally had (`brgy.care_db`).

Here is how to do that in a few clicks:

1. Open your web browser and go to `http://localhost/phpmyadmin`.
2. In the top menu, click on **User accounts**.
3. Look for the row where the **User name** is `root` and the **Host name** is `localhost`. Click **Edit privileges** on that row.
4. At the top of the next page, click **Change password**.

Step 3: BRUHHH I CAN'T FUCKING ACCESS THE LOCAL HOST U FUCKING SHIT!!!???

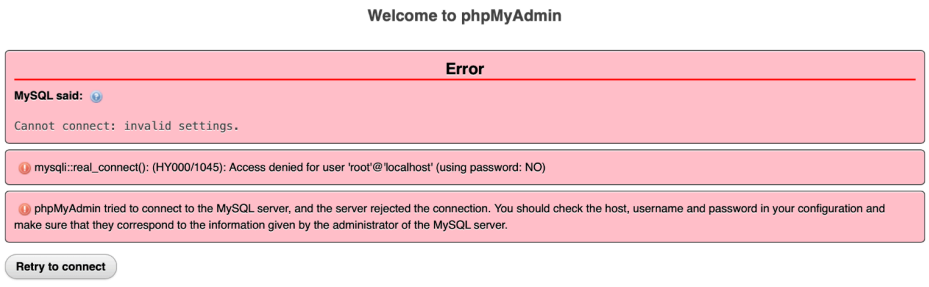

The error shown in "Screenshot 2026-10-22 at 7.39.14 PM.png" happened because you successfully changed the MySQL password, but phpMyAdmin's internal configuration file still thinks the password is blank (indicated by the `using password: NO` message). Since phpMyAdmin is just an application that connects to the MySQL server, changing the password locked it out.


PNG+ 2

To restore access to phpMyAdmin, you must update its configuration file in your XAMPP directory:

1. Open your XAMPP installation folder (typically `C:\xampp` on Windows or `/Applications/XAMPP` on Mac).
2. Open the **phpMyAdmin** folder.
3. Locate the file named **`config.inc.php`** and open it in a text editor (like Notepad or VS Code).
4. Find the following line of code: $cfg['Servers'][i]['password'] = '';
5. Update it to include the password you just created: $cfg['Servers'][i]['password'] = 'brgy.care_db';
6. Save and close the file.

Refresh the phpMyAdmin page in your browser. It will read the updated file, log in with the correct password, and grant you access again. Your Java application should now also connect successfully using your updated `db.properties` file.

Step 4: Optional for a RETARD LIKE YOU WHO CAN’T REMEMBER SHIT!!!! ALSO FUCK YOU DO THIS ON YOUR OWN!!!:

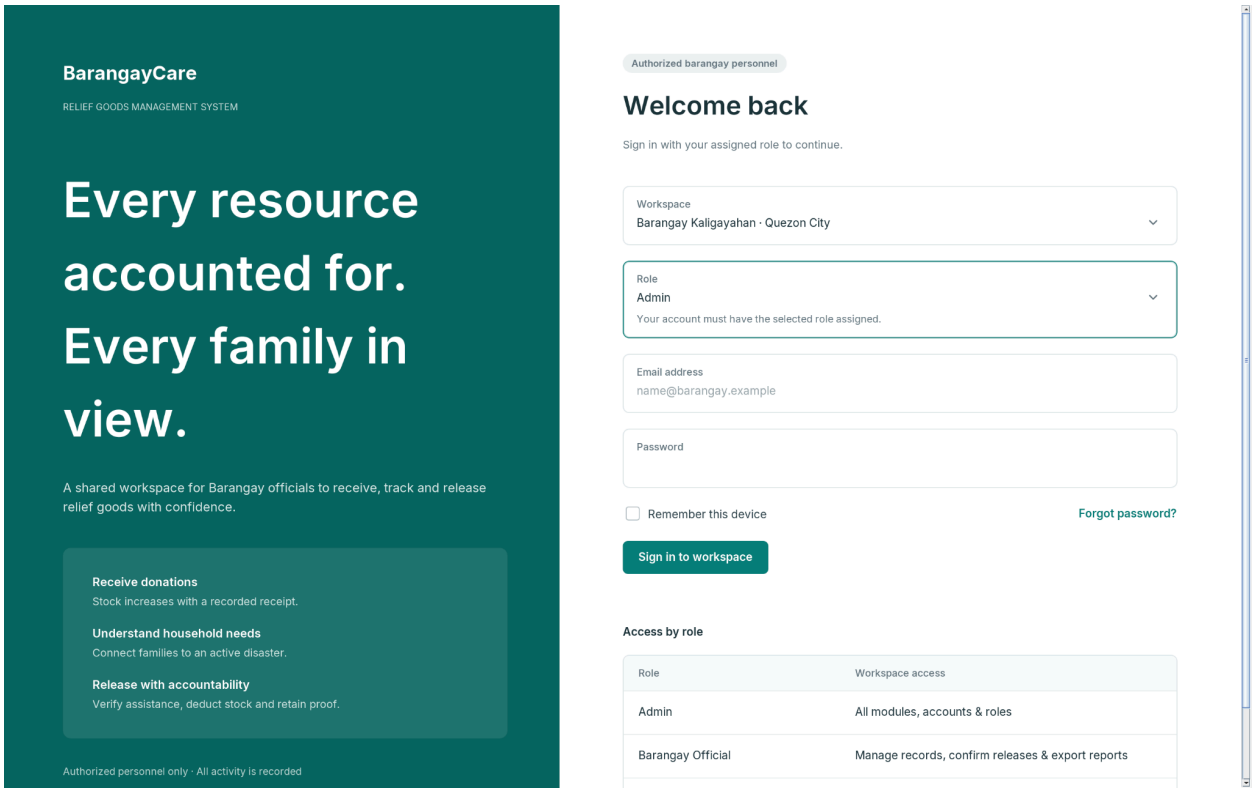

However, because you just created the database and ran the empty schema script, your `user_accounts` table in phpMyAdmin is currently completely empty. This means no email or password will work yet because no users exist in the system.

Since the login screen is for "Authorized personnel only" and does not have a "Sign Up" or "Register" button, you cannot create an account from this interface.To access the system, you need to populate the database with a default admin account. Here is how you can do that:

1. Look for a Seed Script Check your project files for a file named something like `seed.sql`, `data.sql`, or `init.sql`. Developers usually include this file to automatically insert the first workspace (like "Barangay Kaligayahan") and the first default Admin account. If you find it, run this script in the phpMyAdmin SQL tab just like you did with your schema.

2. Check the Project Documentation (Readme) If you are running someone else's project (like from GitHub), check the `README.md` file. The developer will usually provide the default admin email and password that you are supposed to use to log in for the first time.

3. Password Hashing Requirement You cannot simply write a basic `INSERT INTO user_accounts` SQL command yourself because the schema you shared earlier requires the password to be securely encrypted (`password_salt BINARY(16)` and `password_hash BINARY(32)`). If you cannot find a `seed.sql` file or default credentials in the documentation, look for a specific setup Java file in your project that generates the first admin user.