1.

SQLQuery1.sq...\danii (54))*

```sql
CREATE TABLE Authors (
    AuthorID INT IDENTITY(1,1) PRIMARY KEY,
    FirstName VARCHAR(100) NOT NULL,
    LastName VARCHAR(100) NOT NULL
);

CREATE TABLE Categories (
    CategoryID INT IDENTITY(1,1) PRIMARY KEY,
    CategoryName VARCHAR(100) NOT NULL UNIQUE
);

CREATE TABLE Books (
    BookID INT IDENTITY(1,1) PRIMARY KEY,
    Title VARCHAR(200) NOT NULL,
    AuthorID INT NOT NULL,
    Price DECIMAL(10, 2) NOT NULL CHECK (Price > 0),
    PublishedYear INT CHECK (PublishedYear > 0 AND PublishedYear <= YEAR(GETDATE())),
    CONSTRAINT FK_Books_Authors FOREIGN KEY (AuthorID) REFERENCES Authors(AuthorID)
);

CREATE TABLE BookCategories (
    BookID INT NOT NULL,
    CategoryID INT NOT NULL,
    PRIMARY KEY (BookID, CategoryID),
    CONSTRAINT FK_BookCategories_Books FOREIGN KEY (BookID) REFERENCES Books(BookID),
    CONSTRAINT FK_BookCategories_Categories FOREIGN KEY (CategoryID) REFERENCES Categories(CategoryID)
);

CREATE TABLE Clients (
    ClientID INT IDENTITY(1,1) PRIMARY KEY,
    FirstName NVARCHAR(100) NOT NULL,
    LastName NVARCHAR(100) NOT NULL,
    Email NVARCHAR(150) NOT NULL UNIQUE
);

CREATE TABLE Orders (
    OrderID INT IDENTITY(1,1) PRIMARY KEY,
    ClientID INT NOT NULL,
    OrderDate DATETIME NOT NULL DEFAULT GETDATE(),
    Status VARCHAR(50) NOT NULL DEFAULT 'New',
    CONSTRAINT FK_Orders_Clients FOREIGN KEY (ClientID) REFERENCES Clients(ClientID)
);

CREATE TABLE OrderDetails (
    OrderID INT NOT NULL,
    BookID INT NOT NULL,
    Quantity INT NOT NULL CHECK (Quantity > 0),
    UnitPrice DECIMAL(10, 2) NOT NULL CHECK (UnitPrice > 0),
    PRIMARY KEY (OrderID, BookID),
    CONSTRAINT FK_OrderDetails_Orders FOREIGN KEY (OrderID) REFERENCES Orders(OrderID),
    CONSTRAINT FK_OrderDetails_Books FOREIGN KEY (BookID) REFERENCES Books(BookID)
);
```

2.

SQLQuery1.sq...\danii (57))*

```sql
INSERT INTO Authors (FirstName, LastName) VALUES
('George', 'Orwell'),
('J.K.', 'Rowling'),
('Isaac', 'Asimov'),
('Ray', 'Bradbury');

INSERT INTO Categories (CategoryName) VALUES
('Science Fiction'),
('Dystopia'),
('Fantasy'),
('Classic');

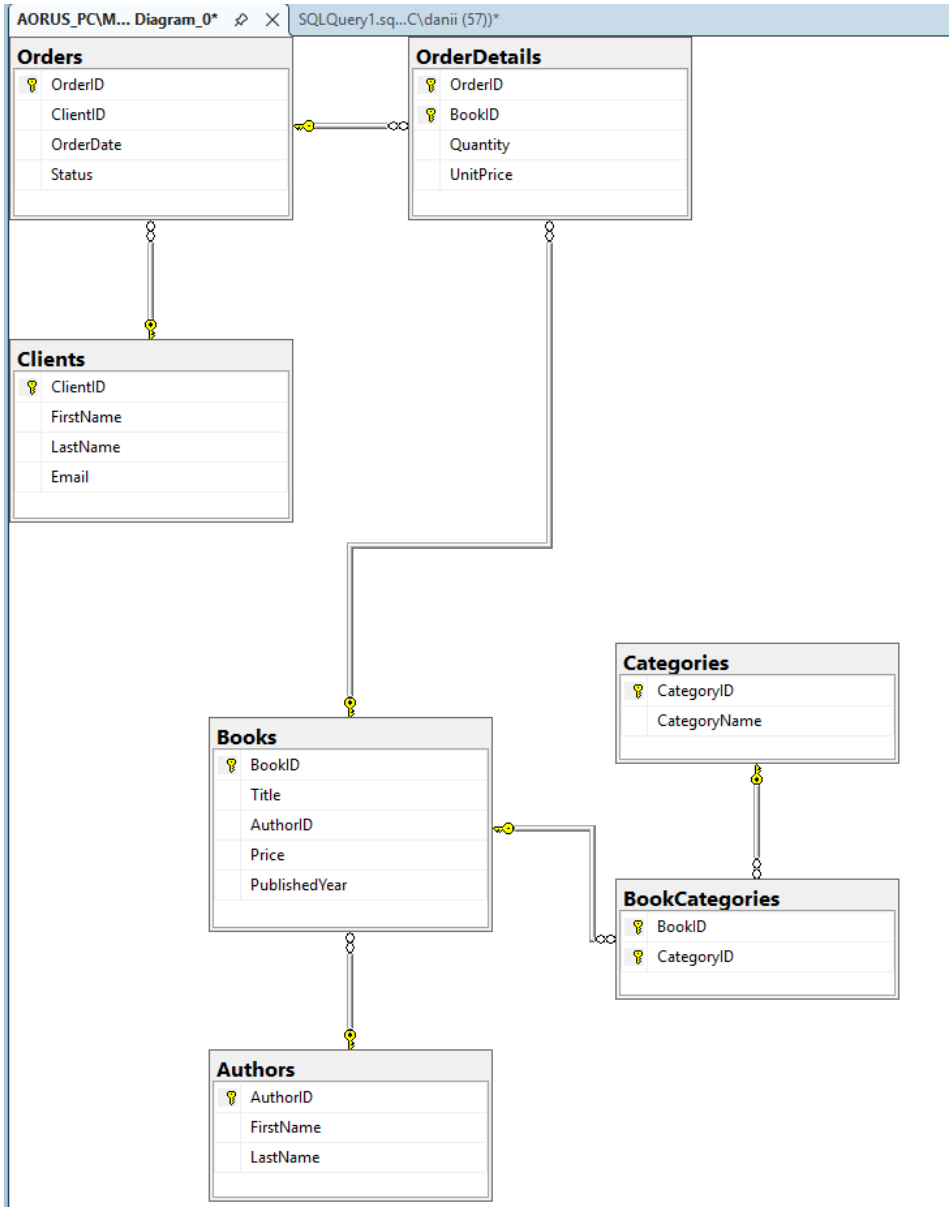
INSERT INTO Books (Title, AuthorID, Price, PublishedYear) VALUES
('1984', 1, 15.99, 1949),
('Animal Farm', 1, 9.99, 1945),
('Harry Potter and the Sorcerer''s Stone', 2, 25.50, 1997),
('Foundation', 3, 12.00, 1951),
('I, Robot', 3, 14.50, 1950),
('Fahrenheit 451', 4, 11.20, 1953);

INSERT INTO BookCategories (BookID, CategoryID) VALUES
(1, 1), (1, 2), (1, 4),
(2, 2), (2, 4),
(3, 3),
(4, 1), (4, 4),
(5, 1),
(6, 1), (6, 2), (6, 4);

INSERT INTO Clients (FirstName, LastName, Email) VALUES
('Alice', 'Smith', 'alice@example.com'),
('Bob', 'Johnson', 'bob@example.com'),
('Charlie', 'Brown', 'charlie@example.com'),
('Diana', 'Prince', 'diana@example.com'),
('Eve', 'Adams', 'eve@example.com');

INSERT INTO Orders (ClientID, OrderDate, Status) VALUES
(1, '2026-09-10 10:00:00', 'Completed'),
(2, '2026-09-11 11:30:00', 'Completed'),
(1, '2026-09-12 14:15:00', 'Shipped'),
(3, '2026-09-13 09:45:00', 'Completed'),
(4, '2026-09-14 16:20:00', 'Processing'),
(5, '2026-09-15 12:10:00', 'Completed'),
(2, '2026-09-16 08:05:00', 'New'),
(3, '2026-09-16 19:30:00', 'New');

INSERT INTO OrderDetails (OrderID, BookID, Quantity, UnitPrice) VALUES
(1, 1, 1, 15.99),
(1, 2, 2, 9.99),
(2, 3, 1, 25.50),
(3, 4, 1, 12.00),
(3, 5, 1, 14.50),
(3, 6, 1, 11.20),
(4, 1, 3, 15.99),
(5, 2, 1, 9.99),
(6, 3, 2, 25.50),
(6, 4, 1, 12.00),
(7, 5, 1, 14.50),
(8, 6, 5, 11.20);
```


AORUS_PC\M... Diagram_0*
SQLQuery1.sq...C\danii (57))*
Orders
OrderID
ClientID
OrderDate
Status
OrderDetails
OrderID
BookID
Quantity
UnitPrice
Clients
ClientID
FirstName
LastName
Email
Categories
CategoryID
CategoryName
Books
BookID
Title
AuthorID
Price
PublishedYear
BookCategories
BookID
CategoryID
Authors
AuthorID
FirstName
LastName