

# Chapel: Locales

## (Controlling Locality and Affinity)

# The Locale Type

## Definition:

- Abstract unit of target architecture
- Supports reasoning about locality
- Capable of running tasks and storing variables
  - i.e., has processors and memory

## Properties:

- a locale's tasks have ~uniform access to local vars
- Other locale's vars are accessible, but at a price

## In practice:

- Typically a compute node (multicore processor or SMP)



# "Hello World" in Chapel: a Multi-Locale Version

- Multi-locale Hello World

```
coforall loc in Locales do
  on loc do
    writeln("Hello, world! ",
           "from node ", loc.id, " of ", numLocales);
```



# Locales and Program Startup

- Specify # of locales when running Chapel programs

```
% a.out --numLocales=8
```

```
% a.out -nl 8
```

- Chapel provides built-in locale variables

```
config const numLocales: int = ...;
const LocaleSpace = {0..numLocales-1};
const Locales: [LocaleSpace] locale = ...;
```

*numLocales:* 8

*LocaleSpace:*



*Locales:*



- main() begins as a single task on locale #0 (`Locales[0]`)

# Rearranging Locales

Create locale views with standard array operations:

```
var TaskALocs = Locales[0..1];
var TaskBLocs = Locales[2..];

var Grid2D = Locales.reshape({1..2, 1..4});
```

**Locales:**

L0	L1	L2	L3	L4	L5	L6	L7
----	----	----	----	----	----	----	----

**TaskALocs:**

L0	L1
----	----

**TaskBLocs:**

L2	L3	L4	L5	L6	L7
----	----	----	----	----	----

**Grid2D:**

L0	L1	L2	L3
L4	L5	L6	L7

# Locale Methods

- `proc locale.id: int { ... }`

Returns locale's index in LocaleSpace

- `proc locale.name: string { ... }`

Returns name of locale, if available (like `uname -a`)

- `proc locale.numCores: int { ... }`

Returns number of processor cores available to locale

- `proc locale.physicalMemory(...) { ... }`

Returns physical memory available to user programs on locale

Example

```
const totalPhysicalMemory =  
    + reduce Llocales.physicalMemory();
```

# The On Statement

- Syntax

```
on-stmt:
  on expr do stmt
  on expr { stmts }
```

- Semantics

- Executes *stmt(s)* on the locale that stores *expr*

- Example

```
writeln("start executing on locale 0");
on Locales[1] do
  writeln("now we're on locale 1");
writeln("back on locale 0 again");
```

# Locality and Parallelism are Orthogonal

- On-clauses do not introduce any parallelism

```
writeln("start executing on locale 0");
on Locales[1] do
    writeln("now we're on locale 1");
writeln("back on locale 0 again");
```

- But can be combined with constructs that do:

```
writeln("start executing on locale 0");
cobegin {
    on Locales[1] do
        writeln("this task runs on locale 1");
    on Locales[2] do
        writeln("while this one runs on locale 2");
}
writeln("back on locale 0 again");
```

- Orthogonal support for parallelism and locality is key



# SPMD Programming in Chapel Revisited

- A language may support both global- and local-view programming — in particular, Chapel does

```

proc main() {
    coforall loc in Locales do
        on loc do
            MySPMDProgram(loc.id, Locales.numElements);
}

proc MySPMDProgram(me, p) {
    ...
}
  
```



# Data-driven on-clauses

- On-clauses can also use a data-driven form...

```
cobegin {
  on node.left do
    search(node.left);
  on A[i,j] do
    bigComputation(A);
}
```

...supporting affinity between tasks and their data

*(Note that even the 'on Locales[3]' form can be considered data-driven, since each locale stores its respective locale value)*

# Placement of data


**Q:** How does data get onto other locales to begin with?

**A1:** Lexical scoping

```

var x: int;           // x is stored on locale 0
on Locales[1] {
  var y: int;          // y is stored on locale 1
  on Locales[2] {
    var z: int;         // z is stored on locale 2

    on y { y -= 1; }    // executes on locale 1
  }
}
  
```

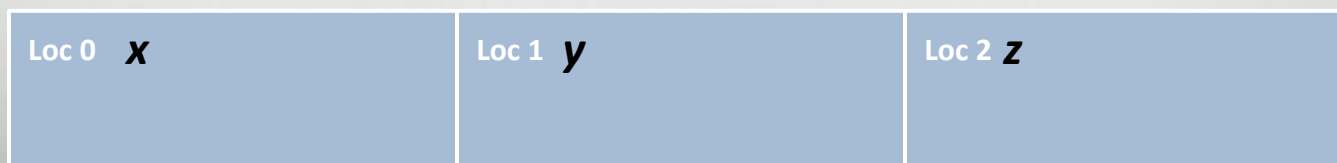

# Placement of data

**Q:** How does data get onto other locales to begin with?

**A2:** Class instances

```


class C { var x, y, z: real; var next: C;}

var myC: C;           // myC is stored on locale 0

on Locales[1] {
  myC = new C(...);    // myC's object lives on locale 1...
  on Locales[2] do
    myC.next = new C(...); // and its next is on locale 2
}

on myC do ...         // executes on locale 1
on myC.next do ...    // executes on locale 2

```

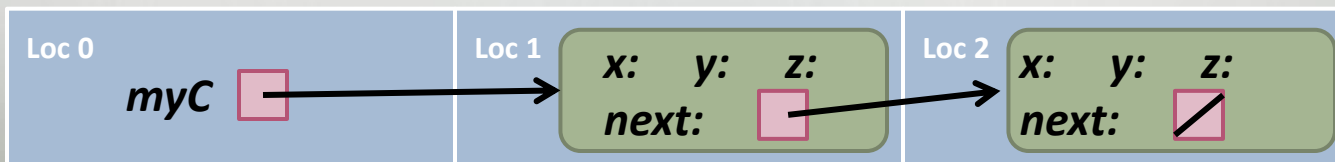

# Placement of data


**Q:** How does data get onto other locales to begin with?

**A3:** On-declarations (not yet implemented)

```

on Locales[1] var x: real; // x is stored on locale 1
on Locales[2] var y: real; // y is stored on locale 2


on x do ... // executes on locale 1
on y do ... // executes on locale 2
  
```

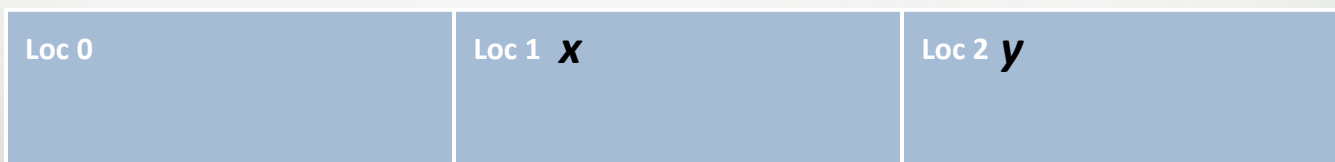

# Placement of data

**Q:** How does data get onto other locales to begin with?

**A4:** Distributed domains and arrays (next slide deck)

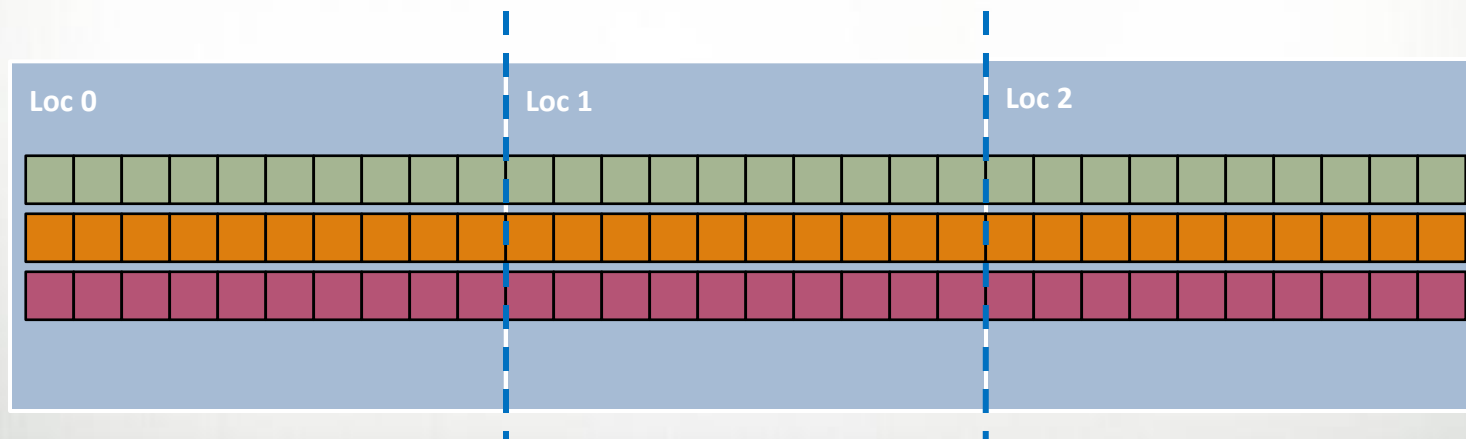

# Querying a Variable's Locale

- Syntax

```
locale-query-expr:
  expr . locale
```

- Semantics

- Returns the locale on which *expr* is stored

- Example

```
var i: int;
on Locales[1] {
  var j: int;
  writeln((i.locale.id, j.locale.id)); // outputs (0,1)
}
```

Loc 0 *i*

Loc 1 *j*

# Here

- Built-in locale variable

```
const here: locale;
```

- Semantics

- Refers to the locale on which the task is executing

- Example

```
writeln(here.id);      // outputs 0
on Locales[1] do
    writeln(here.id);  // outputs 1

on myC do
    if (here == Locales[0]) then ...
```



# Optimized Communication

- The compiler can optimize communication subject to Chapel's memory consistency model

```

var x: int;

on Locales[1] {  // on-clause implies an active message
    var y: int;
    y = x;         // in practice, read-only values like x
}                 // are bundled with the active message
  
```

# Local statement

- Syntax

```
local-stmt:
  local { stmt };
```

- Semantics

- Asserts to the compiler that all operations are local

- Example

```
on Locales[1] {
  var myC: C = ...;
  ...
  myC.x += 1; // is myC.x local?
}
```

```
on Locales[1] {
  var myC: C = ...;
  ...
  local { // assert it is
    myC.x += 1;
  }
}
```

- Note: Our current hope is to deprecate this feature, replacing it with data-centric concepts



# Status: Locales

- Most everything works correctly
  - exception: the on-declaration syntactic form
- The compiler is currently conservative about assuming variables may be remote
  - Impact: scalar performance overhead
- The compiler is currently lacking several important communication optimizations
  - Impact: scalability tends to be limited for programs with structured communication


# Future Directions

- Hierarchical Locales (currently being developed)
  - Support ability to expose hierarchy, heterogeneity within locales
  - Particularly important in next-generation nodes
    - CPU+GPU hybrids
    - tiled processors
    - manycore processors


# Questions?

- Multi-Locale Basics
  - locales
  - on-clauses
  - data placement
  - .locale
  - here
  - communication implications
  - local


# Prototypical Next-Gen Processor Technologies

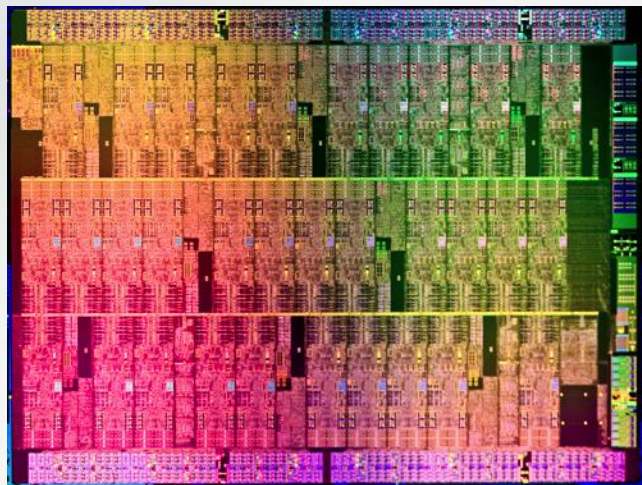


Intel MIC

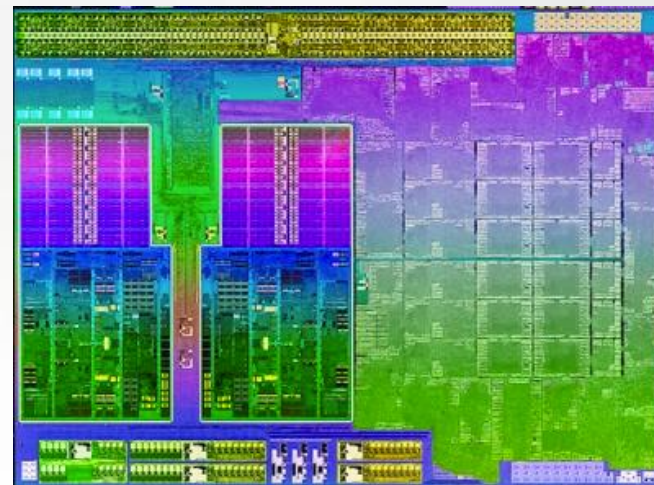

AMD Trinity

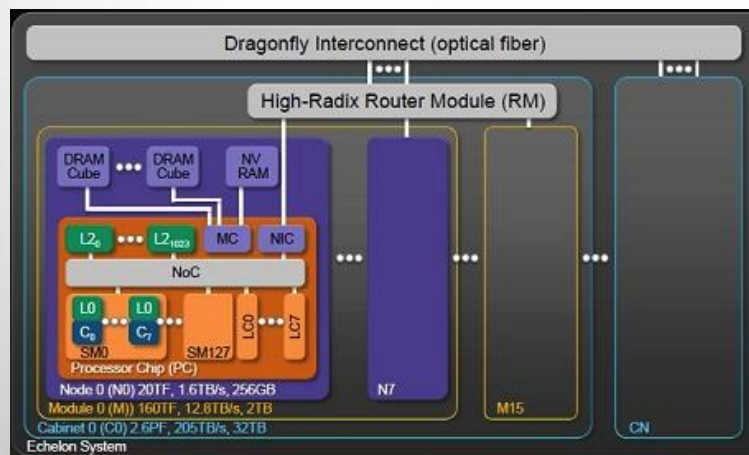





Nvidia Echelon

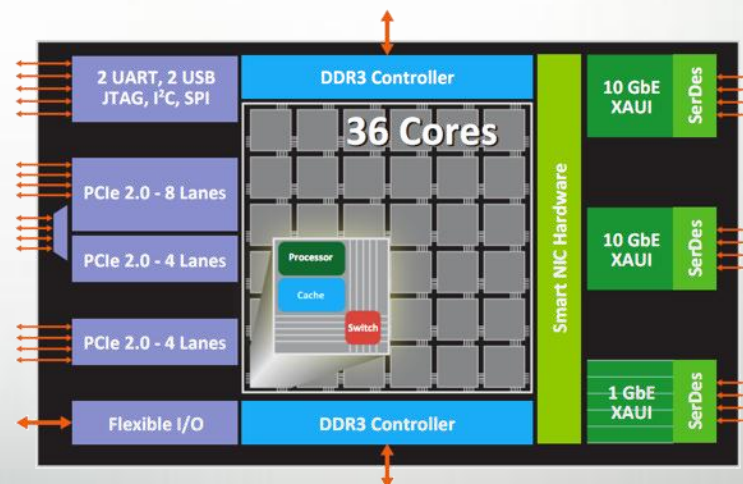

Tilera Tile-Gx



# General Characteristics of These Architectures

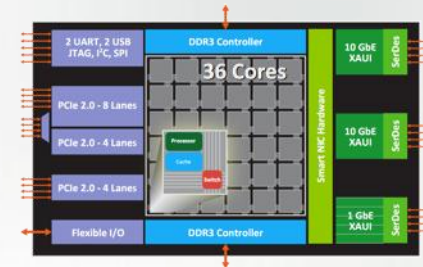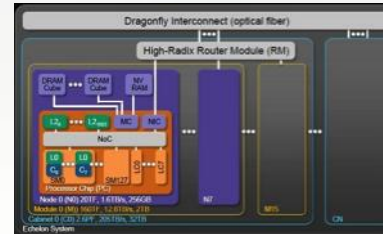


- Increased hierarchy and/or sensitivity to locality
- Potentially heterogeneous processor/memory types

⇒ Next-gen programmers will have a lot more to think about at the node level than in the past

# Locales Today

## Concept:

- Today, Chapel supports a 1D array of locales
  - users can reshape/slice to suit their computation's needs

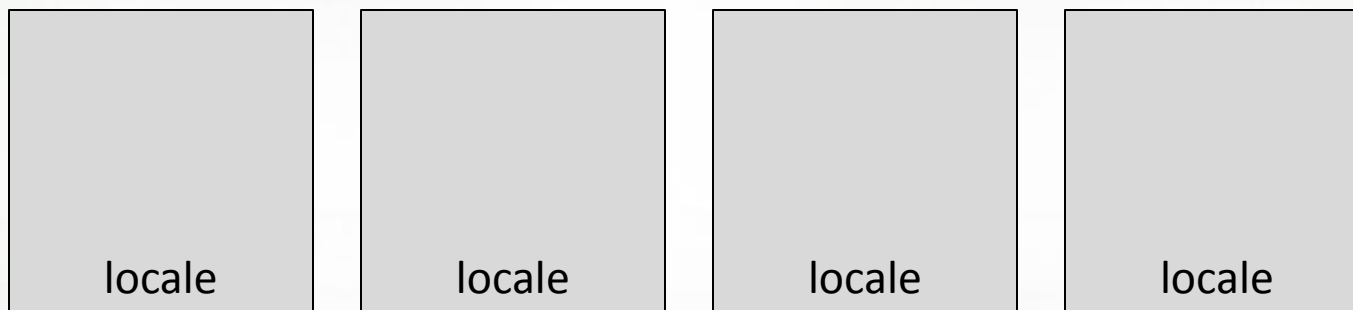


- Apart from queries, no further visibility into locale structure
  - no mechanism to refer to specific NUMA domains, processors, memories, ...
  - assumption: compiler, runtime, OS, HW can handle intra-locale concerns



# Current Work: Hierarchical Locales

## Concept:

- Support locales within locales to describe architectural sub-structures within a node

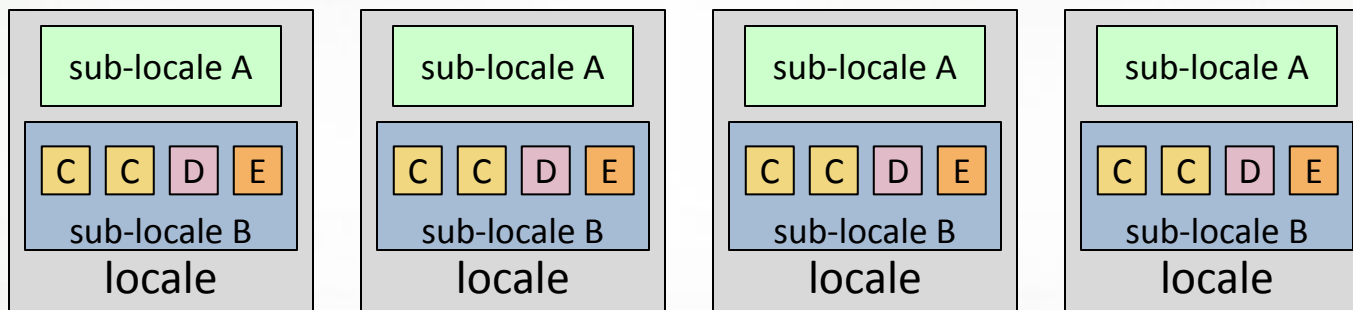

- As with traditional locales, *on-clauses* and *domain maps* can be used to map tasks and variables to a sub-locale's memory and processors
- Locale structure is defined as Chapel code
  - permits implementation policies to be specified in-language
  - introduces a new Chapel role: *architectural modeler*