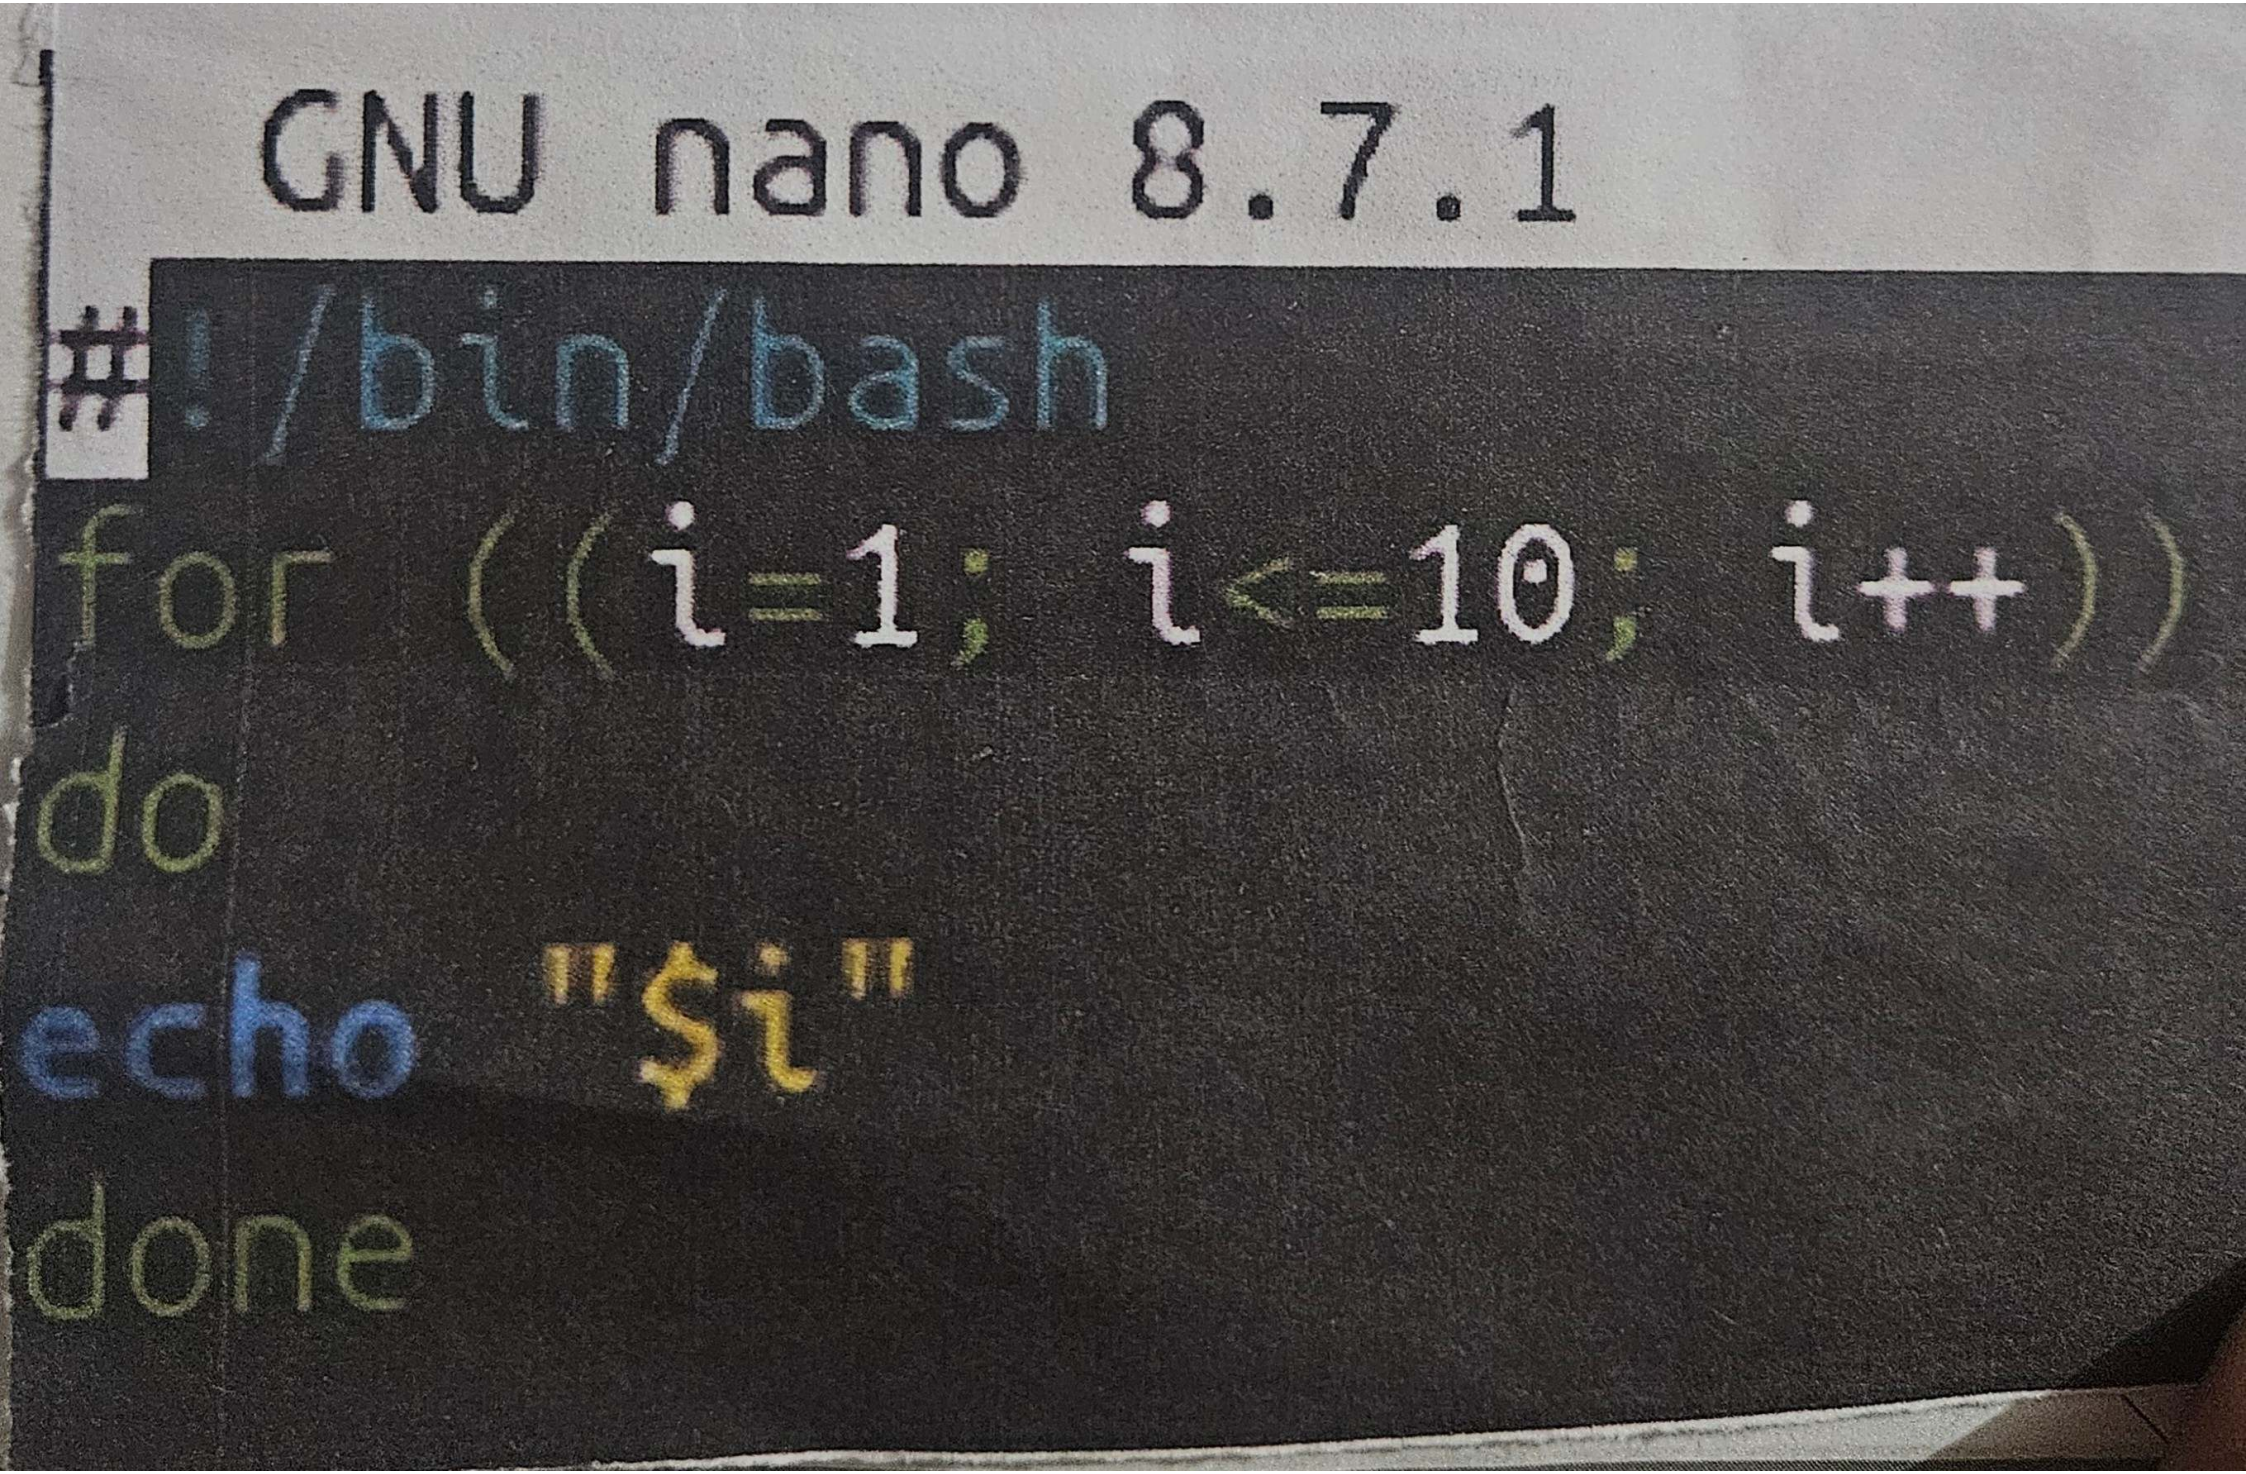
```
vboxuser@danish:~$ echo "helloo"
helloo
vboxuser@danish:~$ ls
1.sh        Music      Videos          com.sh              file1.txt  for.sh          pnz.sh
Desktop     NAMES.TXT  address.txt     comp.sh             file2.txt  names.txt.bak   record.txt
Documents   Pictures   addresses.txt   content_update.sh   file3.txt  names1.txt      snap
Downloads   Public     cars.txt        error.txt           file7.txt  new.sh          table.sh
MIET        Templates  cmd.sh          file.txt            file9.txt  newfile.txt     temp.txt
vboxuser@danish:~$ nano 1.sh
vboxuser@danish:~$ cat 1.sh

#!/bin/bash
echo "$1"
echo "$#"

vboxuser@danish:~$ . 1.sh hello
hello
1
vboxuser@danish:~$ nano comp.sh
vboxuser@danish:~$ . comp.sh hello world there
2 or more arguments passed
vboxuser@danish:~$ nano pnz.sh
vboxuser@danish:~$ bash pnz.sh
Enter Number
4
Positive
vboxuser@danish:~$ bash for.sh
1
2
3
4
5
6
7
8
9
10
vboxuser@danish:~$ nano cmd.sh
vboxuser@danish:~$ nano com.sh
vboxuser@danish:~$ bash com.sh
Enter Number
32
32 is even
vboxuser@danish:~$
```


GNU nano 8.7.1
#!/bin/bash
for ((i=1; i<=10; i++))
do
echo "$i"
done