

Practical no. 1

Name :- Danish Altaf Solkar

Enrolment no. :- 24111590805

Class :- CO3K – B

Subject :- DSU

Program :-

```
#include<stdio.h>

#include<conio.h>

int arr[20],n;

void create()

{

int i;

printf("Enter no. of elements :- ");

scanf("%d",&n);

printf("\nEnter the elements :- ");

for(i=0;i<n;i++)

{

scanf("%d",&arr[i]);

}

}

void insert()

{

int i,pos,val;

printf("Enter the position :- ");

scanf("%d",&pos);

printf("\nEnter the value to be inserted :- ");

scanf("%d",&val);

for(i=n;i>pos;i--)
```

```
{  
arr[i]=arr[i-1];  
}  
arr[pos]=val;  
n++;  
}  
void delet()  
{  
int i,pos;  
printf("Enter the position :- ");  
scanf("%d",&pos);  
for(i=pos;i<n-1;i++)  
{  
arr[i]=arr[i+1];  
}  
n--;  
}  
void display()  
{  
int i;  
printf("Array elements are :- \n");  
for(i=0;i<n;i++)  
{  
printf("%d\n",arr[i]);  
}  
}
```

```
void main()

{

int choice;

clrscr();

while(1)

{

printf("\n----MENU----");

printf("\n1.Create\n2.Insert\n3.Delete\n4.Display\n5.Exit");

printf("\n-----");

printf("\nEnter your choice :- ");

scanf("%d",&choice);

switch(choice)

{

case 1:

create();

break;

case 2:

insert();

break;

case 3:

delet();

break;

case 4:

display();

break;

case 5:
```

```
exit(0);

break;

default:

printf("Invalid choice!");

break;


}

getch();


}

}
```

OUTPUT :-

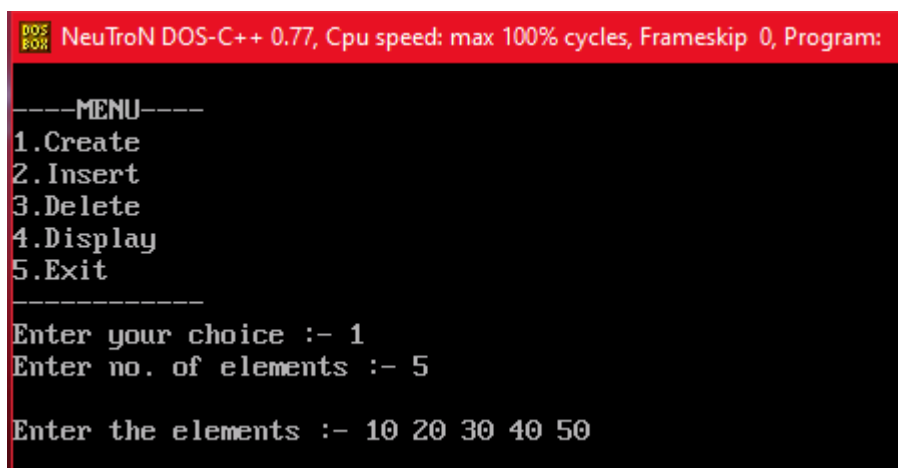

```
NeuTrON DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program:
----MENU-----
1.Create
2.Insert
3.Delete
4.Display
5.Exit
-----
Enter your choice :- 1
Enter no. of elements :- 5
Enter the elements :- 10 20 30 40 50
```

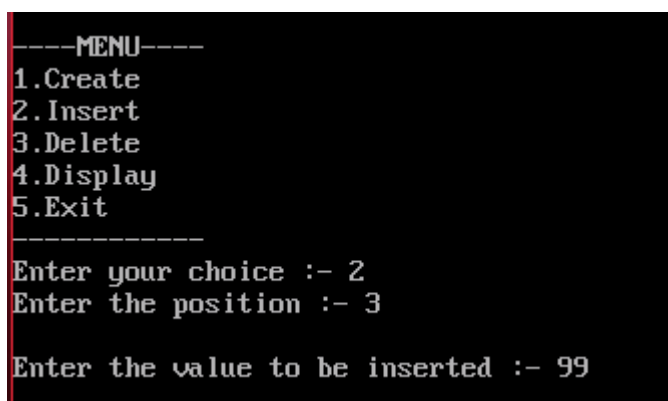

```
----MENU-----
1.Create
2.Insert
3.Delete
4.Display
5.Exit
-----
Enter your choice :- 2
Enter the position :- 3
Enter the value to be inserted :- 99
```

----MENU----

- 1.Create
- 2.Insert
- 3.Delete
- 4.Display
- 5.Exit

Enter your choice :- 3

Enter the position :- 2

----MENU----

- 1.Create
- 2.Insert
- 3.Delete
- 4.Display
- 5.Exit

Enter your choice :- 4

Array elements are :-

10

20

99

40

50

-