

Practical no. 11

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- DSU

Program :-

```
#include<stdio.h>

#include<conio.h>

#include<string.h>

void main()

{

char arr[20][10],curr[10];

int i,j,n;

clrscr();

printf("Enter no. of element :- ");

scanf("%d",&n);

printf("\nEnter %d elements :- ",n);

for(i=0;i<n;i++)

{

scanf("%s",&arr[i]);

}

printf("\nElements before sorting :- ");

for(i=0;i<n;i++)

{

printf("\n%s",arr[i]);

}

for(i=1;i<n;i++)

{

strcpy(curr,arr[i]);
```

```

j=i-1;

while(j>=0&&strcmp(arr[j],curr)>0)

{

strcpy(arr[j+1],arr[j]);

j=j-1;

}

strcpy(arr[j+1],curr);

}

printf("\nElements after sorting :- ");

for(i=0;i<n;i++)

{

printf("\n%s",arr[i]);


}

getch();

}

```

OUTPUT :-

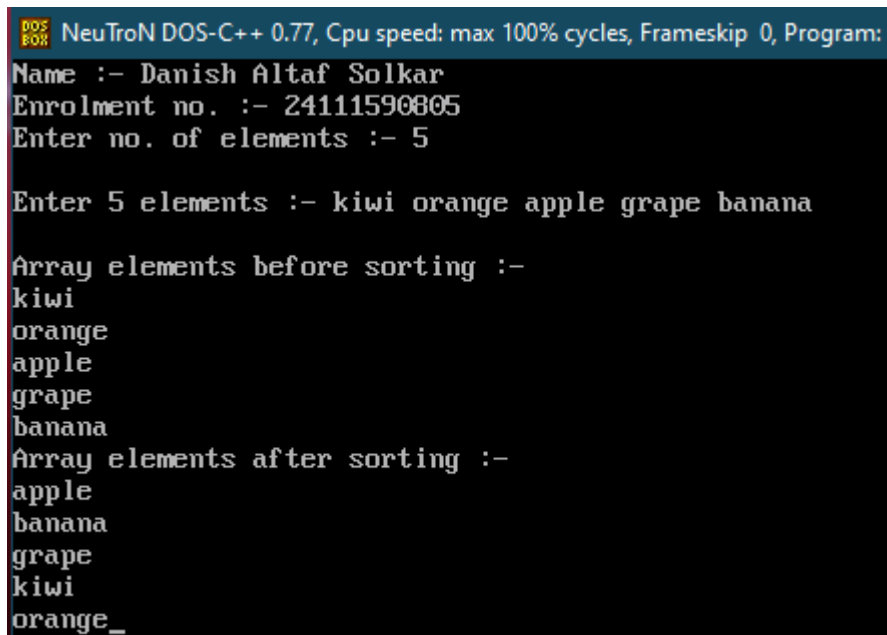

The screenshot shows a DOS-C++ environment window titled "NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program:". The program prompts the user for their name and enrolment number, then asks for the number of elements to sort (5). It then prompts for the elements themselves, which are "kiwi orange apple grape banana". The program then displays the array elements before sorting and after sorting. The output shows the array elements before sorting as "kiwi", "orange", "apple", "grape", "banana". After sorting, the array elements are "apple", "banana", "grape", "kiwi", and "orange_".

```

DOS BOX NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program:
Name :- Danish Altaf Solkar
Enrolment no. :- 24111590805
Enter no. of elements :- 5

Enter 5 elements :- kiwi orange apple grape banana

Array elements before sorting :-
kiwi
orange
apple
grape
banana
Array elements after sorting :-
apple
banana
grape
kiwi
orange_

```