

Practical no. 6

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- DSU

Program :-

```
#include<stdio.h>

#include<conio.h>

void main()

{

int arr[20],i,j,n,temp;

clrscr();

printf("Enter the no. of elements :- ");

scanf("%d",&n);

printf("\nEnter %d elements :- \n",n);

for(i=0;i<n;i++)

{

scanf("%d",&arr[i]);

}

printf("\nArray elements before sorting :- \n");

for(i=0;i<n;i++)

{

printf("%d\n",arr[i]);

}

for(i=1;i<n;i++)

{

for(j=0;j<n-i;j++)

{

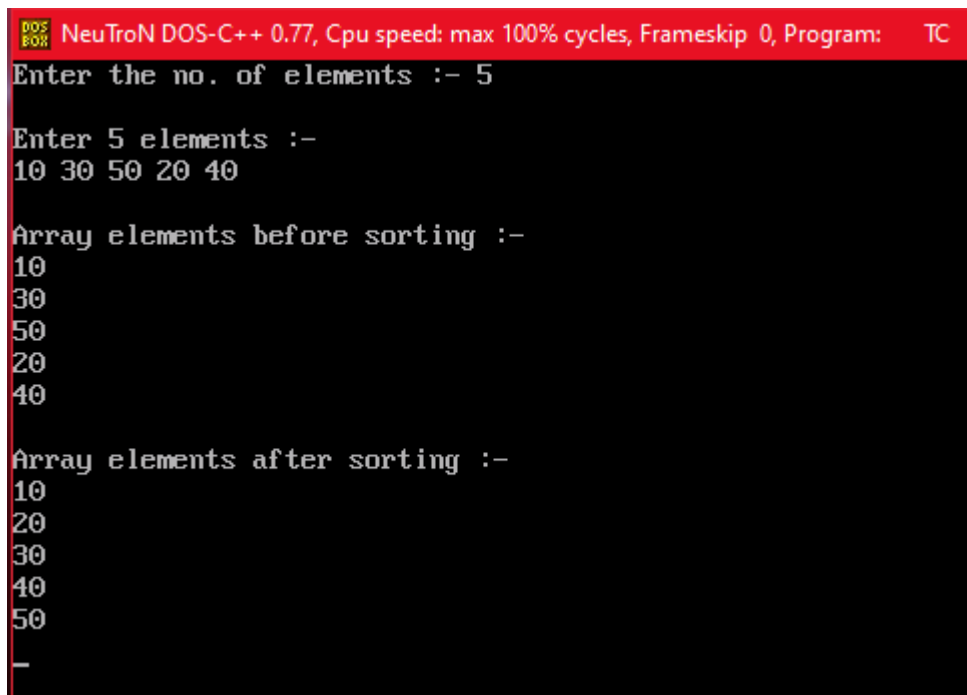
if(arr[j]>arr[j+1])

{

temp=arr[j];
```

```
arr[j]=arr[j+1];
arr[j+1]=temp;
}
}
}
printf("\nArray elements after sorting :- \n");
for(i=0;i<n;i++)
{
printf("%d\n",arr[i]);
}
getch();
}
```

OUTPUT :-

A screenshot of a DOS-C++ program execution. The window title bar is red and contains the text "DOS BOX NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program: TC". The background is black with white text. The program prompts the user to enter the number of elements, which is 5. Then it prompts to enter 5 elements, and the user enters 10, 30, 50, 20, 40. The program then displays the array elements before sorting (10, 30, 50, 20, 40) and after sorting (10, 20, 30, 40, 50).

```
DOS BOX NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program: TC
Enter the no. of elements :- 5
Enter 5 elements :-
10 30 50 20 40
Array elements before sorting :-
10
30
50
20
40
Array elements after sorting :-
10
20
30
40
50
-
```