

Practical no. 1

Name :- Danish Altaf Solkar

Enrolment no. :-24111590805

Class :- CO3K – B

Subject :- OOP

Aim :- To evaluate following expression using input output function:

$$y = 5 * x - 5$$

Program :-

```
#include<iostream.h>

#include<conio.h>

void main()

{

int x, y;

clrscr();

cout<<"Enter value of x :-";

cin>>x;


y=5*x-5;

cout<<"\nValue of y is :- "<<y;

getch();

}
```

OUTPUT :-

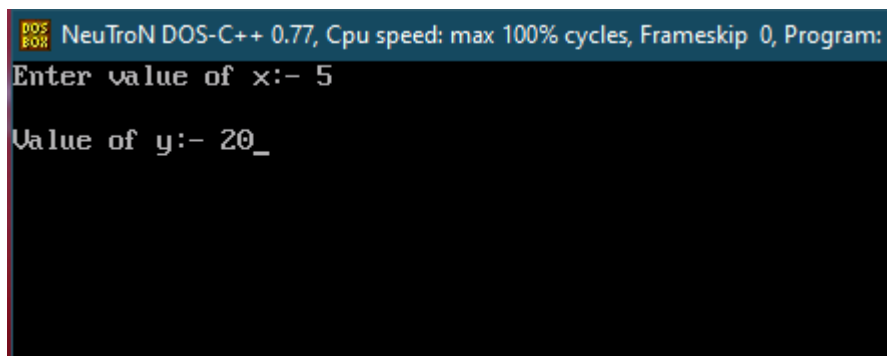A screenshot of a DOS++ terminal window. The title bar at the top reads "DOS++ NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program:". The terminal has a black background with white text. It shows the prompt "Enter value of x:-" followed by the user input "5". On the next line, it shows the output "Value of y:- 20_".

```
DOS++ NeuTroN DOS-C++ 0.77, Cpu speed: max 100% cycles, Frameskip 0, Program:
Enter value of x:- 5
Value of y:- 20_
```

Aim :- To print “hi” msg if entered value is more than 10 otherwise print “bye” msg on output screen.

Program :-

```
#include<iostream.h>

#include<conio.h>

void main()

{

int no;

clrscr();

cout<<"Enter a number :- ";


cin>>no;

(no>10)?cout<<"HII" : cout<<"BYE";


getch();

}
```

OUTPUT :-

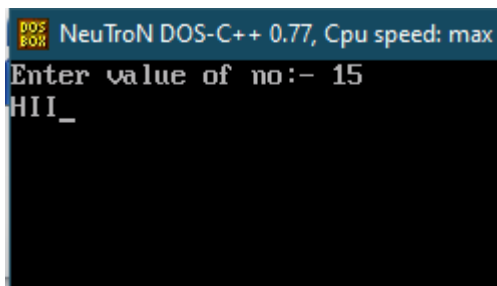

DOS BOX NeuTroN DOS-C++ 0.77, Cpu speed: max
Enter value of no:- 15
HII_

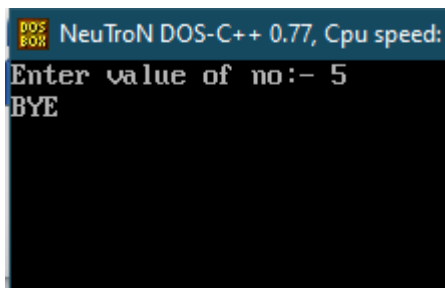

DOS BOX NeuTroN DOS-C++ 0.77, Cpu speed:
Enter value of no:- 5
BYE

Aim :- To print largest number among two number using Conditional operator.

Program :-

```
#include<iostream.h>

#include<conio.h>

void main()

{

int num1,num2;

clrscr();

cout<<"Enter value of num1 :- ";

cin>>num1;

cout<<"\nEnter value of num2 :- ";


cin>>num2;

(num1>num2)?cout<<"\nLargest no. is "<<num1:cout<<"\nLargest no. is "<<num2;


getch();

}
```

OUTPUT :-

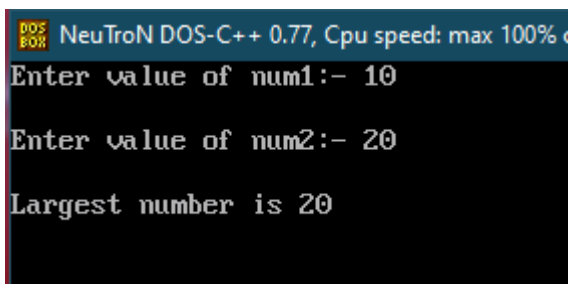

NeuTroN DOS-C++ 0.77, Cpu speed: max 100%
Enter value of num1:- 10
Enter value of num2:- 20
Largest number is 20

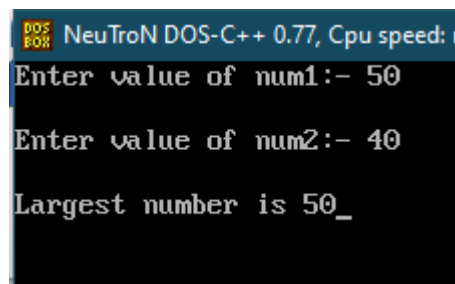

NeuTroN DOS-C++ 0.77, Cpu speed: max 100%
Enter value of num1:- 50
Enter value of num2:- 40
Largest number is 50_

Practical Related Questions :-

Write a C++ program to evaluate the following expressions:

$$X = \frac{-b - (b^2 - 4ac)}{2a}$$

Program:-

```
#include<iostream.h>

#include<conio.h>

void main()

{

int x,b,a,c;

clrscr();

cout<<"Enter value of a :- ";

cin>>a;

cout<<"\nEnter value of b :- ";

cin>>b;

cout<<"\nEnter value of c :- ";

cin>>c;


x=(-b-(b*b-4*a*c))/2*a;

cout<<"\nValue of X is "<<x;

getch();

}
```

OUTPUT :-

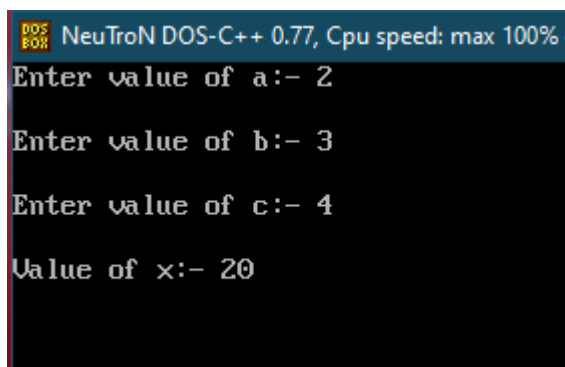A screenshot of a DOS-based C++ compiler window titled "NeuTroN DOS-C++ 0.77, Cpu speed: max 100%". The window has a black background with white text. It shows the program's execution with the following prompts and user input: "Enter value of a :- 2", "Enter value of b :- 3", "Enter value of c :- 4", and "Value of x :- 20".

```
NeuTroN DOS-C++ 0.77, Cpu speed: max 100%
Enter value of a :- 2
Enter value of b :- 3
Enter value of c :- 4
Value of x :- 20
```